


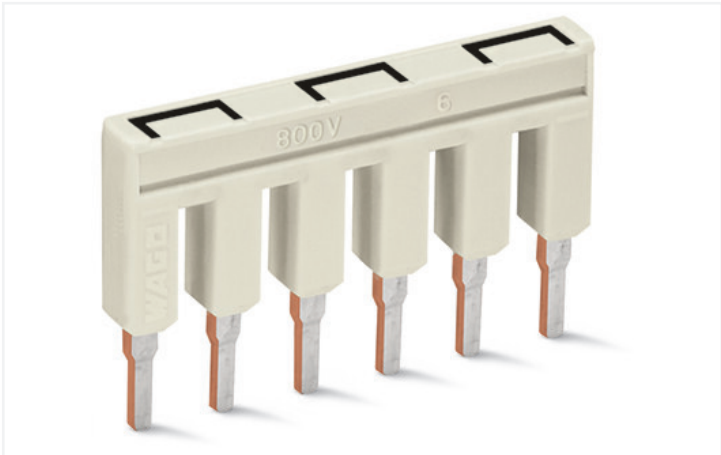

Color: ■ light gray Similar to illustration

Electrical data

Ratings per IEC/EN	
Nominal voltage (III/3)	800 V
Rated current	13.5 A

Physical data

Width	20 mm / 0.787 inches
Height	4.1 mm / 0.161 inches
Depth	19 mm / 0.748 inches
Jumper assignment	1-2 3-4 5-6

Material data

Note (material data)	Information on material specifications can be found here
Color	light gray
Fire load	0.013 MJ
Weight	1.6 g

Commercial data

eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 8.0	EC000489
ETIM 7.0	EC000489
PU (SPU)	25 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143695787
Customs tariff number	85366990990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2000-406/020-000	↓

Documentation

Additional Information		
Technical Section	pdf 2246.92 KB	↓

Bid Text			
2000-406/020-000	19.02.2019	xml 2.54 KB	↓
2000-406/020-000	27.04.2017	doc 23.50 KB	↓


CAD/CAE-Data

CAD data	
2D/3D Models 2000-406/020-000	↓

CAE data	
EPLAN Data Portal 2000-406/020-000	↓
WSCAD Universe 2000-406/020-000	↓
ZUKEN Portal 2000-406/020-000	↓

Installation Notes

Commoning



This delta jumper has been specially developed to create a delta configuration and is used on motor terminal boards equipped with rail-mount terminal blocks TOPJOB® S.