


TC4S584F

Schmitt Trigger

TC4S584F is the one circuit inverter having the Schmitt trigger function at the input terminal. That is, since the circuit threshold level voltage at the leading and trailing edges of input waveform are different (VP, VN), the TC4S584F can be used in the broad range applications, including line receivers, waveform shaping circuit, astable multivibrators, and monostable multivibrators.

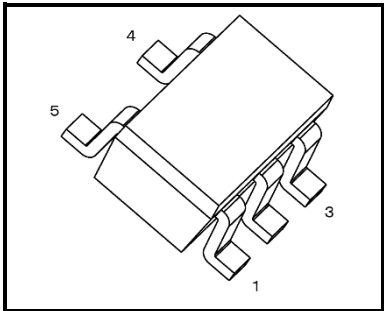

Weight
SSOP5-P-0.95 : 0.016 g (typ.)

Absolute Maximum Ratings (Ta = 25 °C) (Note)


Characteristics	Symbol	Rating	Unit
DC supply voltage	V _{DD}	V _{SS} – 0.5 to V _{SS} + 20	V
Input voltage	V _{IN}	V _{SS} – 0.5 to V _{DD} + 0.5	V
Output voltage	V _{OUT}	V _{SS} – 0.5 to V _{DD} + 0.5	V
DC input current	I _{IN}	±10	mA
Power dissipation	P _D	200	mW
Operating temperature range	T _{opr}	–40 to 85	°C
Storage temperature range	T _{stg}	–65 to 150	°C
Lead temperature (10 s)	T _L	260	°C

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.


Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/“Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).


Marking

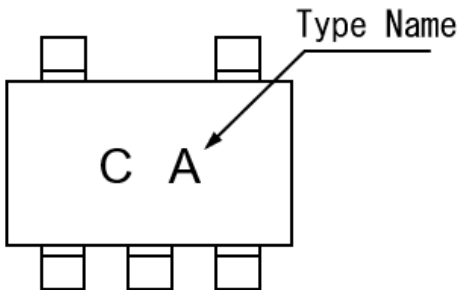

Pin Assignment

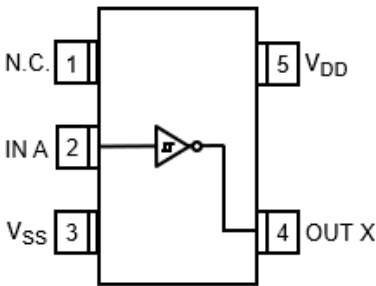

Logic Diagram



Start of commercial production
1988-05

Operating Ranges (V_{SS} = 0 V)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
DC supply voltage	V _{DD}	—	3	—	18	V
Input voltage	V _{IN}	—	0	—	V _{DD}	V

Static Electrical Characteristics (V_{SS} = 0 V)

Characteristics	Symbol	Test Condition		-40°C			25°C			85°C		Unit
				V _{DD} (V)	Min	Max	Min	Typ.	Max	Min	Max	
High-level output voltage	V _{OH}	I _{OUT} < 1 μA V _{IN} = V _{SS}	5	4.95	—	4.95	5.00	—	4.95	—	—	V
			10	9.95	—	9.95	10.00	—	9.95	—	—	
			15	14.95	—	14.95	15.00	—	14.95	—	—	
Low-level output voltage	V _{OL}	I _{OUT} < 1 μA V _{IN} = V _{DD}	5	—	0.05	—	0	0.05	—	0.05	—	V
			10	—	0.05	—	0	0.05	—	0.05	—	
			15	—	0.05	—	0	0.05	—	0.05	—	
Output high current	I _{OH}	V _{IN} = V _{SS}	V _{OH} = 4.6 V	5	-0.61	—	-0.51	-1.0	—	-0.42	—	mA
			V _{OH} = 2.5 V	5	-2.5	—	-2.1	-4.0	—	-1.7	—	
			V _{OH} = 9.5 V	10	-1.5	—	-1.3	-2.2	—	-1.1	—	
			V _{OH} = 13.5 V	15	-4.0	—	-3.4	-9.0	—	-2.8	—	
Output low current	I _{OL}	V _{IN} = V _{DD}	V _{OL} = 0.4 V	5	0.61	—	0.51	1.5	—	0.42	—	mA
			V _{OL} = 0.5 V	10	1.5	—	1.3	3.8	—	1.1	—	
			V _{OL} = 1.5 V	15	4.0	—	3.4	15.0	—	2.8	—	
Positive trigger threshold voltage*	V _P	V _{OUT} = 0.5 V V _{OUT} = 1.0 V V _{OUT} = 1.5 V	5	19.5	3.65	2.05	2.9	3.35	2.05	3.75	—	V
			10	4.3	7.1	4.5	5.9	7.1	4.7	7.2	—	
			15	6.9	10.7	7.1	9.0	10.6	7.1	10.8	—	
Negative trigger threshold voltage*	V _N	V _{OUT} = 4.5 V V _{OUT} = 9.0 V V _{OUT} = 13.5 V	5	1.05	2.75	1.1	2.1	2.6	0.95	2.65	—	V
			10	2.1	4.9	2.2	3.5	4.7	2.0	4.8	—	
			15	3.2	7.0	3.3	5.0	6.8	3.1	6.9	—	
Hysteresis voltage*	V _H	—	5	0.1	1.35	0.4	0.75	1.3	0.4	1.50	—	V
			10	1.7	3.2	1.8	2.4	3.2	1.7	3.4	—	
			15	3.1	4.8	3.2	4.0	4.8	3.2	4.9	—	
Input current	"H" level	I _{IH}	V _{IH} = 18 V	18	—	0.1	—	10 ⁻⁵	0.1	—	1.0	μA
	"L" level	I _{IL}	V _{IL} = 0 V	18	—	-0.1	—	-10 ⁻⁵	-0.1	—	-1.0	
Quiescent supply current	I _{DD}	V _{IN} = V _{SS} , V _{DD}	5	—	1	—	0.001	1	—	7.5	—	μA
			10	—	2	—	0.002	2	—	15.0	—	
			15	—	4	—	0.004	4	—	30.0	—	


Note: Values are different to TC4584BP, TC4584BF marked* (V_P, V_N, V_H).

Switching Characteristics (Ta = 25°C, Vss = 0 V, CL = 50 pF)


Characteristics	Symbol	Test Condition	VDD (V)	Min	Typ.	Max	Unit
Output transition time	t_{TLH} t_{THL}	—	5	—	80	200	ns
			10	—	50	100	
			15	—	40	80	
Propagation delay time	t_{PLH} t_{PHL}	—	5	—	170	300	ns
			10	—	80	160	
			15	—	60	120	
Input capacitance	CIN	—		—	5	7.5	pF

Circuit and Waveform for Measurement of Dynamic Characteristics


Circuit

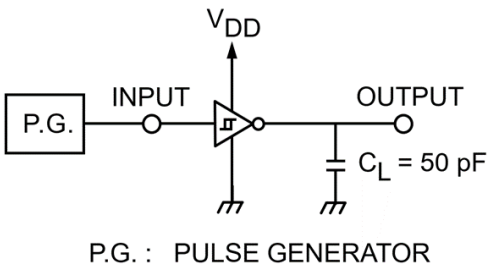

Waveform

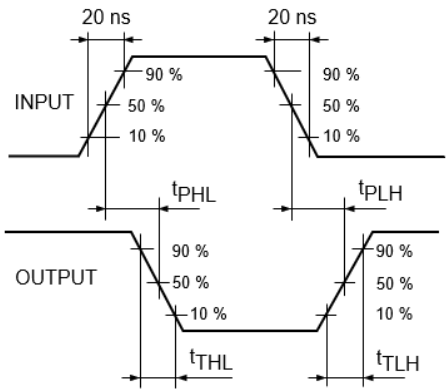


Input-Output Voltage Characteristics

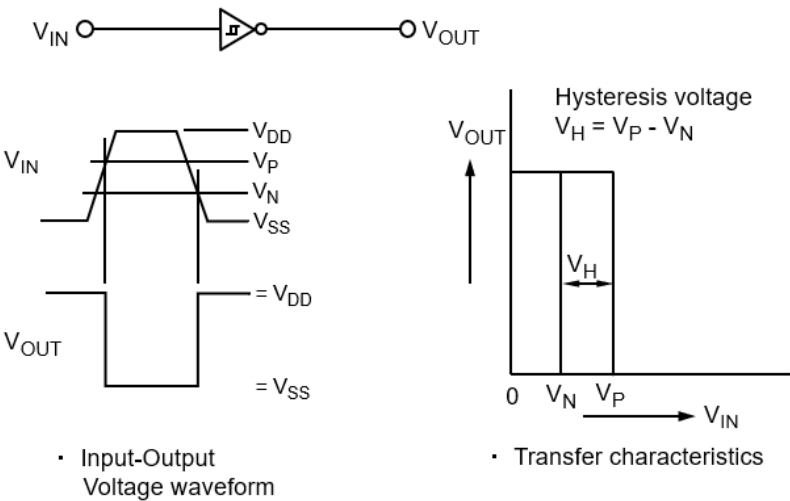

Package Dimensions

SSOP5-P-0.95

Unit : mm

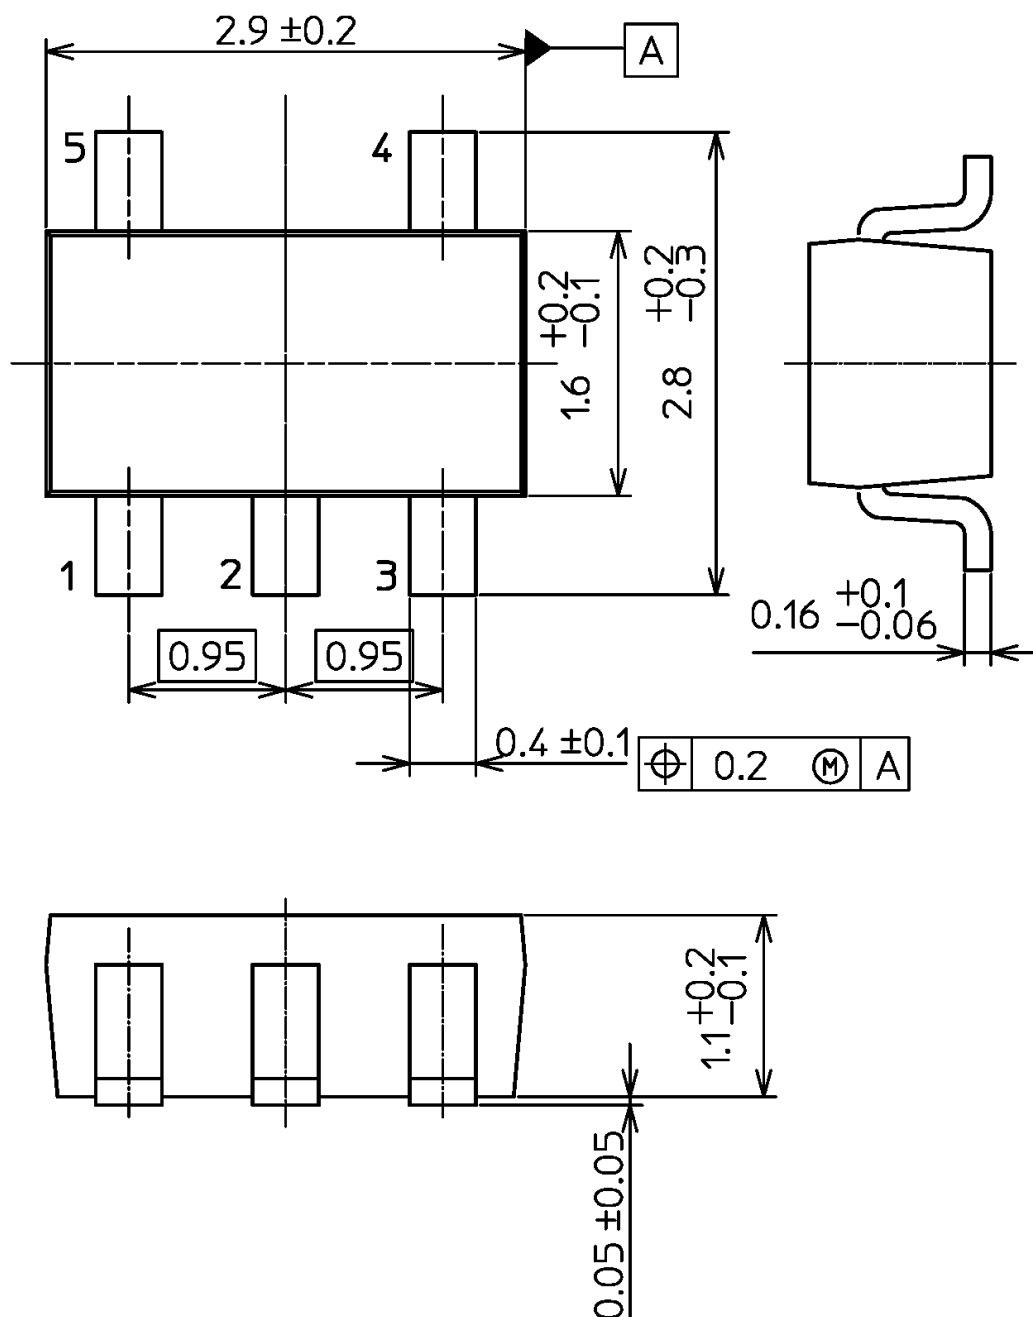

Weight: 0.016 g (typ.)

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, Class 3 medical devices, equipment used for automobiles, and military vehicles and munitions. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**