

HAS310M17BM3, HAS310M17BM3T


V_{DS} 1700 V I_{DS} 310 A

1700 V, 310 A, Silicon Carbide, Half-Bridge Module

Technical Features

- Industry Standard 62 mm Footprint
- Housing CTI ≥ 600 (Material Group I)
- Compliant with EN45545-2 R22/23 HL3
- High Humidity Operation THB-80 (HV-H3TRB)
- Low Inductance Design Optimized for SiC
- Ultra Low Loss, High-Frequency Operation
- Normally-off, Fail-safe Device Operation
- Copper Baseplate and Aluminum Nitride Insulator





Typical Applications

- Railway Auxiliary & Traction
- Induction Heating
- Motor Drives
- Renewables
- EV Fast Charging
- UPS and SMPS

System Benefits

- 62 mm Form Factor Enables System Retrofit
- Increased System Efficiency, due to Low Switching & Conduction Losses of SiC
- Zero Reverse Recovery from Schottky Diodes
- Zero Turn-off Tail Current from MOSFET

Key Parameters

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	Note
Drain-Source Voltage	V _{DS}			1700			
Gate-Source Voltage, Maximum Value	V _{GS(max)}	-10		+23	V	Transient	Note 1
Gate-Source Voltage, Recommended	$V_{GS(op)}$		-4/+15			Static	Fig. 33
DC Continuous Drain Current	I _D		409		A	$V_{GS} = 15 \text{ V}, T_C = 25 \text{ °C}, T_{VJ} \le 175 \text{ °C}$	\dashv
			307			$V_{GS} = 15 \text{ V}, T_C = 90 \text{ °C}, T_{VJ} \le 175 \text{ °C}$	
DC Source-Drain Current (Schottky Diode)	I _{SD(SD)}		482			$V_{GS} = -4 \text{ V}, T_C = 25 \text{ °C}, T_{VJ} \le 175 \text{ °C}$	
Pulsed Drain-Source Current	I _{DM}		620			t_{Pmax} limited by T_{VJmax} $V_{GS} = 15 \text{ V}, T_C = 25 ^{\circ}\text{C}$	
Power Dissipation	P _D		1630		W	T _C = 25 °C, T _{VJ} ≤ 175 °C	Note 4 Fig. 21
Virtual Junction Temperature	T _{VJ(op)}	-40		150	°C	Operation	
				175		Intermittent with Reduced Life	

Note (1): Recommended turn-on gate voltage is 15 V with ±5 % regulation tolerance. Not for use in linear region.

Note (2): Current limit calculated by $I_{D(max)} = \sqrt{(P_D/R_{DS(typ)}(T_{VJ(max)},I_{D(max)}))}$

Note (3): Verified by design

Note (4): $P_D = (T_{VJ} - T_C)/R_{TH(JC,typ)}$

MOSFET Characteristics (Per Position) (T_{VJ} = 25 °C Unless Otherwise Specified)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	Note
Drain-Source Breakdown Voltage	V _{(BR)DSS}	1700				V _{GS} = 0 V, T _{VJ} = -40 °C	
Cata Thuashald Valtaga		1.8	2.5	3.6	V	$V_{DS} = V_{GS}$, $I_{D} = 102 \text{ mA}$	
Gate Threshold Voltage	V _{GS(th)}		2.0			$V_{DS} = V_{GS}$, $I_D = 102$ mA, $T_{VJ} = 175$ °C	
Zero Gate Voltage Drain Current	I _{DSS}		26.4	2560	μА	V _{GS} = 0 V, V _{DS} = 1700 V	
Gate-Source Leakage Current	I _{GSS}		4	1000	nA	V _{GS} = 15 V, V _{DS} = 0 V	
			4.3	5.8		V _{GS} = 15 V, I _D = 310 A	
Drain-Source On-State Resistance (Devices Only)	R _{DS(on)}		8.4		mΩ	V _{GS} = 15 V, I _D = 310 A, T _{VJ} = 150 °C	Fig. 2 Fig. 3
(consist any)			9.8		-	V _{GS} = 15 V, I _D = 310 A, T _{VJ} = 175 °C	
Transconductance			290		S	V _{DS} = 20 V, I _D = 310 A	Fig. 4
	g _{fs}		284			V _{DS} = 20 V, I _D = 310 A, T _{VJ} = 150 °C	
Turn-On Switching Energy, T_{VJ} = 25 °C T_{VJ} = 125 °C T_{VJ} = 150 °C	Eon		4.4 4.1 4.0			$\begin{array}{l} V_{DD} = 900 \text{ V,} \\ I_D = 310 \text{ A,} \\ V_{GS} = -4 \text{ V/15 V,} \\ R_{G(OFF)} = 1.0 \Omega, \ R_{G(ON)} = 1.0 \Omega, \\ L = 13.6 \mu\text{H} \end{array}$	Fig. 11 Fig. 13
Turn-Off Switching Energy, T_{VJ} = 25 °C T_{VJ} = 125 °C T_{VJ} = 150 °C	E _{off}		7.2 7.4 7.4		mJ		
Internal Gate Resistance	R _{G(int)}		1.85		Ω	f = 100 kHz	
Input Capacitance	C _{iss}		31.5		_	V _{GS} = 0 V, V _{DS} = 1000 V, V _{AC} = 25 mV, f = 100 kHz	Fig. 9
Output Capacitance	C _{oss}		1.8		nF		
Reverse Transfer Capacitance	C _{rss}		45		pF		
Gate to Source Charge	Q _{GS}		320			$V_{DS} = 1200 \text{ V}, V_{GS} = -4 \text{ V}/15 \text{ V},$ $I_D = 310 \text{ A},$ Per IEC60747-8-4 pg 21	
Gate to Drain Charge	Q_{GD}		280		nC		
Total Gate Charge	Q _G		996				
FET Thermal Resistance, Junction to Case	R _{th JC}		0.092		°C/W		Fig. 17

Diode Characteristics (Per Position) (T_{VJ} = 25 °C Unless Otherwise Specified)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	Note
Diode Forward Voltage	V _F		1.78		V	$V_{GS} = -4 \text{ V}, I_F = 310 \text{ A}, T_{VJ} = 25 ^{\circ}\text{C}$	Fig. 7
			2.50			V _{GS} = -4 V, I _F = 310 A, T _{VJ} = 150 °C	
Reverse Recovery Time	t _{rr}		27		ns	$V_{GS} = -4 \text{ V}, I_{SD} = 310 \text{ A}, V_{R} = 900 \text{ V}$ di/dt = 26.5 A/ns, $T_{VJ} = 150 \text{ °C}$	Fig. 32
Reverse Recovery Charge	Qrr		4.5		μС		
Peak Reverse Recovery Current	I _{rrm}		281		А		
Reverse Recovery Energy, $T_{VJ} = 25 ^{\circ}\text{C}$ $T_{VJ} = 125 ^{\circ}\text{C}$ $T_{VJ} = 150 ^{\circ}\text{C}$	E _{rr}		3.5 3.8 3.9		mJ	$\begin{array}{c} V_{DS} = 900 \; V, I_D = 310 \; A, \\ V_{GS} = -4 \; V/15 \; V, R_{G(ext)} = 1.0 \; \Omega, \\ L = 13.6 \; \mu H \end{array}$	Fig. 14 Note 5
Diode Thermal Resistance, JCT. to Case	R _{th JC}		0.086		°C/W		Fig. 18

Note (5): SiC Schottky diodes do not have reverse recovery energy but still contribute capacitive energy

Module Physical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
			1.31			$T_{c} = 25 ^{\circ}\text{C}, I_{SD} = 310 \text{A}, \text{Note 6}$
Package Resistance, M1 (High-Side)	R ₃₋₁		1.84			T _C = 125 °C, I _{SD} = 310 A, Note 6
Problem Projector on M2 (Love Cide)			1.26		mΩ	T _C = 25 °C, I _{SD} = 310 A, Note 6
Package Resistance, M2 (Low-Side)	R ₁₋₂		1.77			T _C = 125 °C, I _{SD} = 310 A, Note 6
Stray Inductance	L _{Stray}		11.1		nH	Between DC- and DC+, f = 10 MHz
Case Temperature	T _C	-40		125	°C	
Mounting Torque		4	5	5.5	N-m	Baseplate, M6-1.0 Bolts
	Ms	4	5	5.5		Power Terminals, M6-1.0 Bolts
Weight	W		300		g	
Case Isolation Voltage	V _{isol}	5			kV	AC, 50 Hz, 1 minute
Comparative Tracking Index	СТІ	600				
Clearance Distance		9				Terminal to Terminal
		30				Terminal to Baseplate
Creepage Distance		30			mm	Terminal to Terminal
		40				Terminal to Baseplate

Note (6): Total Effective Resistance (Per Switch Position) = $MOSFET R_{DS(on)} + Switch Position Package Resistance$




Figure 1. Output Characteristics for Various Junction Temperatures




Figure 3. Normalized On-State Resistance vs. Junction Temperature




Figure 5. 3^{rd} Quadrant Characteristic vs. Junction Temperatures at $V_{GS} = 15 \text{ V}$




Figure 2. Normalized On-State Resistance vs. Drain Current for Various Junction Temperatures




Figure 4. Transfer Characteristic for Various Junction Temperatures




Figure 6. 3^{rd} Quadrant Characteristic vs. Junction Temperatures at $V_{GS} = 0$ V (Diode)




Figure 7. 3^{rd} Quadrant Characteristic vs. Junction Temperatures at $V_{GS} = -4 \text{ V (Diode)}$




Figure 9. Typical Capacitances vs. Drain to Source Voltage (0 - 1700 V)




Figure 11. Switching Energy vs. Drain Current (V_{DD} = 900 V)




Figure 8. Typical Capacitances vs. Drain to Source Voltage (0 - 200 V)




Figure 10. Threshold Voltage vs. Junction Temperature




Figure 12. Switching Energy vs. Drain Current (V_{DD} = 1200 V)




Figure 13. MOSFET Switching Energy vs. Junction Temperature




Figure 15. MOSFET Switching Energy vs. External Gate Resistance




Figure 17. MOSFET Junction to Case Transient Thermal Impedance, $Z_{th,jc}$ (°C/W)




Figure 14. Reverse Recovery Energy vs. Junction Temperature




Figure 16. Reverse Recovery Energy vs. External Gate Resistance




Figure 18. Diode Junction to Case Transient Thermal Impedance, $Z_{th,jc}$ (°C/W)




Figure 19. Switching Safe Operating Area




Figure 21. Continuous Drain Current Derating vs. Case Temperature




Figure 23. Typical Output Current Capability vs. Switching Frequency (Inverter Application)




Figure 20. Pulsed Current Safe Operating Area




Figure 22. Maximum Power Dissipation Derating vs. Case Temperature

Timing Characteristics




Figure 24. Timing vs. Source Current




Figure 26. Timing vs. Junction Temperature




Figure 28. Timing vs. External Gate Resistance




Figure 25. dv/dt and di/dt vs. Source Current




Figure 27. dv/dt and di/dt vs. Junction Temperature




Figure 29. dv/dt and di/dt vs. External Gate Resistance

Definitions

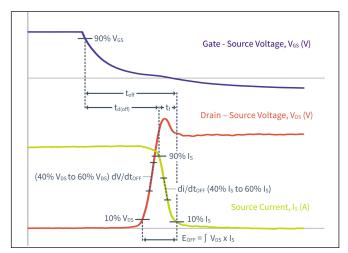


Figure 30. Turn-Off Transient Definitions




Figure 32. Reverse Recovery Definitions




Figure 31. Turn-On Transient Definitions







Figure 33. V_{GS} Transient Definitions

Schematic and Pin Out







Package Dimension (mm)

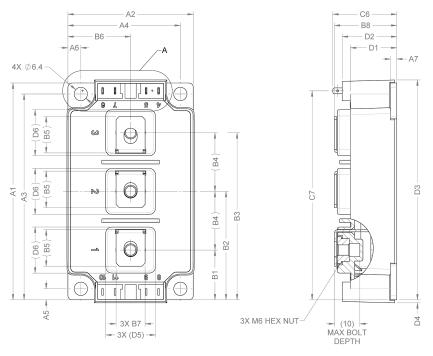

SYMBOL	DIMENSION	TOLERANCE
A1	103.5	±0.30
A2	60.44	±0.30
A3	98.25	±0.30
A4	54.22	±0.30
A5	5.25	±0.30
A6	6.22	±0.30
A7	3	±0.30
B1	23.75	±0.40
B2	51.75	±0.40
B3	79.75	±0.40
B4	(28)	REF.
B5	(17.43)	REF.
B6	30.23	±0.40
B7	(14)	REF.
B8	30.03	±0.40
C1	16.73	±0.40
C2	22.73	±0.40
C3	37.73	±0.40
C4	43.73	±0.40
C5	2.8	±0.40
C6	30.8	±0.50
C7	99.75	±0.40
C8	(6)	REF.
C9	(15)	REF.
D1	22.3	±0.30
D2	26.3	±0.30
D3	104.95	±0.30
D4	1.45	±0.40
D5	(24)	REF.
D6	(22)	REF.

DIMENSION TABLE

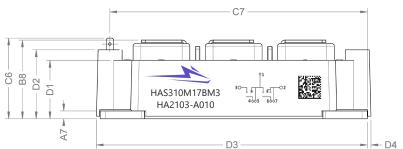



Product Ordering Code

Part Number	Description		
HAS310M17BM3	Without Pre-Applied Phase Change Thermal Interface Material		
HAS310M17BM3T	With Pre-Applied Phase Change Thermal Interface Material		

Supporting Links & Tools

Simulation Tools & Support

- All LTSpice Models
- All PLECS Models
- SpeedFit 2.0 Design Simulator™
- Technical Support Forum

Compatible Evaluation Hardware

- CGD1200HB2P-BM3: Dual Channel Differential Isolated Half Bridge Gate Driver Board
- KIT-CRD-CIL12N-BM: Dynamic Performance Evaluation Board for the BM2 and BM3 Module
- CGD1700HB2P-BM3: Evaluation Gate Driver Tool Optimized for the 1700 V BM3 Power Modules
- KIT-CRD-CIL17N-BM: Dynamic Characterization Evaluation Tool Optimized for 1700 V BM Power Modules
- CGD12HB00D: Differential Transceiver Daughter Board Companion Tool for Differential Gate Drivers

Application Notes

- PRD-07933: Wolfspeed Power Module Thermal Interface Material Application User Guide
- PRD-06379: Environmental Considerations for Power Electronics
- PRD-08710: Measuring Stray Inductance in Power Electronic Systems
- PRD-07845: Power Module Baseplate Capacitance and Electromagnetic Compatibility
- PRD-08376: Thermal Characterization Methods and Applications
- PRD-06933: Capacitance Ratio and Parasitic Turn-On

Notes & Disclaimers

WOLFSPEED PROVIDES TECHNICAL AND RELIABILITY DATA, DESIGN RESOURCES, APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT THERETO, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

The information contained in this document (excluding examples, as well as figures or values that are labeled as "typical") constitutes Wolfspeed's sole published specifications for the subject product. "Typical" parameters are the average values expected by Wolfspeed in large quantities and are provided for informational purposes only. Any examples provided herein have not been produced under conditions intended to replicate any specific end use. Product performance can and does vary due to a number of factors.

This product has not been designed or tested for use in, and is not intended for use in, any application in which failure of the product would reasonably be expected to cause death, personal injury, or property damage. For purposes of (but without limiting) the foregoing, this product is not designed, intended, or authorized for use as a critical component in equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment; air traffic control systems; or equipment used in the planning, construction, maintenance, or operation of nuclear facilities. Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer's purposes, including without limitation (1) selecting the appropriate Wolfspeed products for the buyer's application, (2) designing, validating, and testing the buyer's application, and (3) ensuring the buyer's application meets applicable standards and any other legal, regulatory, and safety-related requirements.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of www.wolfspeed.com.

REACh Compliance

REACh substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACh SVHC Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

Contact info:

4600 Silicon Drive Durham, NC 27703 USA Tel: +1.919.313.5300 www.wolfspeed.com/power

© 2025 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. PATENT: https://www.wolfspeed.com/legal/patents

The information in this document is subject to change without notice.