
molex

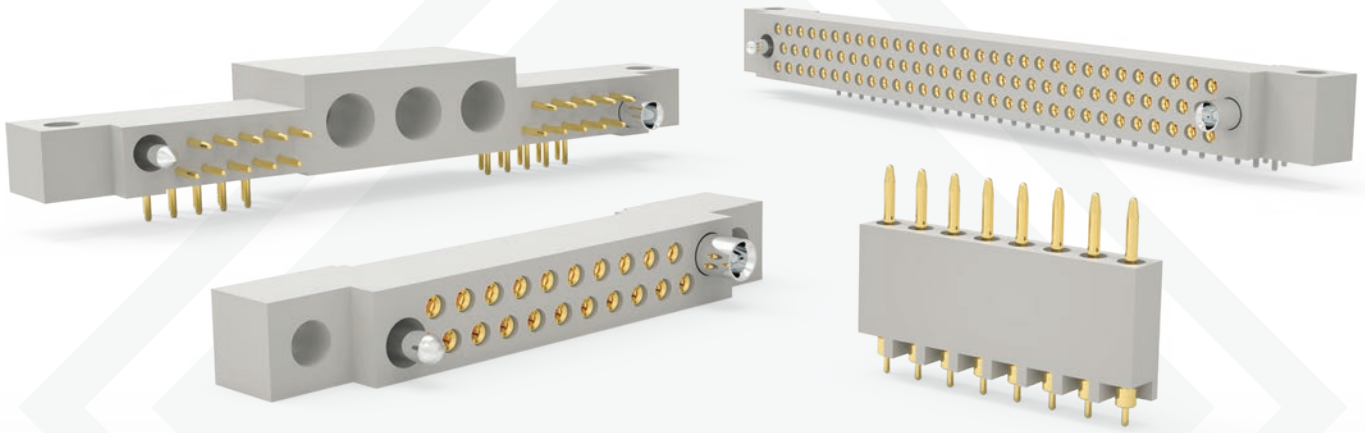

AirBorn W Series

Rectangular Plastic Board-Level Connectors — 0.100” (2.54mm)

Downloaded from Arrow.com.

TABLE OF CONTENTS

Index W-1

Mating Matrix for AirBorn W Series Connectors W-7

Specifications W-8

Performance W-9

Part Number Description W-10

One Row – Cable-to-Cable Connectors

WT - WT Right-Angle Plug to Straight Receptacle W-11

WT - WT Straight Plug to Straight Receptacle W-13

Two Row – Board-to-Board, Board-to-Cable Connectors

WTA - WTA Cable to Board or Panel W-15

WTAV - WTAX Sandwich Boards (Straight to Straight). Sizes: 10 through 70 ..... W-17

WTB - WTB PC Cable-to-Board or Chassis. Sizes: 10 through 70 ..... W-19

WTB - WTB PC Cable-to-Board or Chassis. Sizes: 90, 100 and 120 ..... W-21

WTBV - WTB Sandwich Boards. Sizes: 10 through 70 ..... W-23

WTBV - WTB Sandwich Boards. Sizes: 90 through 100 ..... W-25

WTA - WTB Cable-to-Board or PC Card. Sizes: 10 through 70 ..... W-27

WTB - WTAX PC Cable-to-Board or PC Card. Sizes: 10 through 70 ..... W-29

WTB - WTKA PC Card-to-Chassis (Crimp Removable), with Mounting Ears. Sizes: 10 through 70 ..... W-31

WTB - WTKA PC Card-to-Chassis (Crimp Removable), with Mounting Ears. Sizes: 90 through 120 ..... W-33

WTKVA - WTKA Chassis-to-Chassis (Crimp Removable), with Mounting Ears. Sizes: 10 through 70 ..... W-35

WTB - WTDXA PC Card-to-Cable (Crimp Removable), without Mounting Ears. Sizes: 10 through 70 ..... W-37

WTB - WTDXA PC Card-to-Cable (Crimp Removable), without Mounting Ears. Sizes: 90 through 120 ..... W-39

WTDVA - WTDXA Chassis-to-Chassis (Crimp Removable), without Mounting Ears. Sizes: 10 through 70 ..... W-41

WTBT Extender Board (Right-Angle Receptacle). Sizes: 10 through 70 ..... W-43

WTBT Extender Board. Size: 100 ..... W-45

Three Row – Board-to-Board, Board-to-Cable Connectors

WG - WG PC Card-to-Board or Chassis. Sizes: 50 through 104 ..... W-47

WGV - WG Sandwich Board to PC Card. Sizes: 50 through 104 ..... W-49

WG - WG PC Card-to-Board or PC Card. Sizes: 160 through 208 ..... W-51

WG - WGKA PC Card-to-Chassis (Crimp Removable), without Mounting Ears. Sizes: 80 through 160 ..... W-53

Downloaded from Arrow.com.

TABLE OF CONTENTS

WGKVA - WGKA Chassis-to-Chassis (Crimp Removable), with Mounting Ears. Sizes: 50 through 160 ..... W-55

WG - WGDXA PC Card-to-Chassis (Crimp Removable), without Mounting Ears. Sizes: 50 through 160 ..... W-57

WGDVA - WGDXA Chassis-to-Chassis (Crimp Removable), without Mounting Ears. Sizes: 50 through 160 ..... W-59

WGR - WGR PC Card-to-Board or Chassis. Size: 92 ..... W-61

WGA - WGA PC Card-to-Board or Chassis. Size: 122 ..... W-63

WGAV - WGA Sandwich Boards. Size: 122 ..... W-65

Four Row – Board-to-Board, Board-to-Cable Connectors

WRF - WRF Cable-to-Board or Panel. Size: 100 ..... W-67

WRD - WRD PC Card-to-Board or Chassis. Size: 122 ..... W-69

WRDV - WRD Sandwich Boards. Size: 122 ..... W-71

WRD - WRDDXA PC Card-to-Cable (Crimp Removable), without Mounting Ears. Size: 122 ..... W-73

Coax Hybrid – PC Card-to-Board, Board-to-Cable Connectors (SMB slide-on, 50 Ohm contacts)

WTB20-3 Signal-Coax Hybrid, PC Card-to-Board or Chassis. Sizes: 20-3 ..... W-75

WTB20-6 Signal-Coax Hybrid, PC Card-to-Board or Chassis. Sizes: 20-6 ..... W-77

WG47-1 Signal-Coax Hybrid, PC Card-to-Board or Chassis. Sizes: 47-1 ..... W-79

WRBC Coax Hybrid. Sizes 1, 7 and 11 ..... W-81

Miscellaneous Connectors

PA - PA Power Connector (#12 and #16 Contacts) to Chassis. Sizes: 5 and 4-5 ..... W-83

PA - PA Power Connector (#12 Contacts) to Chassis. Size: 10 ..... W-85

PB - PB Power Cable to Chassis. Size: 20 ..... W-87

WTA59 - WTA59 Quarter Round Sandwich Boards. Size: 59 ..... W-89

WE Stackable Board-to-Board. Size 111 ..... W-91

WE Stackable Board-to-Board. Size 135 ..... W-93

AirBorn WB Series 0.050” Rectangular Plastic Board-Level Connectors

Table of Contents W-96

Specifications W-97

Performance W-98

Part Number Description W-99

Downloaded from Arrow.com.

TABLE OF CONTENTS

Two Row – PC Card or SMT-to-Board Connectors

WB Plug, Right-Angle, with Mounting Ears W-100

WBB, WBA Plug, Straight, Surface-Mount, with Mounting Ears W-102

Hardware W-104

WB Board Layout - Plug, Right-Angle W-105

WB Board Layout - Receptacle, Straight W-106

WBB, WBA Board Layout - Plug, Straight, Surface-Mount W-107

Accessories

Floating Mounts W-109

Face Seal Gaskets for WTA-WTB Series W-110

Face Seal Gaskets for WG, WGA, WGE Series W-111

Hoods for WTA, WTAX Series W-112

Hoods for WTD, WTDX Series W-113

Adapter Sleeve, Coax Removable Tool, Extension Nuts W-115

Nut Spanner Wrench, Crimp and Removal Tools W-116

Contacts

#22 Pin Contacts, #22 Socket Contacts W-117

Crimp Removable Contacts, Coax Contacts W-118

Hardware

Fixed Jacksets, Turning Jacksets W-119

Guide Sets W-121

Hardware Availability Chart W-122


Polarization, D-Shaped Guide Sets W-124

Polarizing Pin Application W-125

Downloaded from Arrow.com.


DAUGHTERBOARD-TO-MOTHERBOARD OR CHASSIS

RIGHT-ANGLE PLUG-TO-STRAIGHT RECEPTACLE




1 Row
Sizes: 3 thru 22
Page: W-11

STRAIGHT PLUG-TO-STRAIGHT RECEPTACLE




1 Row
Sizes: 3 thru 22
Page: W-13

CABLE-TO-BOARD OR PANEL

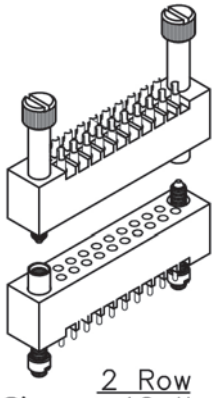


2 Row
Sizes: 10 thru 70
Page: W-15

PC CARD-TO-BOARD OR CHASSIS

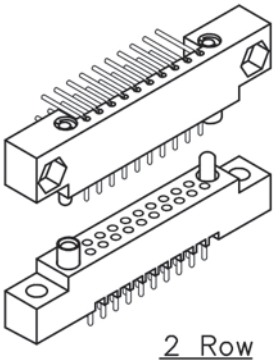


2 Row
Sizes: 10 thru 70
Page: W-19

PC CARD-TO-BOARD OR CHASSIS

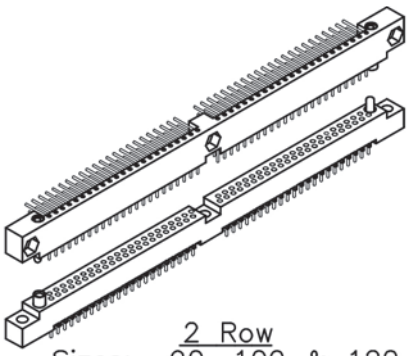


2 Row
Sizes: 90, 100 & 120
Page: W-21

CABLE-TO-BOARD OR PC CARD




2 Row
Sizes: 10 thru 70
Page: W-27

PC CARD-TO-BOARD OR PC CARD

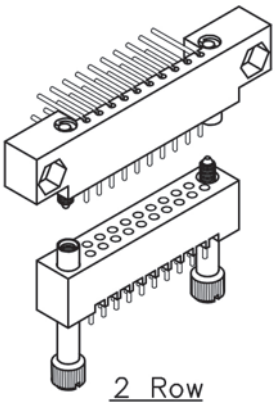

2 Row
Sizes: 10 thru 70
Page: W-29

PC CARD-TO-BOARD OR CHASSIS

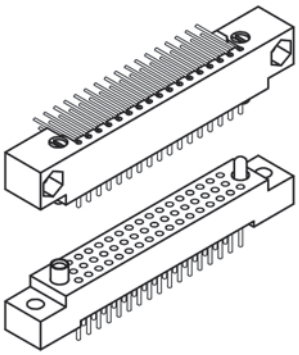


3 Row
Sizes: 50 thru 104
Page: W-47

Downloaded from Arrow.com.


DAUGHTERBOARD-TO-MOTHERBOARD OR CHASSIS

PC CARD-TO-BOARD OR PC CARD

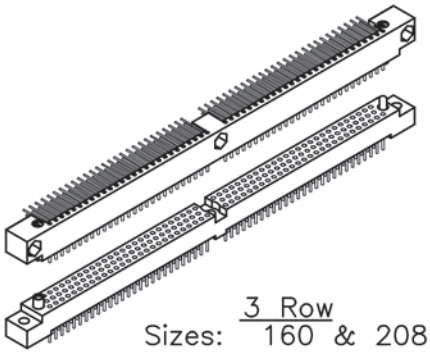


3 Row
Sizes: 160 & 208
Page: W-51

PC CARD-TO-BOARD OR CHASSIS

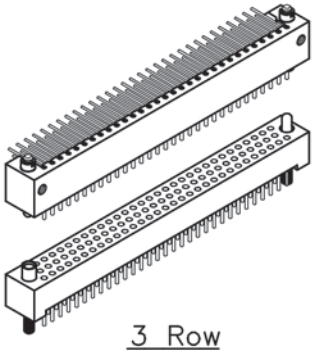


3 Row
Sizes: 92
Page: W-61

PC CARD-TO-BOARD OR CHASSIS

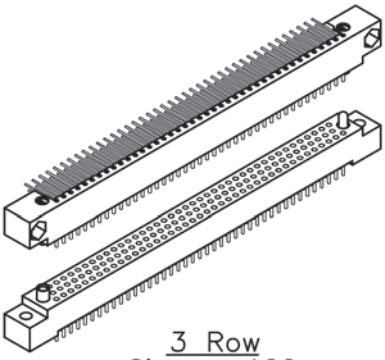


3 Row
Sizes: 122
Page: W-63

CABLE-TO-BOARD OR PANEL

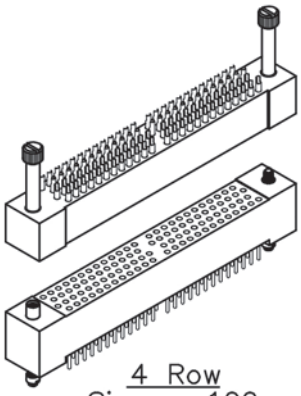

4 Row
Sizes: 100
Page: W-67


PC CARD-TO-BOARD OR CHASSIS

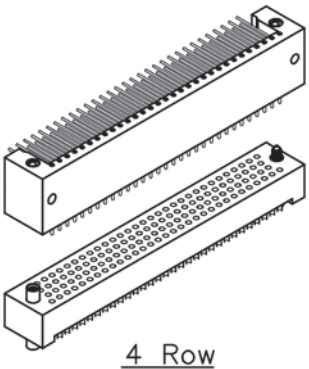


4 Row
Sizes: 122
Page: W-69

Downloaded from Arrow.com.


SANDWICH BOARDS

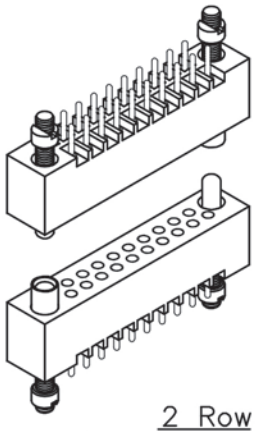


2 Row
Sizes: 10 thru 70
Page: W-17

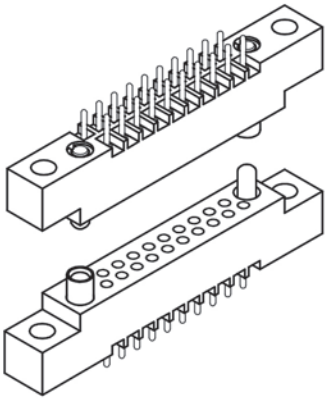


2 Row
Sizes: 10 thru 70
Page: W-23

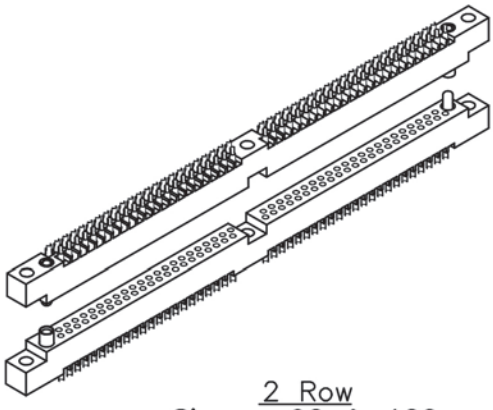


2 Row
Sizes: 90 & 100
Page: W-25



3 Row
Sizes: 50 thru 104
Page: W-49

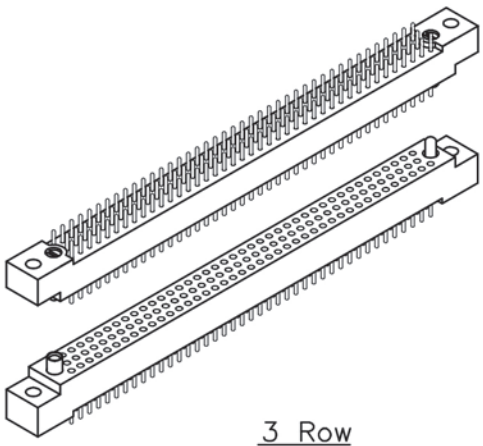

3 Row
Sizes: 122
Page: W-65

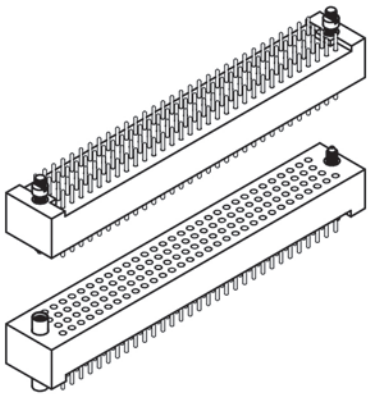


4 Row
Sizes: 122
Page: W-71

Downloaded from Arrow.com.


BOARD TO CRIMP REMOVABLE

PC CARD-TO-CHASSIS

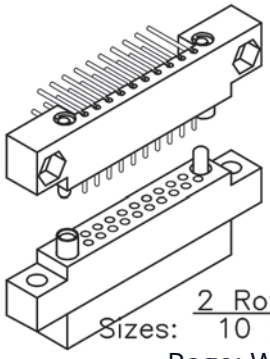


2 Row
Sizes: 10 thru 70
Page: W-31

PC CARD-TO-CHASSIS

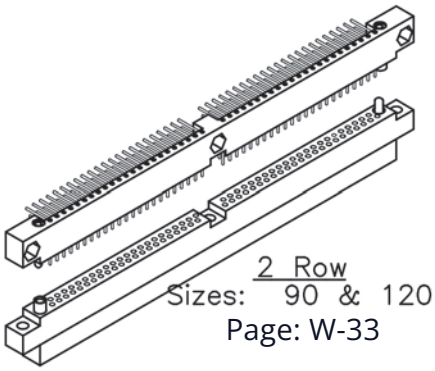


2 Row
Sizes: 90 & 120
Page: W-33

PC CARD-TO-BOARD

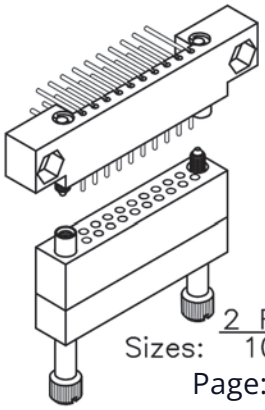


2 Row
Sizes: 10 thru 70
Page: W-37

PC CARD-TO-CHASSIS

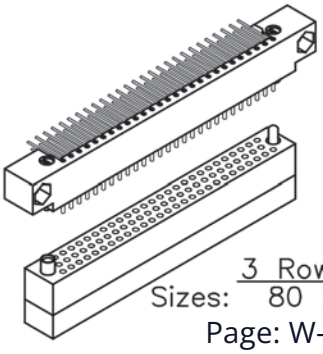


3 Row
Sizes: 80 & 160
Page: W-57

PC CARD-TO-CHASSIS




3 Row
Sizes: 80 & 160
Page: W-53

PC CARD-TO-CABLE

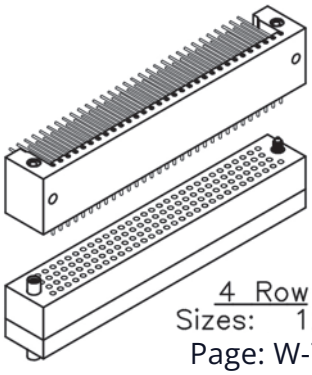


4 Row
Sizes: 122
Page: W-73

CRIMP REMOVABLE-TO-CRIMP REMOVABLE




2 Row
Sizes: 10 thru
Page: W-35

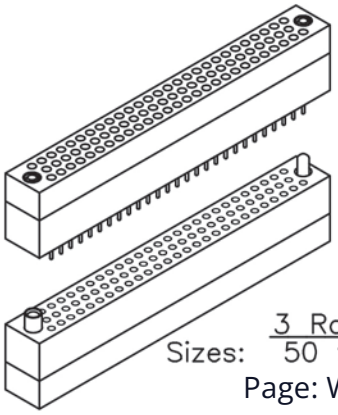


3 Row
Sizes: 50 thru 104
Page: W-59

Downloaded from Arrow.com.

EXTENDER BOARDS




2 Row
Sizes: 10 thru 70
Page: W-43

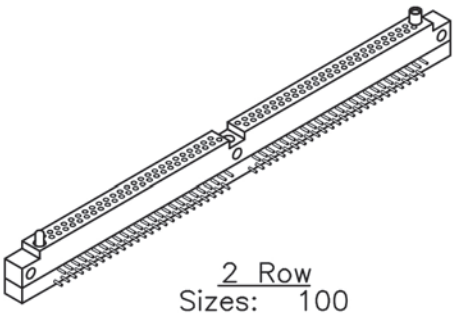

2 Row
Sizes: 100
Page: W-45


COAX CONNECTORS

PC CARD-TO-BOARD OR CHASSIS

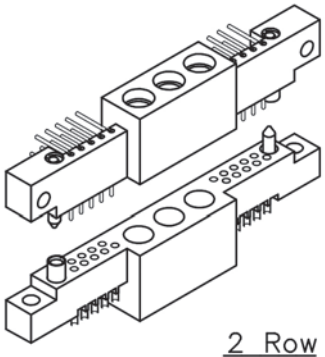


2 Row
Sizes: 20–3
Page: W-75

PC CARD-TO-BOARD OR CHASSIS

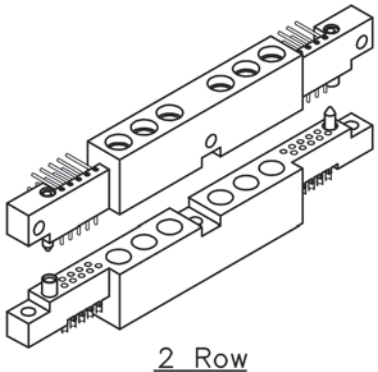


2 Row
Sizes: 20–6
Page: W-77

PC CARD-TO-CHASSIS OR BOARD

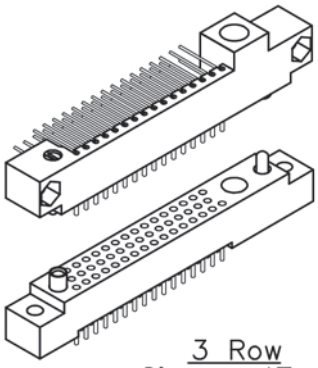

3 Row
Sizes: 47–1
Page: W-79

PC CARD-TO-CHASSIS

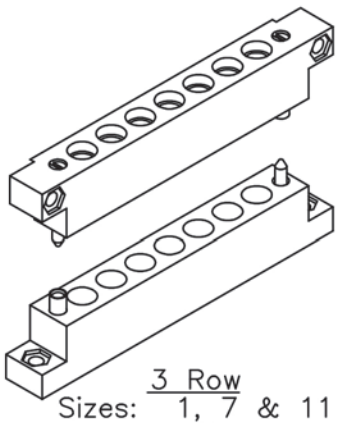


3 Row
Sizes: 1, 7 & 11
Page: W-81


Downloaded from Arrow.com.

MISCELLANEOUS CONNECTORS

POWER CABLE-TO-CHASSIS

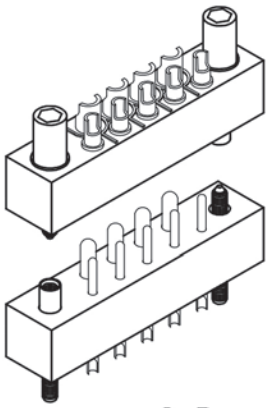


2 Row
Sizes: 5 & 4–5
Page: W-83

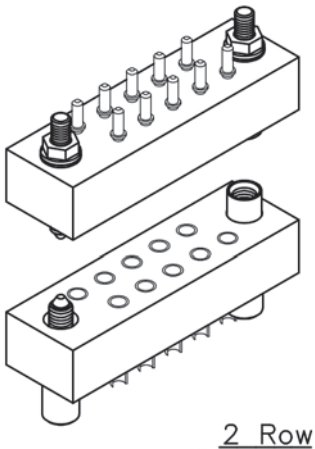


2 Row
Sizes: 10
Page: W-85

STACKABLE BOARD-TO-BOARD

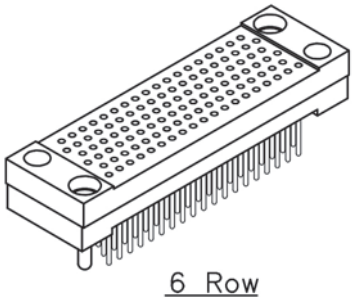


6 Row
Sizes: 111
Page: W-91

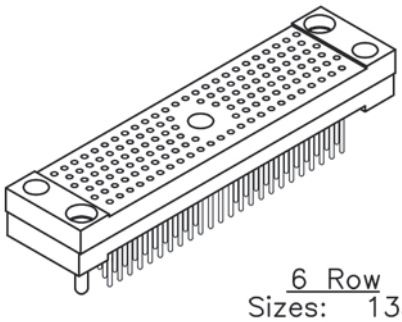

6 Row
Sizes: 135
Page: W-93

QUARTER ROUND SANDWICH BOARDS

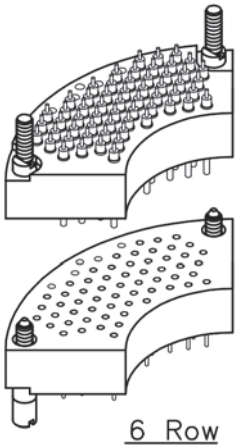

6 Row
Sizes: 59
Page: W-89

Downloaded from Arrow.com.

MATING MATRIX FOR AIRBORN W SERIES CONNECTORS

PINS	SOCKETS													
Series	**WT**	**WTA (F)**	**WTAX**	**WTB**	**WTBT**	**WTDX**	**WTK**	**WG**	**WGA**	**WGDX**	**WGK**	**WGR**	**WRD**	**WRDDX**	**WRF**
WT	X														
WTA (T)		X		X	X	X	X								
WTAV			X	X	X	X	X								
WTB*P		X	X	X	X	X	X								
WTBV		X	X	X	X	X	X								
WTDV		X	X	X	X	X	X								
WTKV		X	X	X	X	X	X								
WG*P								X		X	X				
WGV								X		X	X				
WGA*P									X						
WGAV									X						
WGDV								X		X	X				
WGKV								X		X	X				
WGR												X			
WRD*P													X	X	
WRDV													X	X	
WRF															X

I/O CONNECTORS — WT, WTA, WTAX, WTDX, WTK, WG, WGA, WGDX, WGK, WRD, WRDDX, WRF

PC BOARD MOUNTED CONNECTORS — WT, WTA, WTAX, WTB, WTBT, WG, WGA, WRD, WRF

(T) = TURNING HARDWARE

(F) = FIXED HARDWARE

Downloaded from Arrow.com.

SPECIFICATIONS – MATERIALS AND FINISHES*

PIN CONTACTS:	Copper alloy per MIL-C-55302
SOCKET CONTACTS:	Clipped contacts: Contact: BeCu per MIL-C-=55302 Terminal: Copper alloy per MIL-C-55302 Crimp removable contacts: Contact and terminal: Copper alloy per MIL-C-55302
CONTACT FINISHES:	Gold platge per ASTM B 488 OR SAE AMS 2422. Localized finish per MIL-DTL-55302 and accociated slash sheet
MOLDED INSULATORS:	Glass filled polyphenylene sulfide per MIL-M-24519 type GST-40F
JACKSCREWS:	Stainless steel per ASTM A 582/A582M. Passivated per ASTM-A967, SAE AMS QQ-P-35
JACKSOCKETS:	Stainless Steel per ASTM A 582/A582M. Passivated per ASTM-A967, SAE AMS QQ-P-35
JACKSCREW KNOBS:	Stainless steel per ASTM A 582/A582M. Passivated per ASTM-A967, SAE AMS-QQ-P-35
GUIDE PINS, GUIDE SOCKETS:	Stainless steel per ASTM A 582/A582M. Passivated per ASTM-A967, SAE AMS QQ-P-35
GUIDE SOCKETS POLARIZED D TYPE:	BeCu per ASTM-B196, ASTM B 197/197/B 197M. Nickel plated as per SAE AMS-QQ-N-290
FACE SEAL GASKET:	Silicone rubber per A-A59588

MISCELLANEOUS

CONNECTOR MARKINGS:	Contact numbers are stamped on the side of the connector. Numbers are stamped on the low-numbered side only on Two-Row and Three-row right-angle connectors
TORQUE:	Polarizing guides and floating mounts: 16 + 8/-0 inch ounces (*minimum of seven-inch-ounce reverse torque per Mil-C-55302*) Mounting and hood hardware: 24” ounces maximum Mating jacksets: 32” ounces maximum Wrap post: 2” ounce minimum per MIL-STD-1130 Helicoil Inserts: #2-56 – 24” ounce maximum. #4-40 – 32” ounce maximum
TOLERANCES:** *(Unless otherwise specified)*	Angles: ±2° Decimals: ±0.010” Fractions: ±1/64”

NOTES

Molex can manufacture special configurations for your exact specifications.

* = Reference the above listed specifications or an equivalent industry standard when applicable

Downloaded from Arrow.com.

PERFORMANCE REFERENCE M32139

CONTACT RATING: 5-amperes

SOLDERABILITY: Terminals (*except wire wrap® and crimp*) tested in accordance with MIL-STD-202, method 208 or J-STD-002

WIRE SIZE: Stranded #22 AWG (*adapter sleeves available for larger sizes or twisted pairs*).

OPERATING TEMPERATURE: -65° to +125° C or -85° to +257° F

CATEGORY	REQUIREMENTS	TEST METHOD PER: SAE AS 13441	EIA-364 EQUIVALENT
TEST VOLTAGE	1,000V, RMS, 60 Hz at sea level 300V, RMS, 60 Hz at 70,000 feet	#3001	EIA-364-20, method A IA-364-20 method A, condition IV
INSULATION RESISTANCE	5,000 megaohms min at 500 VDC	#3003	EIA-364-21
DURABILITY	500 connector mating cycles		
VIBRATION	15Gs no interruption > 1.0 µ second	#2005	EIA-364-28, condition II
SHOCK	100 Gs, no interruption > 1.0 µ second	#2005	EIA-364-27, condition G
SALT SPRAY	PASS	#1001	EIA-364-26, condition B
HUMIDITY	PASS	#1002	EIA-364-31, method IV except steps 7A and 7B
THERMAL SHOCK	PASS	#1003	EIA-364-32, method A, condition III
CONTACT RESISTANCE	0.025 volt maximum drop at 5 amperes -0.005 Ohms (interface measurement)	#3004	EIA-364-06
CONTACT ENGAGING FORCE	0.4.00 oz. maximum with 0.031 diameter test pin per SAE AS31971 and MIL-C-55302	#2014	EIA-364-37, method A
SIZES 50 AND LARGER	Upon engagement, center area of mating faces may remain open 0.010" to 0.025" due to slight flexing of molding. Vibration or shock should provide complete closure.		
GUIDES AND JACKS	If location of pin or socket contacts is reversed, location of male and female guides or jacks is also reversed; except when using D-shaped polarized guides. When polarized positions are changed, apply Loctite® 242-12 or equivalent to threads.		

Downloaded from Arrow.com.

PART NUMBER DESCRIPTION

Each part number consists of at least four elements: series, size (number of contacts), type of contacts, and type of hardware. A fifth element is added whenever special modifications or options are available.

Each catalog page shows the choices available for each of these elements. By selecting one option from each category on the page, you can build a set of connectors to meet your requirements.

Each part number is identified by a combination of letters and/or numbers of varying lengths. These elements are written together without spaces or punctuation.

SERIES:
The series designator identifies the connector body style. Some body moldings are modified to accommodate right angle pins, but carry the same series number. Follow choices on each catalog page for series selections.

SIZE:
The size is determined by the number of contacts in the connector, and is an integral part of the part number. Order only sizes shown on the catalog page.

CONTACTS:
Each page also identifies contact options for a given connector. Please note that starting with the largest connectors, we are routinely substituting low-force sockets.

HARDWARE:
Hardware options are shown on each catalog page.


NOTES:
If options or modifications are available for a given connector, it will be stated on the catalog page, or you will be referred to a different page for specific instructions. Remember when adding a suffix to the part number, add it exactly as instructed.

Each page is as comprehensive as possible. However, if you do not find a particular connector size or option, please contact the factory for further assistance.

Downloaded from Arrow.com.

ONE ROW – RIGHT-ANGLE PLUG-TO-STRAIGHT RECEPTACLE

WT - WT
0.100" I 3 THROUGH 30 CONTACTS

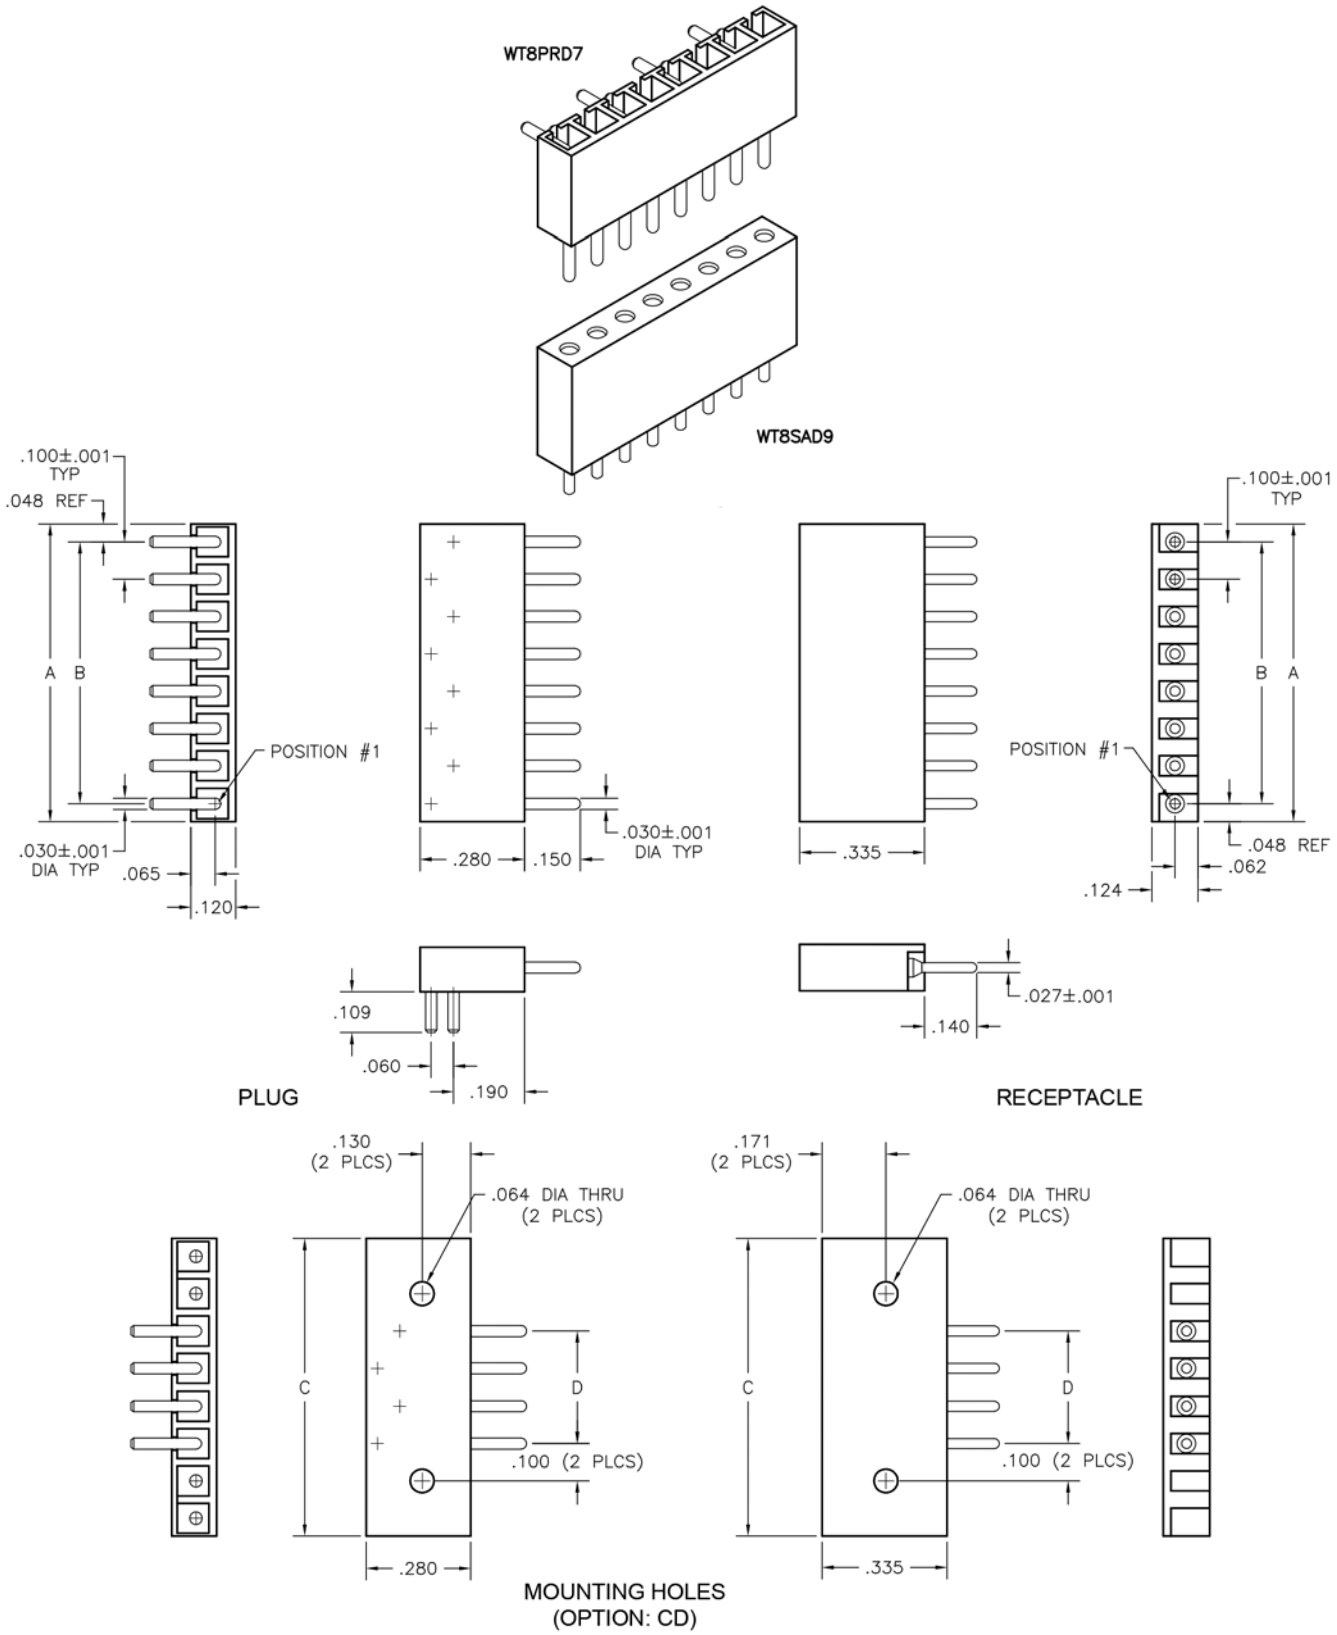

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WT 8 PRD7
RECEPTACLE: WT 8 SAD9
XX X XXXX

PLUG		RECEPTACLE	
SERIES			
WT	Plug, right angle, no mounting ears	WT	Receptacle, straight, no mounting ears
SIZE			
	Number of contacts (3 thru 22)		Number of contacts (3 thru 22)
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PRD4	Pin, right angle, dip solder, .063" x .030" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PRD7	Pin, right angle, dip solder, .109" x .030" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PRD8	Pin, right angle, dip solder, .125" x .030" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
		SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAR4	Socket, right angle, dip solder, .062" x .025" dia
		SAR7	Socket, right angle, dip solder, .109" x .025" dia
		SAR9	Socket, right angle, dip solder, .140" x .025" dia
		SARC	Socket, right angle, solder cup
		SAW40	Socket, straight, wire wrap®, .625"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WT10PC443-1. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444 Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82 Termination face sealed against conformal coating
CD Cross drilled connector for hold down screws. See page W-11. Example: WT8PRD7CD or WT8SACCD.
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

Note: The thin outboard barriers are often removed at the factory due to their fragile nature.

☒ = Option not RoHS compliant


DIMENSIONS		
SIZE	A	B
3	.296	.200
4	.396	.300
5	.496	.400
6	.596	.500
7	.696	.600
8	.796	.700
9	.896	.800
10	.996	.900
11	1.096	1.000
12	1.196	1.100
13	1.296	1.200
14	1.396	1.300
15	1.496	1.400
16	1.596	1.500
17	1.696	1.600
18	1.796	1.700
19	1.896	1.800
20	1.996	1.900
21	2.096	2.000
22	2.196	2.100

DIMENSIONS (CD)			
SIZE	# OF CONTACTS	C	D
5	1	.496	——
6	2	.596	.100
7	3	.696	.200
8	4	.796	.300
9	5	.896	.400
10	6	.996	.500
11	7	1.096	.600
12	8	1.196	.700
13	9	1.296	.800
14	10	1.396	.900
15	11	1.496	1.000
16	12	1.596	1.100
17	13	1.696	1.200
18	14	1.796	1.300
19	15	1.896	1.400
20	16	1.996	1.500
21	17	2.096	1.600
22	18	2.196	1.700

Downloaded from Arrow.com.

ONE ROW – STRAIGHT PLUG-TO-STRAIGHT RECEPTACLE

WT - WT
0.100" I 3 THROUGH 22 CONTACTS

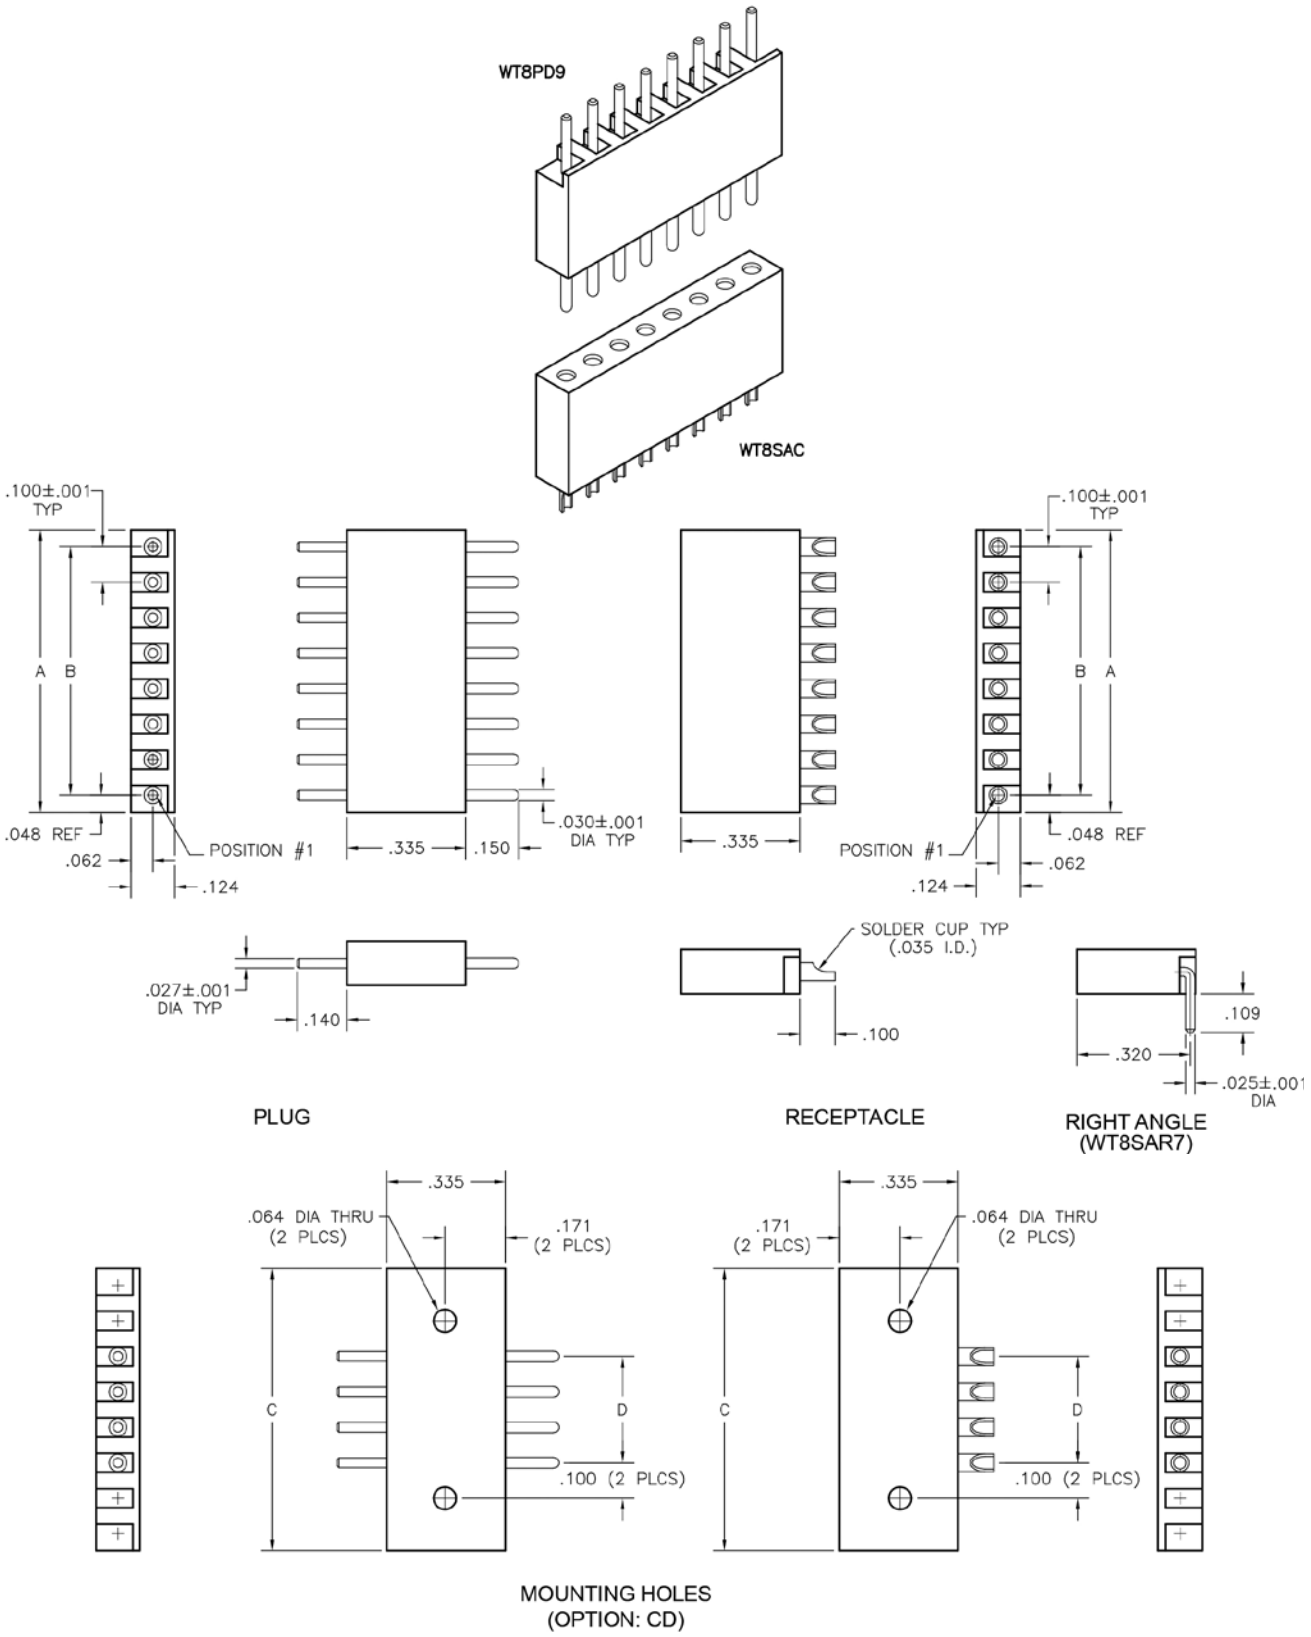

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WT 8 PD9
RECEPTACLE: WT 8 SAC
XX X XXX

PLUG		RECEPTACLE	
SERIES			
WT	Plug, straight, no mounting ears	WT	Receptacle, straight, no mounting ears
SIZE			
	Number of contacts (3 thru 22)		Number of contacts (3 thru 22)
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PF3	Pin, straight, flex circuit, .050"	SAD15	Socket, straight, dip solder, .234" x .027" dia
PF6	Pin, straight, flex circuit, .093"	SAF3	Socket, straight, flex circuit, .050"
PW40	Pin, straight, wire wrap®, .625"	SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAR4	Socket, right angle, dip solder, .062" x .025" dia
		SAR7	Socket, right angle, dip solder, .109" x .025" dia
		SAR9	Socket, right angle, dip solder, .140" x .025" dia
		SARC	Socket, right angle, solder cup
		SAW40	Socket, straight, wire wrap®, .625"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WT10PC443-1. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444 Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82 Termination face sealed against conformal coating
CD Cross drilled connector for hold down screws. See page W-13. Example: WT8PCCD or WT8SACCD.
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

Note: The thin outboard barriers are often removed at the factory due to their fragile nature.

☒ = Option not RoHS compliant


DIMENSIONS		
SIZE	A	B
3	.296	.200
4	.396	.300
5	.496	.400
6	.596	.500
7	.696	.600
8	.796	.700
9	.896	.800
10	.996	.900
11	1.096	1.000
12	1.196	1.100
13	1.296	1.200
14	1.396	1.300
15	1.496	1.400
16	1.596	1.500
17	1.696	1.600
18	1.796	1.700
19	1.896	1.800
20	1.996	1.900
21	2.096	2.000
22	2.196	2.100


DIMENSIONS (CD)			
SIZE	# OF CONTACTS	C	D
5	1	.496	——
6	2	.596	.100
7	3	.696	.200
8	4	.796	.300
9	5	.896	.400
10	6	.996	.500
11	7	1.096	.600
12	8	1.196	.700
13	9	1.296	.800
14	10	1.396	.900
15	11	1.496	1.000
16	12	1.596	1.100
17	13	1.696	1.200
18	14	1.796	1.300
19	15	1.896	1.400
20	16	1.996	1.500
21	17	2.096	1.600
22	18	2.196	1.700

Downloaded from Arrow.com.

TWO ROW – CABLE-TO-BOARD OR PANEL

WTA - WTA
0.100" I 10 THROUGH 70 CONTACTS

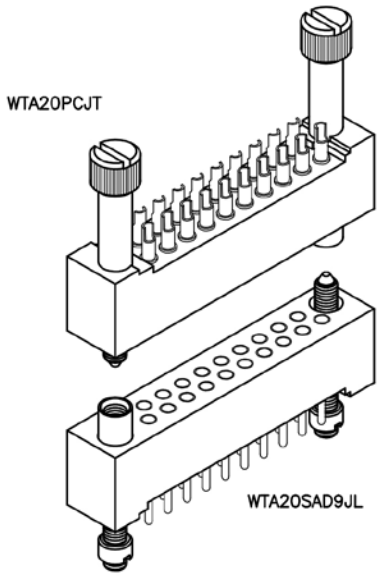

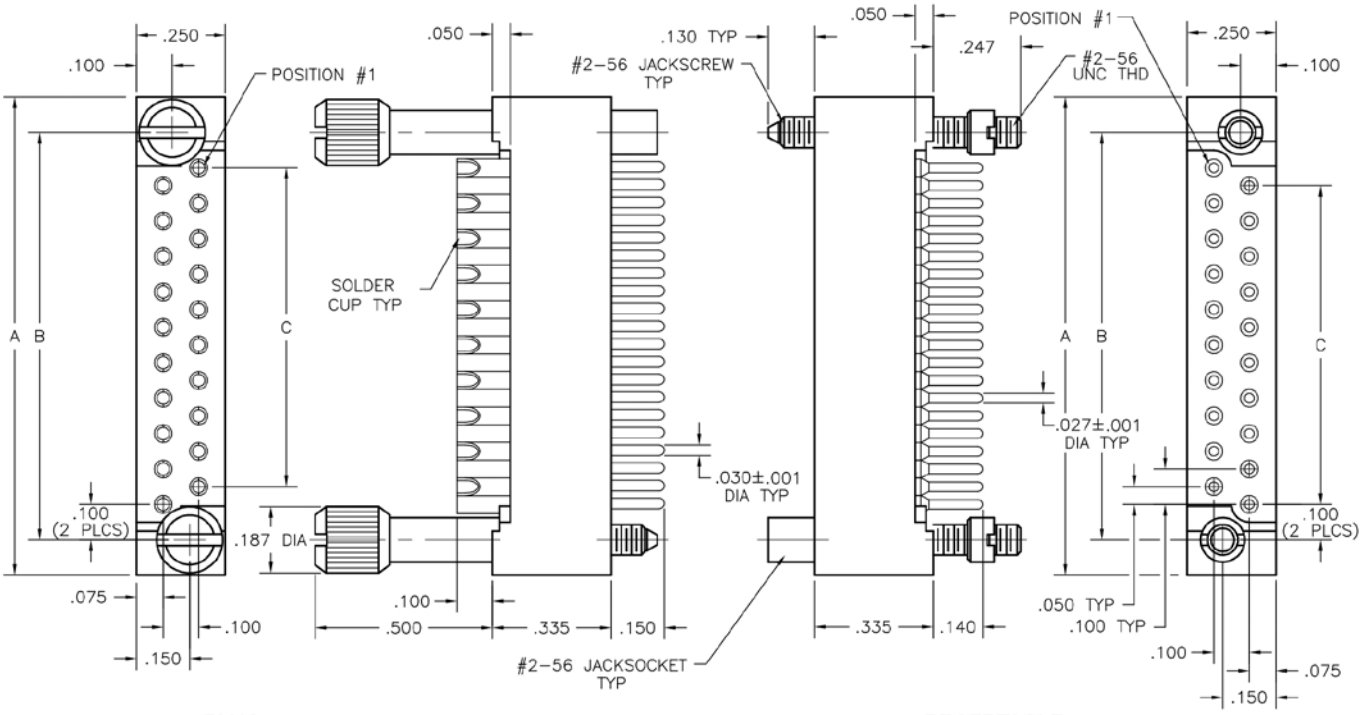

PLUG RECEPTACLE

DIMENSIONS							
SIZE	A	B	C	SIZE	A	B	C
10	.850	.650	.400	44	2.550	2.350	2.100
14	1.050	.850	.600	50	2.850	2.650	2.400
20	1.350	1.150	.900	54	3.050	2.850	2.600
24	1.550	1.350	1.100	56	3.150	2.950	2.700
26	1.650	1.450	1.200	60	3.350	3.150	2.900
30	1.850	1.650	1.400	66	3.650	3.450	3.200
36	2.150	1.950	1.700	70	3.850	3.650	3.400
40	2.350	2.150	1.900				

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WTA	20	PC	JT
RECEPTACLE:	WTA	20	SAD9	JL
	XXX	XX	XXXX	XX

SERIES

PLUG		RECEPTACLE	
WTA	Plug, straight, no mounting ears	WTA	Receptacle, straight, no mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

PLUG	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)
PD5	Pin, straight, dip solder, .078" x .027" dia
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia
PD15	Pin, straight, dip solder, .234" x .027" dia
PD20	Pin, straight, dip solder, .312" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"

HARDWARE

- Jackset hardware determines image of connector. Must specify image with guide set hardware.
- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTA10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.
- Fixed jackset, long (JL) includes jackscrew or jacksocket, #2-56 nut, #2 flat washer & #2 lockwasher.

JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, .700"
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTA10SAD9J-D01. Call factory for additional codes.


-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

TWO ROW – SANDWICH BOARDS

WTAV - WTAX
0.100" I 10 THROUGH 70 CONTACTS

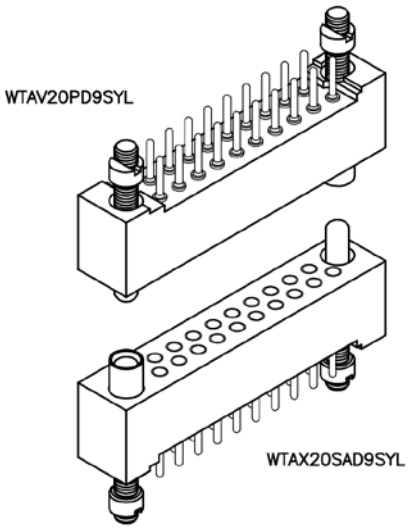

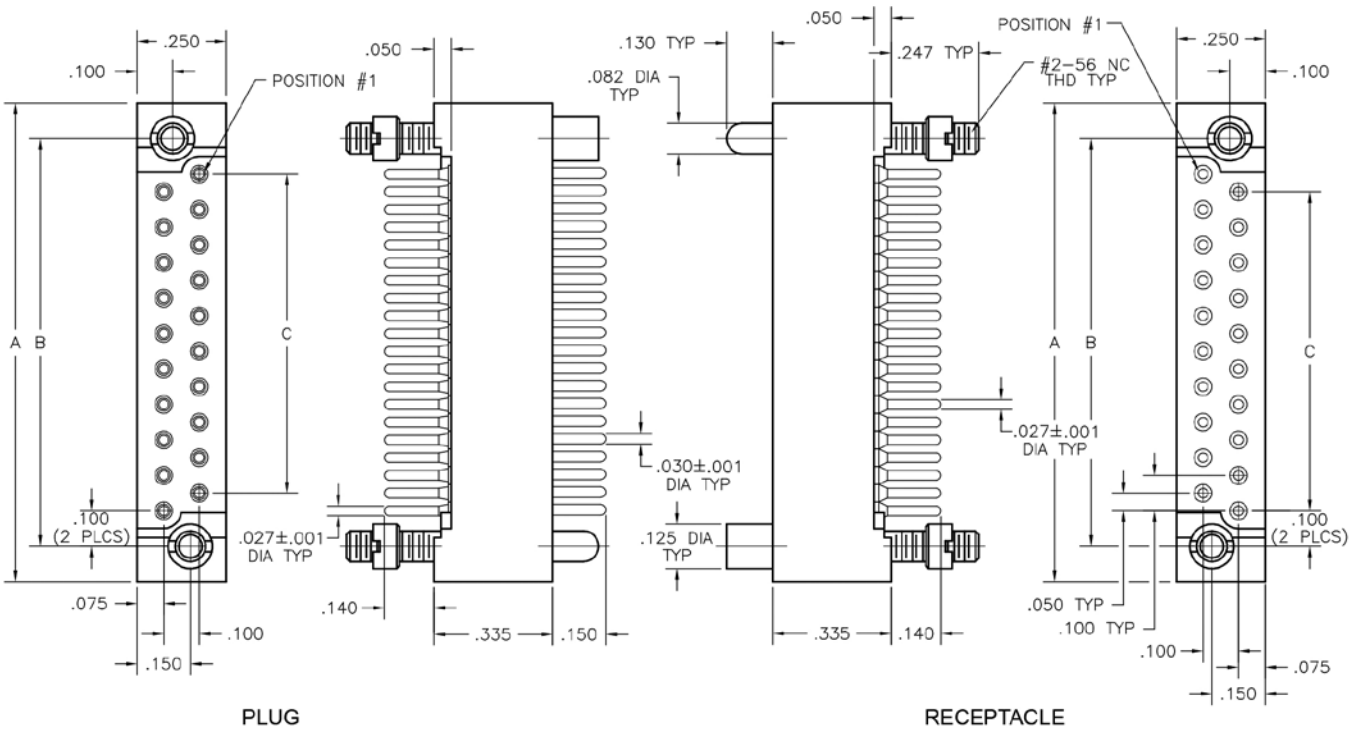

PLUG RECEPTACLE

DIMENSIONS							
SIZE	A	B	C	SIZE	A	B	C
10	.850	.650	.400	44	2.550	2.350	2.100
14	1.050	.850	.600	50	2.850	2.650	2.400
20	1.350	1.150	.900	54	3.050	2.850	2.600
24	1.550	1.350	1.100	56	3.150	2.950	2.700
26	1.650	1.450	1.200	60	3.350	3.150	2.900
30	1.850	1.650	1.400	66	3.650	3.450	3.200
36	2.150	1.950	1.700	70	3.850	3.650	3.400
40	2.350	2.150	1.900				

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTAV 20 PD9 SYL
RECEPTACLE: WTAX 20 SAD9 SYL
XXXX XX XXXX XXX

PLUG		RECEPTACLE	
SERIES			
WTAV	Plug, straight, no mounting ears	WTAX	Receptacle, straight, no mounting ears
		WTAX	Receptacle, right angle, no mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Jackset hardware determines image of connector. Must specify image with guide set hardware.
- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTAV10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.
- Fixed jackset, long (JL) includes jackscrew or jacksocket, #2-56 nut, #2 flat washer & #2 lockwasher

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
J	Fixed jackset
JL	Fixed jackset, long


SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTAV10PD9J-D01. Call factory for additional codes.

-433	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443). See "Polarization" in Accessories section.
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

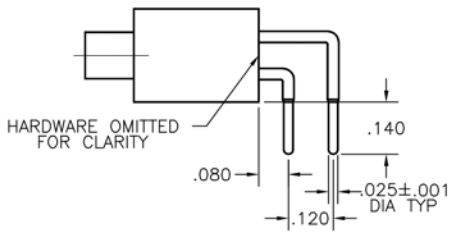



CONTACT OPTION: SOR9

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-BOARD OR CHASSIS

WTB - WTB
0.100" I 10 THROUGH 70 CONTACTS

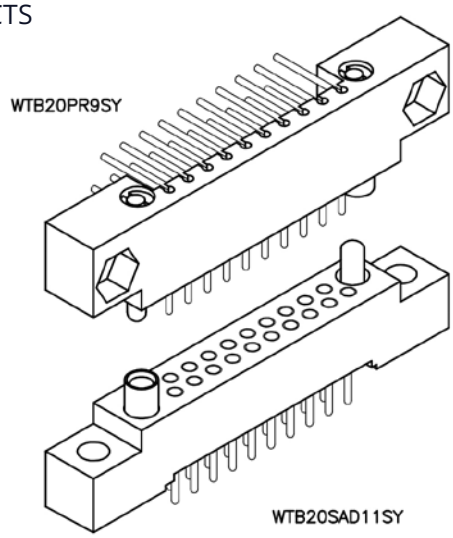

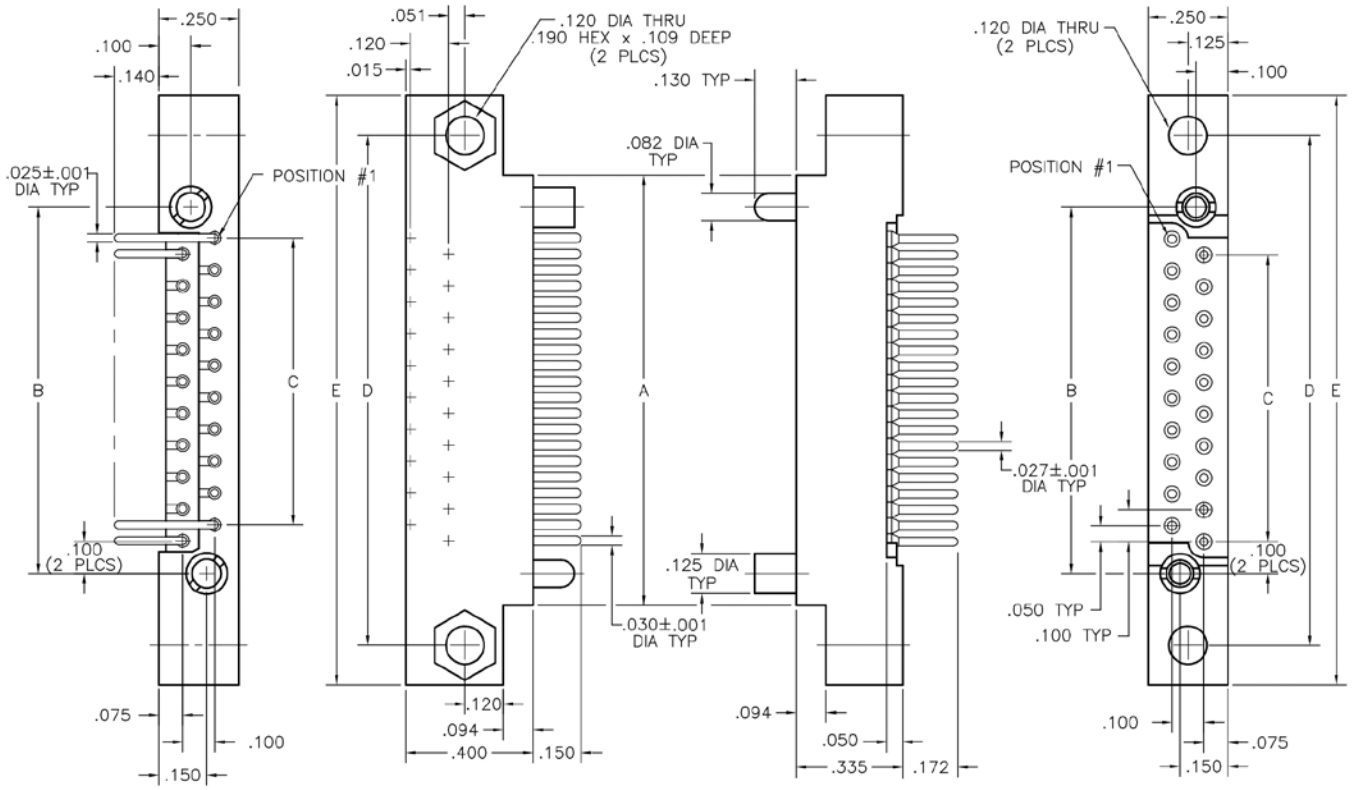

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTB 20 PR9 SY
RECEPTACLE: WTB 20 SAD11 SY
XXXX XX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTB WTB	Receptacle, straight, with mounting ears Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image. See page W-24 to switch the image.

TYPE CONTACTS/TERMINATIONS:	
PRC	Pin, right angle, solder cup (.035" I.D.)
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR13	Pin, right angle, dip solder, .203" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PR23	Pin, right angle, dip solder, .359" x .025" dia
PR30	Pin, right angle, dip solder, .470" x .025" dia
PRW33	Pin, right angle, wire wrap®, .515"
PRW40	Pin, right angle, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets; order separately or add "Q" in part number. Example: WTB10PR9QJ
  See "Gaskets" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTB10PR9SY342. Call factory for additional codes.


-342	Remove mounting ears. (.250" each end)
-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-515	Contact position noted by dash number is left open (to mate with -443). For right angle connectors only.
-548	Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82	Termination face sealed against conformal coating
-D01	Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-413	Straight pin contacts in right angle plug molding with solder cup terminations extending .100" from face.


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-BOARD OR CHASSIS

WBB - WTB
0.100" **I** 90, 100 AND 120 CONTACTS

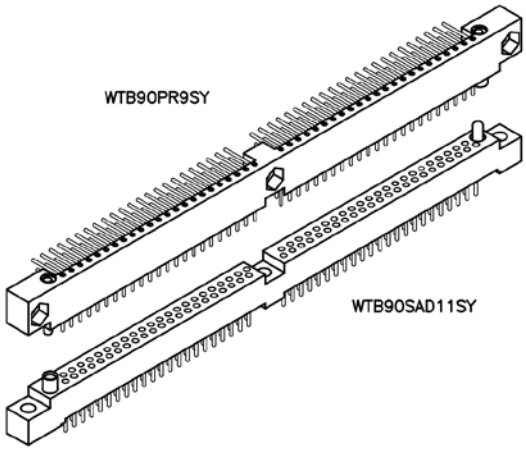

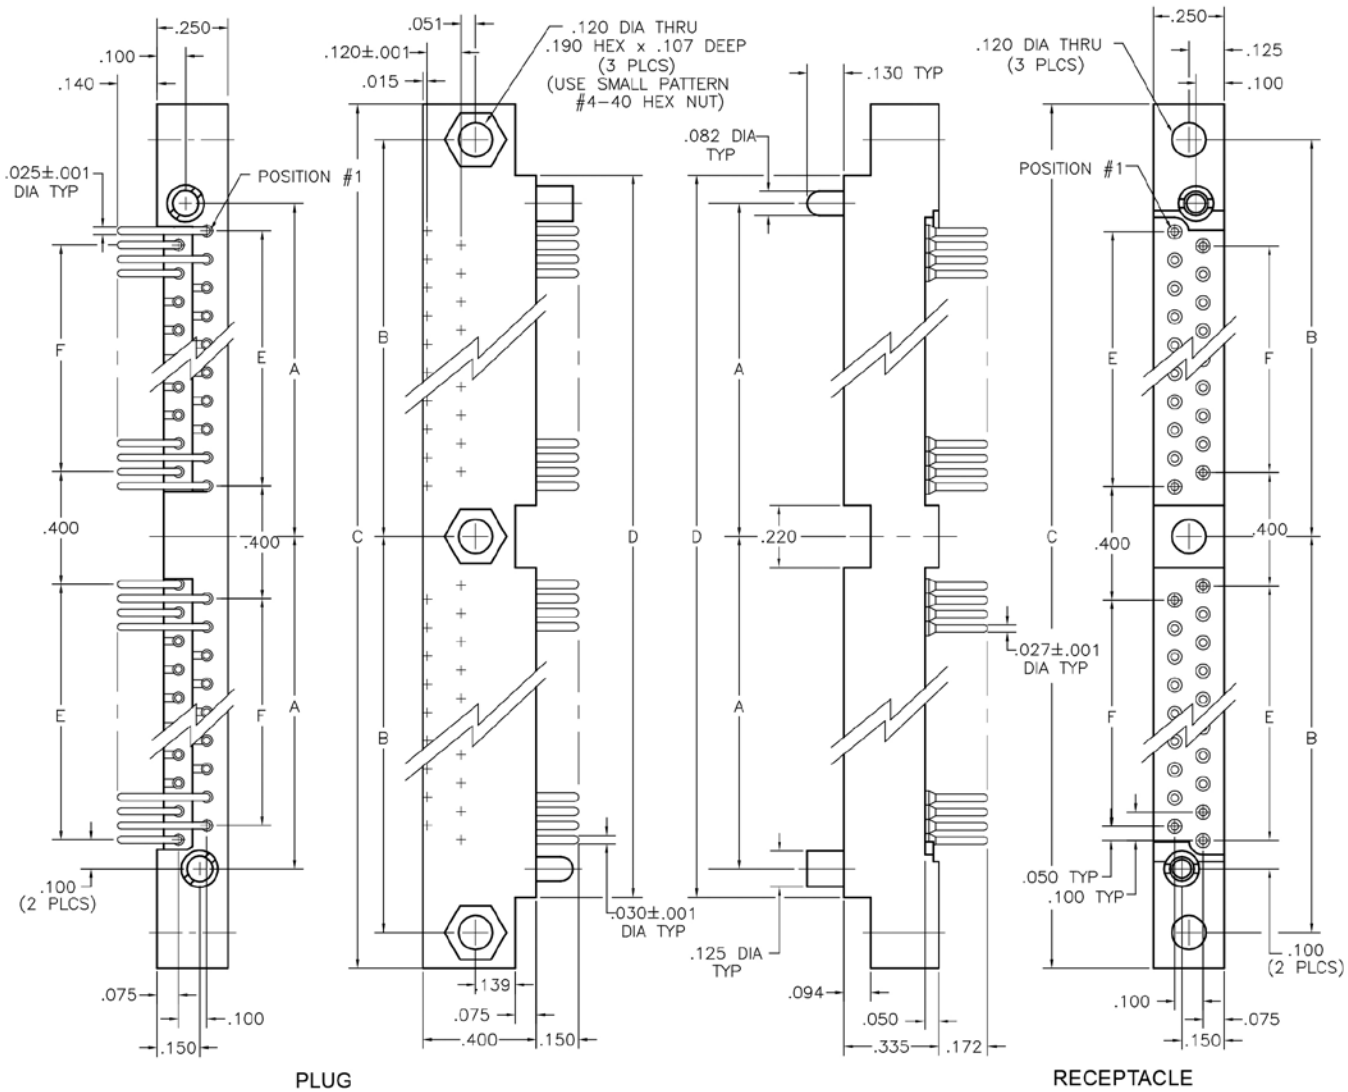

DIMENSIONS						
SIZE	A	B	C	D	E	F
90	2.475	2.700	5.650	5.150	2.200	2.100
100	2.725	2.950	6.150	5.650	2.400	2.400
120	3.225	3.450	7.150	6.650	2.900	2.900

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTB 90 PR9 SY
RECEPTACLE: WTB 90 SAD11 SY
XXXX XX XXXXX XX

PLUG	RECEPTACLE

SERIES

PLUG		RECEPTACLE	
WTB	Plug, right angle, with mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (90, 100, or 120)	XX	Number of contacts (90, 100, or 120)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image. See page W-24 to switch the image.

PLUG	TYPE CONTACTS/TERMINATIONS:
PRC	Pin, right angle, solder cup (.035" I.D.)
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PRW33	Pin, right angle, wire wrap®, .515"
PRW40	Pin, right angle, wire wrap®, .625"

RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTB90PR9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

PLUG	
SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Turning jackset, .435"
JTL	Turning jackset, long, .635"


RECEPTACLE	
SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS


- Option Codes: Add to the end of the part number. Example: WTB90PR9SY-D01. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-515 Contact position noted by dash number is left open (to mate with -443). For right angle connectors only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-413 Straight pin contacts in right angle plug molding, with solder cup terminals extending .100" beyond molding.

☒ = Option not RoHS compliant




EXAMPLE: WTB90SOR9SY–C69

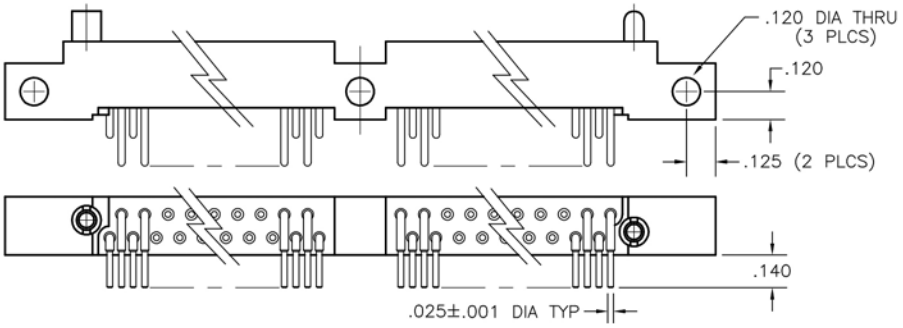


Downloaded from Arrow.com.

TWO ROW – SANDWICH BOARDS

WTBV - WTB
0.100" I 10 THROUGH 70 CONTACTS

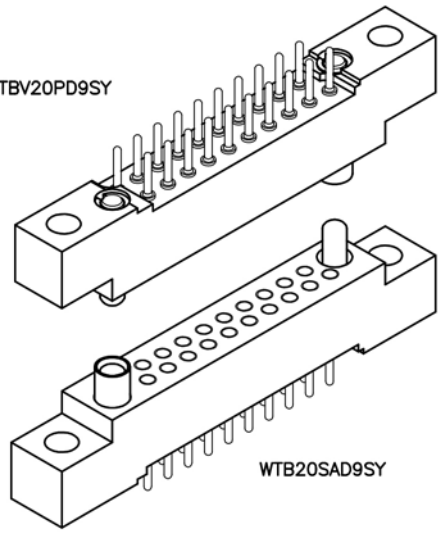

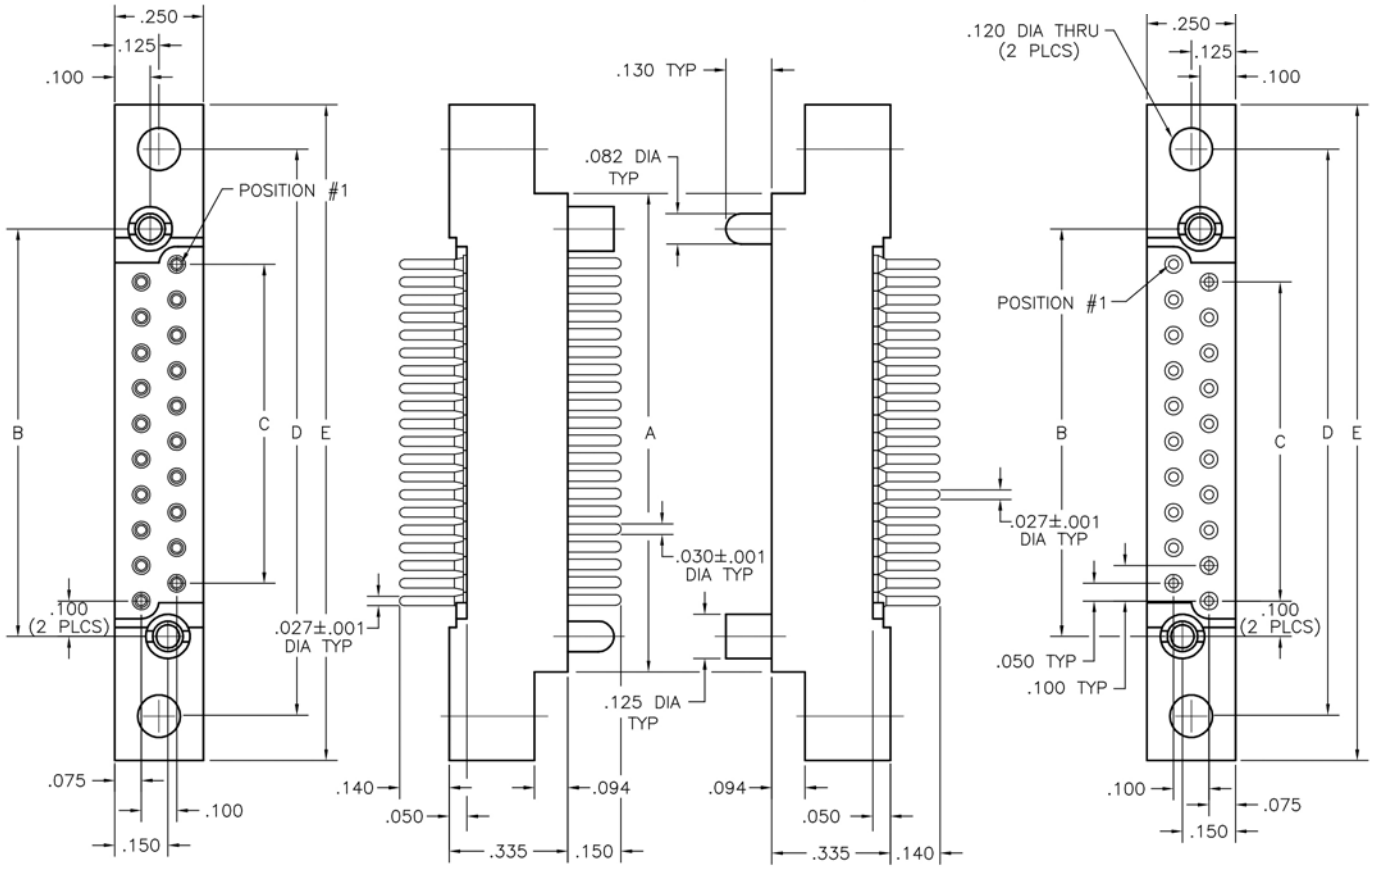

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTBV 20 PD9 SY
RECEPTACLE: WTB 20 SAD9 SY
XXXX XX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WTBV	Plug, straight, with mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia
PF3	Pin, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"
PF8	Pin, straight, flex circuit, .125"
PW34	Pin, straight, wire wrap®, .531"
PW40	Pin, straight, wire wrap®, .625"

	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTBV10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"


SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBV20PD9SY-D01. Call factory for additional codes.

-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

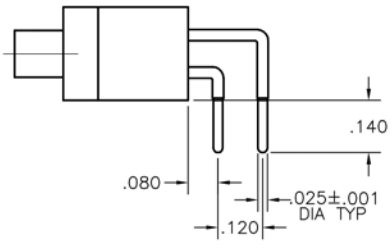



CONTACT OPTION: SOR9

Downloaded from Arrow.com.

TWO ROW – SANDWICH BOARDS

WTBV - WTB
0.100" I 90 THROUGH 100 CONTACTS

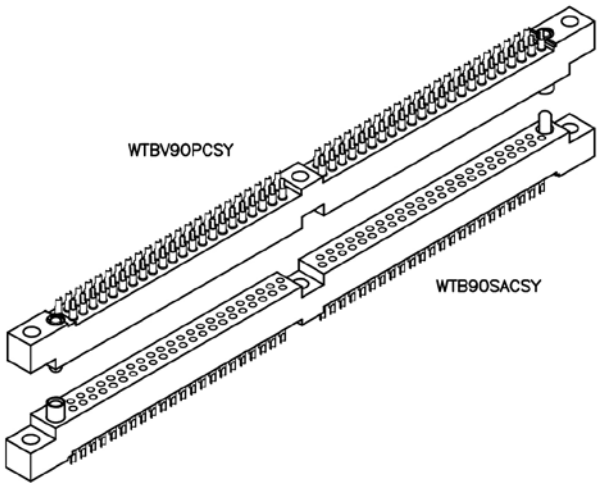

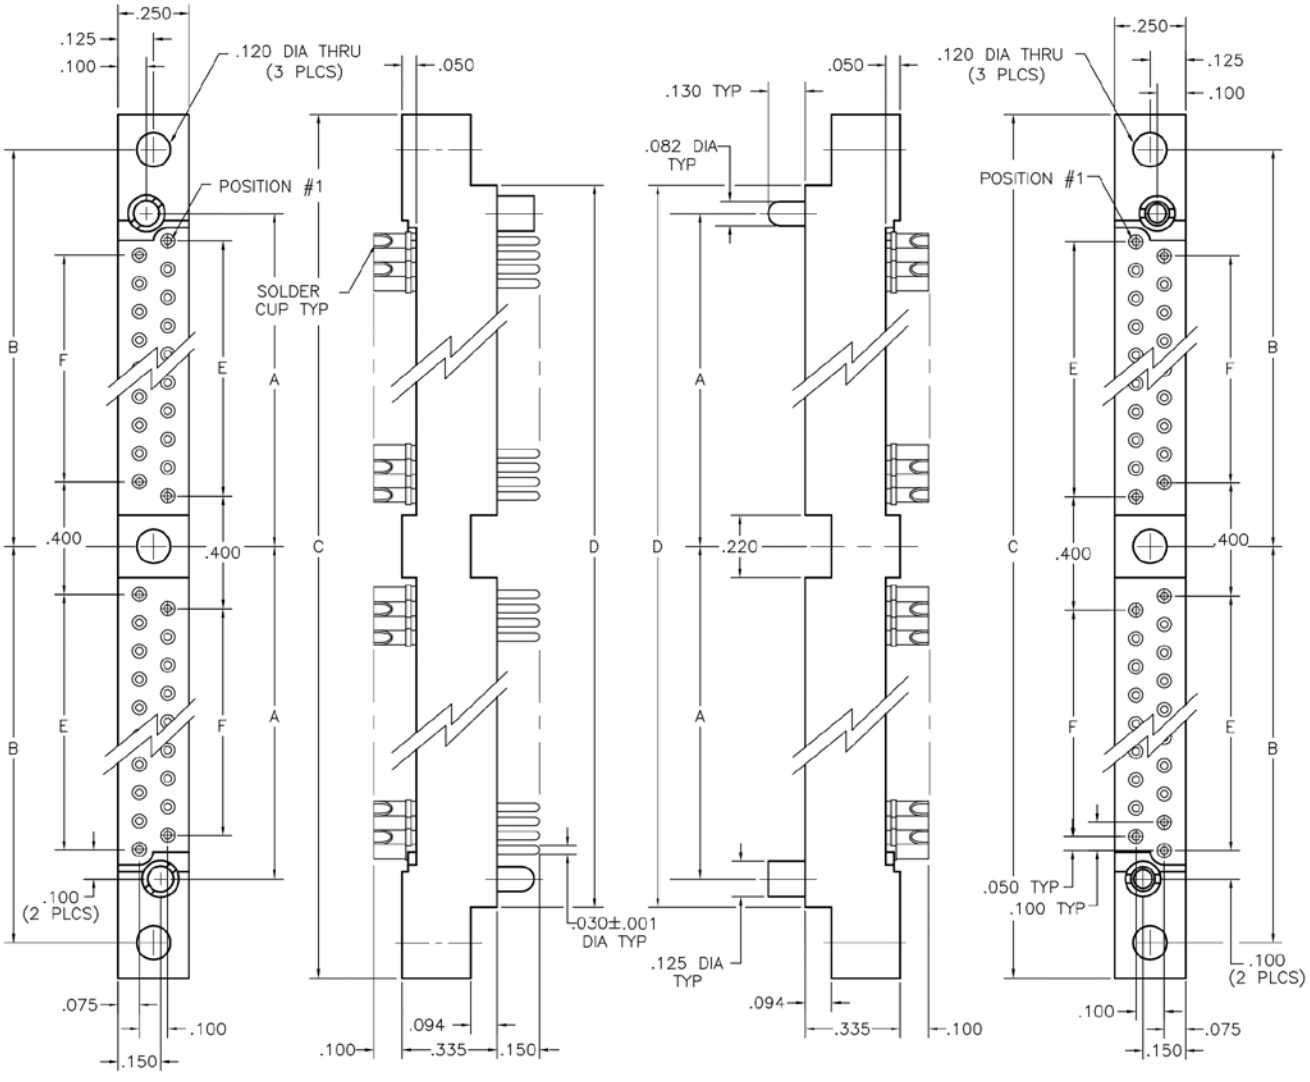

DIMENSIONS						
SIZE	A	B	C	D	E	F
90	2.475	2.700	5.650	5.150	2.200	2.100
100	2.725	2.950	6.150	5.650	2.400	2.400

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WTBV	90	PC SY
RECEPTACLE:	WTB	90	SAC SY
	XXXX	XX	XXX XX

SERIES

PLUG		RECEPTACLE	
WTBV	Plug, straight, with mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (90 or 100)	XX	Number of contacts (90 or 100)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

PLUG	TYPE CONTACTS/TERMINATIONS:	RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia	SAF3	Socket, straight, flex circuit, .050"
PF3	Pin, straight, flex circuit, .050"	SAF6	Socket, straight, flex circuit, .093"
PF6	Pin, straight, flex circuit, .093"	SAF9	Socket, straight, flex circuit, .140"
PF8	Pin, straight, flex circuit, .125"	SAG7	Socket, straight, dip solder, .109" x .018" dia
PW34	Pin, straight, wire wrap®, .531"	SAG9	Socket, straight, dip solder, .140" x .018" dia
PW40	Pin, straight, wire wrap®, .625"	SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTBV90PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
JT	Turning jackset, .500"	J	Fixed jackset
JTA	Turning jackset, .200"	JL	Fixed jackset, long
JTB	Hex turning jackset, .200"		
JTC	Hex turning jackset, .500"		
JTL	Turning jackset, long, .700"		

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBV100PD9SY-D01. Call factory for additional codes.


-B82	Termination face sealed against conformal coating
-342	Remove mounting ears (.250" each end)
-D01	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

TWO ROW – CABLE-TO-BOARD OR PC CARD

WTA - WTB
0.100" I 10 THROUGH 70 CONTACTS

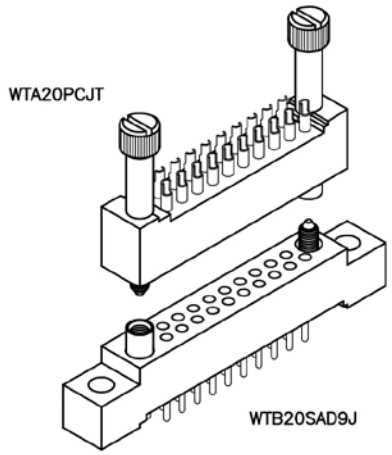

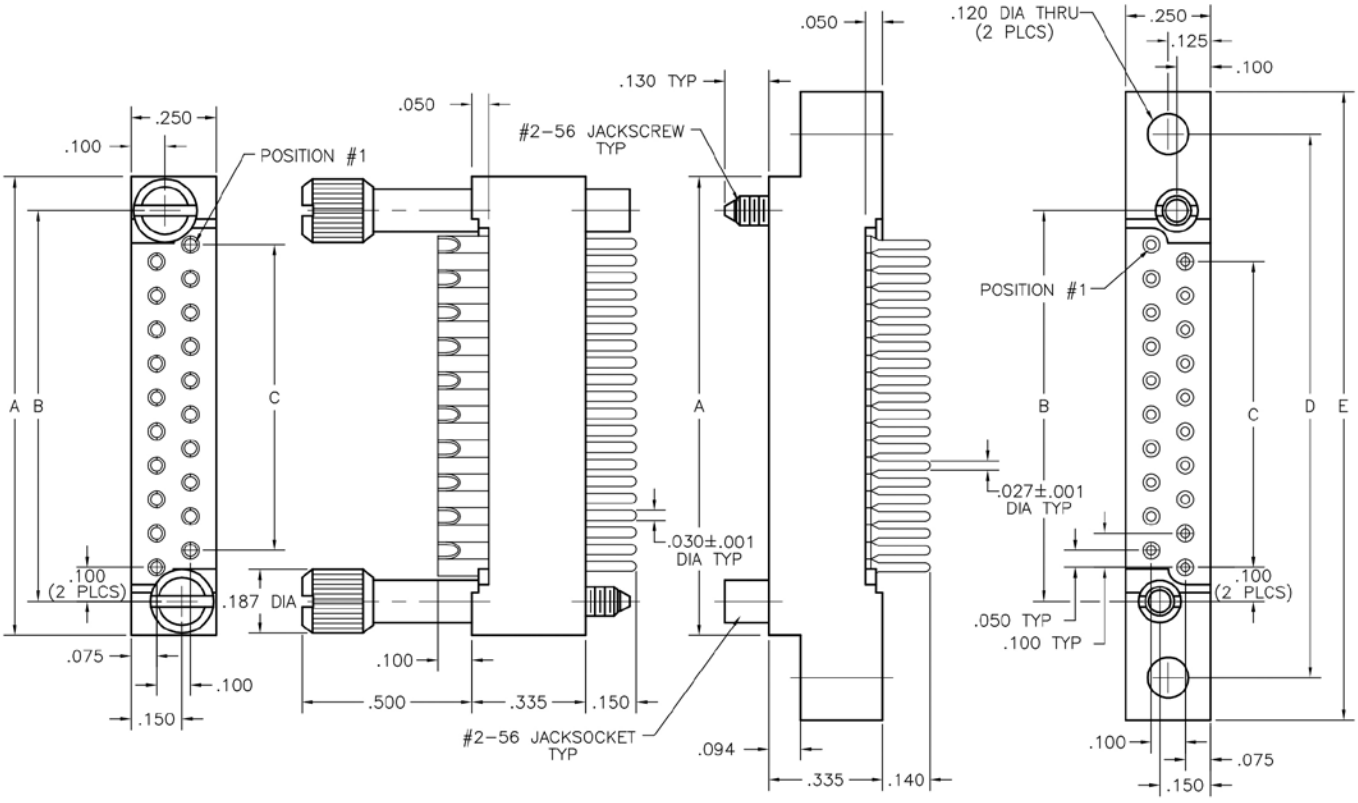

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WTA	20	PC	JT
RECEPTACLE:	WTB	20	SAD9	J
	XXX	XX	XXXX	XX

SERIES

PLUG		RECEPTACLE	
WTA	Plug, straight, without mounting ears	WTB	Receptacle, straight, with mounting ears
		WTB	Receptacle, right angle, with mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- WTA connectors - jackset hardware determines the image. Must specify image with guide set hardware. See page W-17.
- WTB connectors - contacts determine the image. Right angle pin contacts are always plug image, and straight pin or sockets are receptacle image.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

PLUG TYPE CONTACTS/TERMINATIONS:		RECEPTACLE TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia	SAF3	Socket, straight, flex circuit, .050"
PF3	Pin, straight, flex circuit, .050"	SAF6	Socket, straight, flex circuit, .093"
PF6	Pin, straight, flex circuit, .093"	SAF9	Socket, straight, flex circuit, .140"
PF8	Pin, straight, flex circuit, .125"	SAG7	Socket, straight, dip solder, .109" x .018" dia
PW34	Pin, straight, wire wrap®, .531"	SAG9	Socket, straight, dip solder, .140" x .018" dia
PW40	Pin, straight, wire wrap®, .625"	SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination, .150" (connector saver)
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTA10PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

JT	Turning jackset, .500"	J	Fixed jackset
JTA	Turning jackset, .200"	JL	Fixed jackset, long
JTB	Hex turning jackset, .200"		
JTC	Hex turning jackset, .500"		
JTL	Turning jackset, long, .700"		

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTA10SAD9J-D01. Call factory for additional codes.


-B82	Termination face sealed against conformal coating
-342	Remove mounting ears (.250" each end)
-D01	Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39	Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54	Combine -B82 & -D01 options
-G69	Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-BOARD OR PC CARD

WTB - WTAX
0.100" I 10 THROUGH 70 CONTACTS

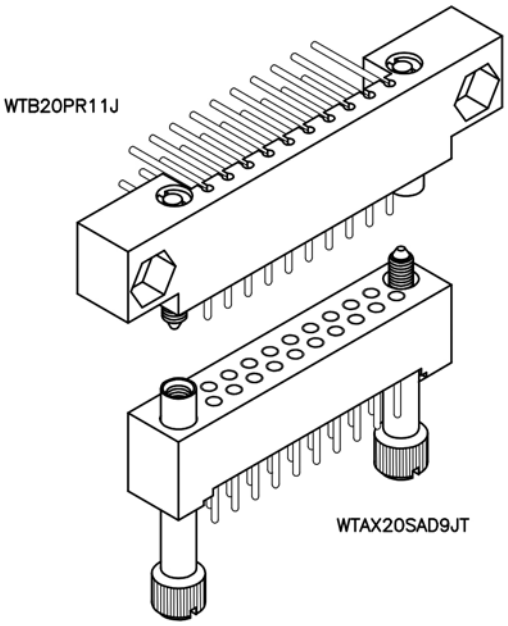

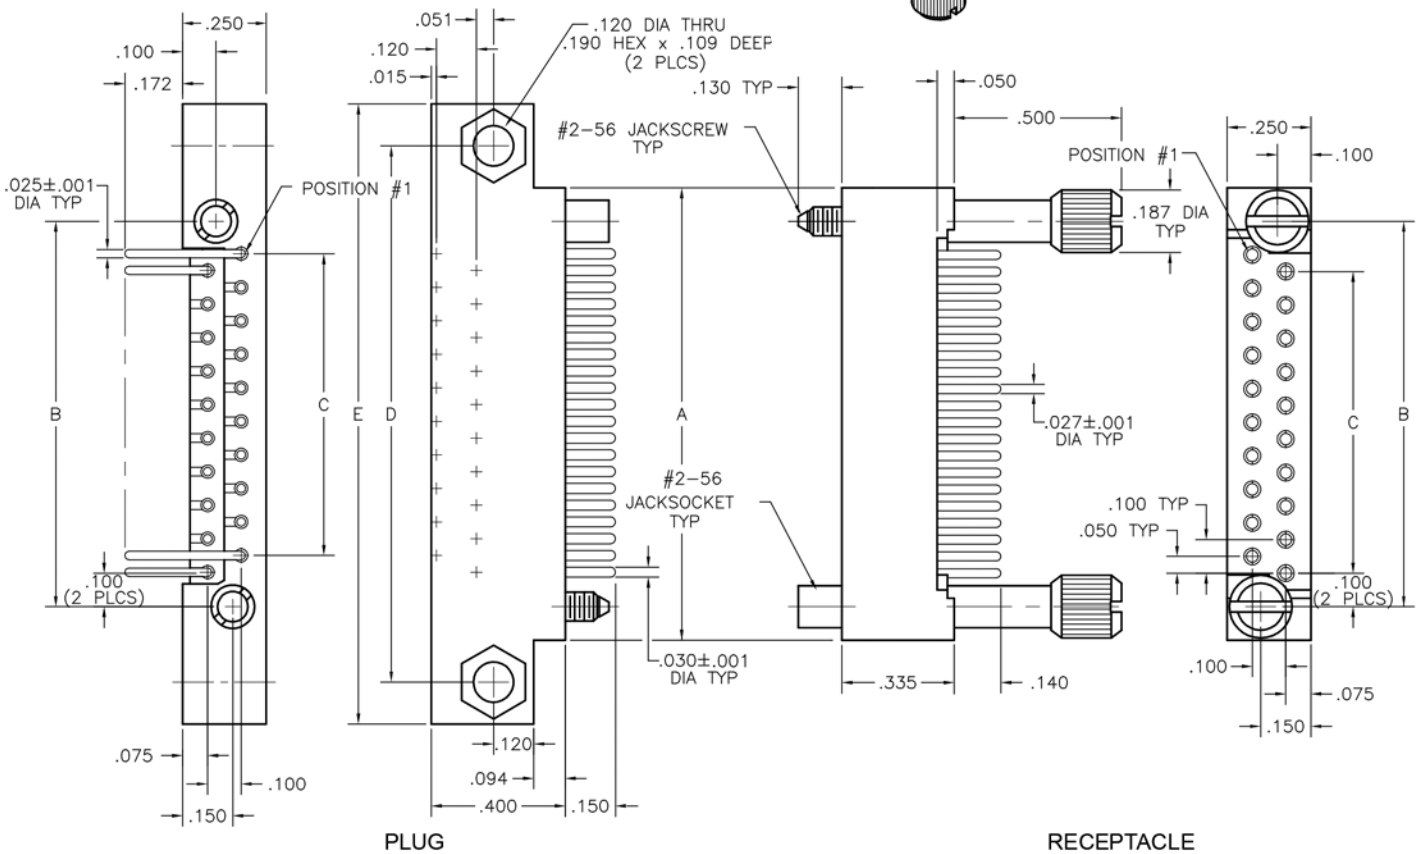

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WTB	20	PR11	J
RECEPTACLE:	WTAX	20	SAD9	JT
	XXXX	XX	XXXX	XX

SERIES

PLUG		RECEPTACLE	
WTB	Plug, right angle, with mounting ears	WTAX	Receptacle, straight, without mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

PLUG TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PRC	Pin, right angle, solder cup (.035" I.D.)
PRW33	Pin, right angle, wire wrap®, .515"
PRW40	Pin, right angle, wire wrap®, .625"

RECEPTACLE TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAD15	Socket, straight, dip solder, .234" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination, .150" (connector saver)
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WTB20PR11QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

PLUG	
SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

RECEPTACLE	
SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
SYL-#	Guide set, long, polarized
J	Fixed jackset
JL	Fixed jackset, long
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTB10SAD9J-D01. Call factory for additional codes.


-342 Remove mounting ears (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-B82 Termination face sealed against conformal coating. Receptacle connector only.


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-CHASSIS

WTB - WTKA
0.100" I 10 THROUGH 70 CONTACTS

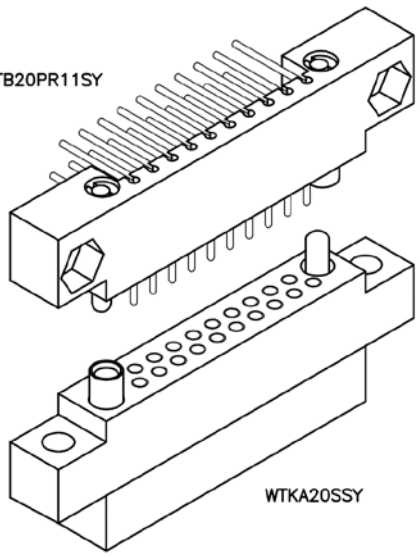

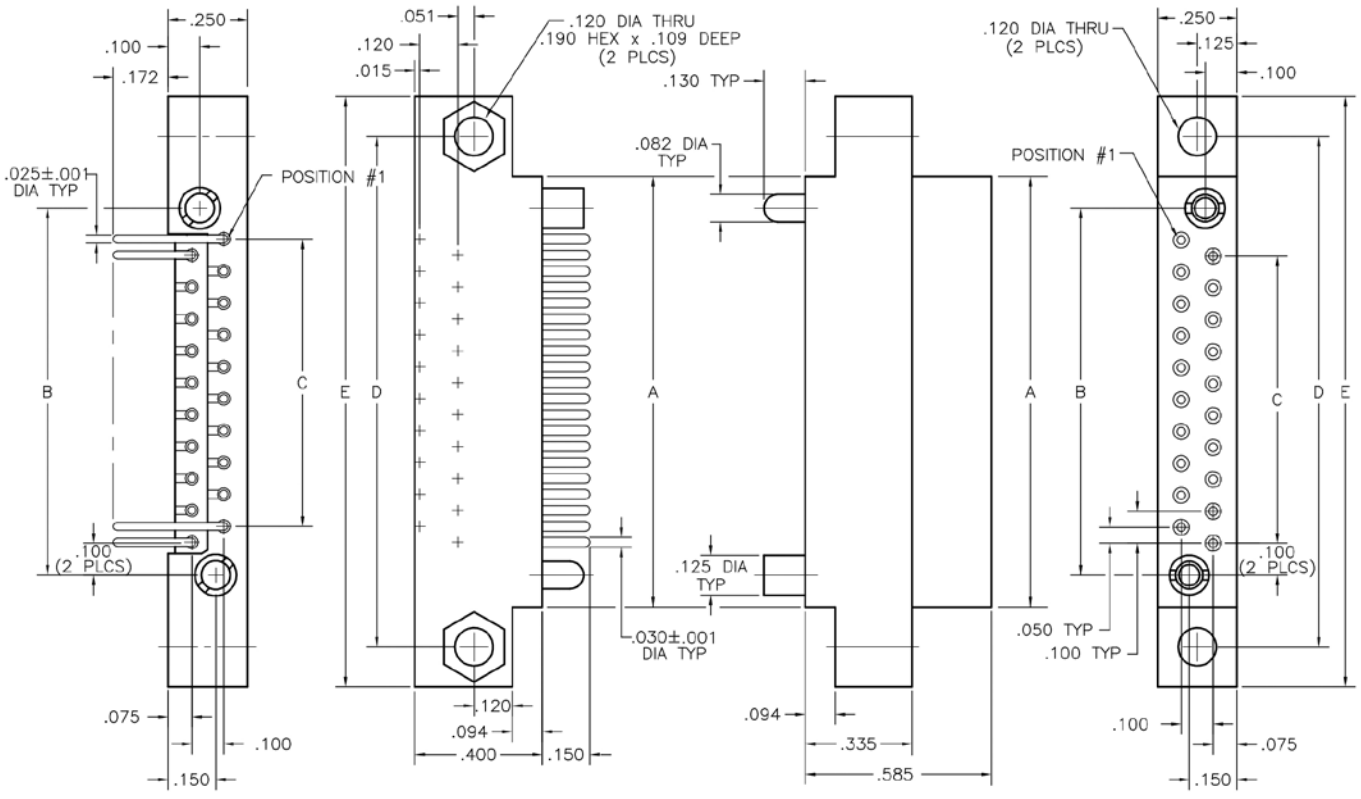

PLUG RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTB 20 PR11 SY
RECEPTACLE: WTKA 20 S SY
XXXX XX XXXX XX

PLUG		RECEPTACLE	

SERIES

WTB	Plug, right angle, with mounting ears	WTKA	Receptacle, straight, crimp removable, with mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG
PRW40	Pin, right angle, wire wrap®, .625"		


HARDWARE

SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JT	Turning jackset, .500"
JTA	Turning jackset, .135"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .135"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .435"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .635"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.

-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444	Contact position noted by dash number is left open (to mate with -443).
-478	Drill mating side hole diameter designated by dash number.
-515	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548	Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53	Socket, straight, crimp removable, 20 AWG
-C45	Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68	Combine -C45 and -515 special codes.

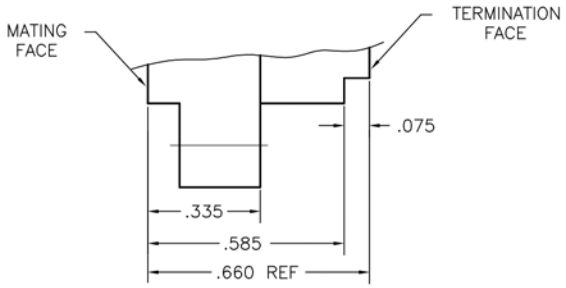



DETAIL A

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-CHASSIS

WTB - WTKA
0.100" I 90 THROUGH 120 CONTACTS

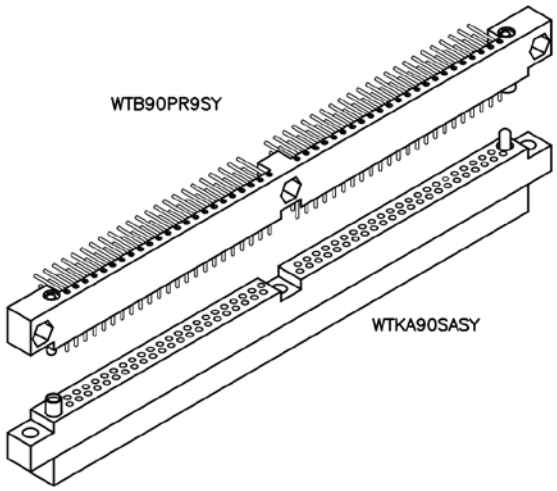

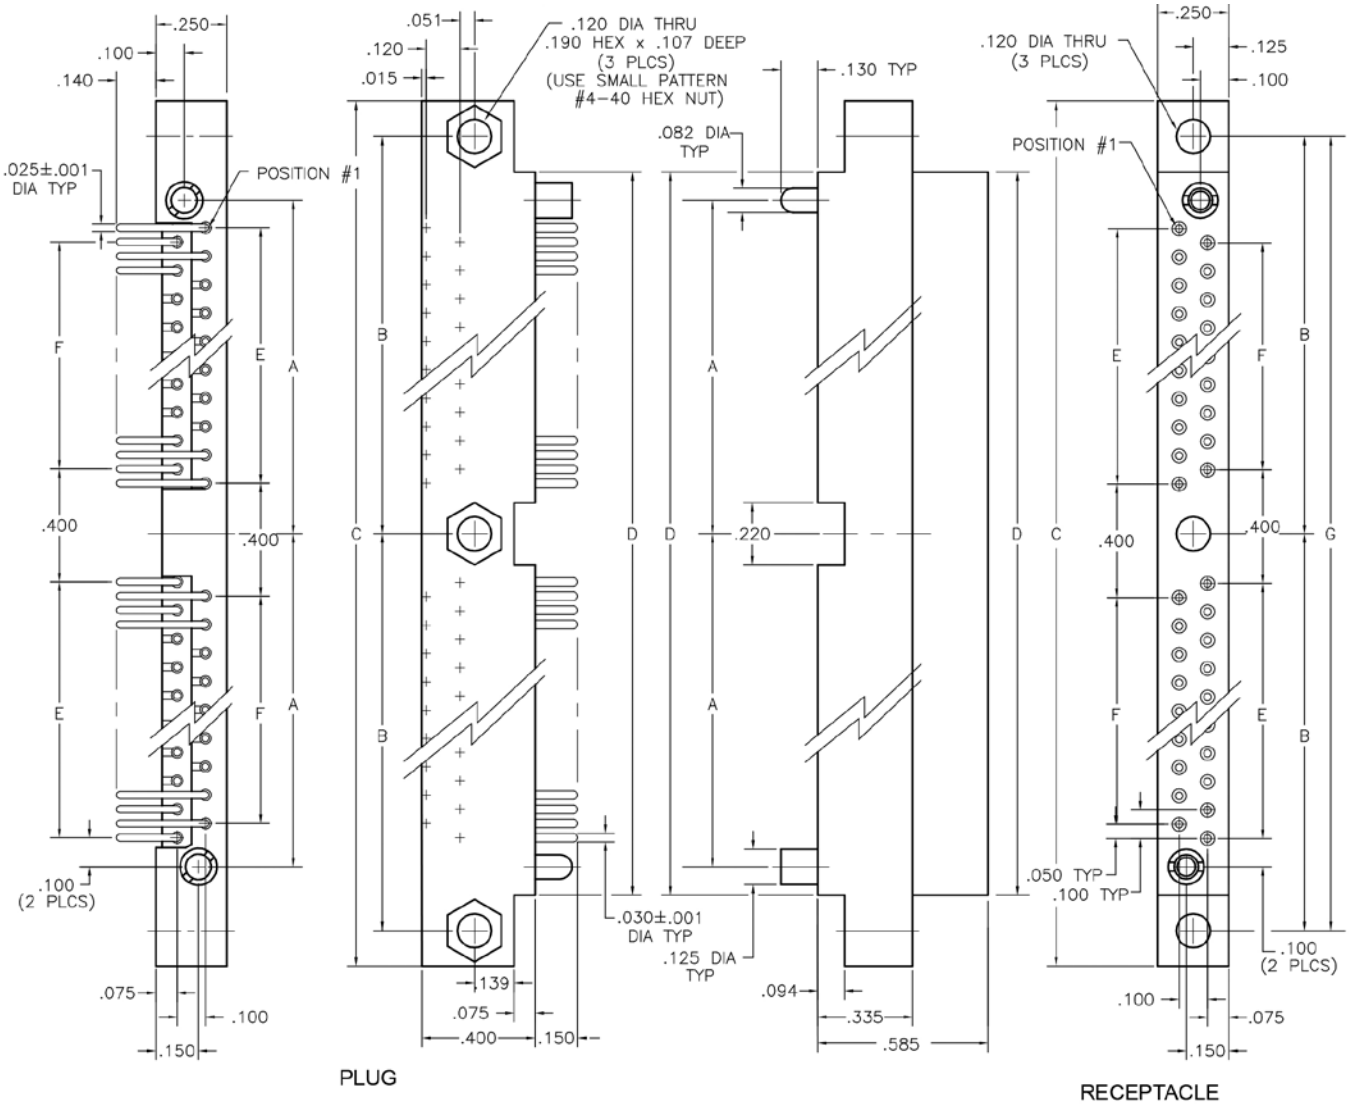

DIMENSIONS							
SIZE	A	B	C	D	E	F	G
90	2.475	2.700	5.650	5.150	2.200	2.100	5.400
120	3.225	3.450	7.150	6.650	2.900	2.900	6.900

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTB 90 PR9 SY
RECEPTACLE: WTKA 90 SA SY
XXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WTB Plug, right angle, with mounting ears	WTKA Receptacle, straight, crimp removable, with mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX Number of contacts (90 or 120)	XX Number of contacts (90 or 120)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:	TYPE CONTACTS/TERMINATIONS:
PR7 Pin, right angle, dip solder, .109" x .025" dia	S Socket, straight, crimp removable, 22 AWG
PR9 Pin, right angle, dip solder, .140" x .025" dia	SA Same as above
PR11 Pin, right angle, dip solder, .172" x .025" dia	P Pin, straight, crimp removable, 22 AWG
PRW40 Pin, right angle, wire wrap®, .625"	


HARDWARE

SY Guide set	SY Guide set
SY-# Guide set, polarized	SY-# Guide set, polarized
J Fixed jackset	J Fixed jackset
JT Turning jackset, .435"	JT Turning jackset, .500"
JTA Turning jackset, .135"	JTA Turning jackset, .200"
JTB Hex turning jackset, .135"	JTB Hex turning jackset, .200"
JTC Hex turning jackset, .435"	JTC Hex turning jackset, .500"
JTL Turning jackset, long, .635"	JTL Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.


-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
-478 Drill mating side hole diameter designated by dash number (crimp only).
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

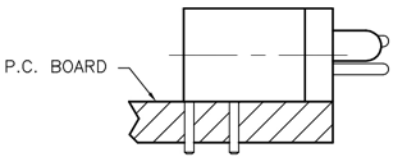


WTB90PR9SY
P.C. BOARD EXAMPLE

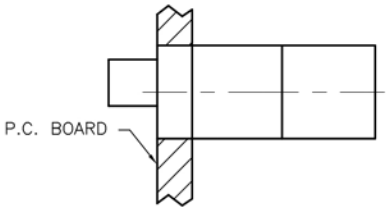

WTKA90SASY
CHASSIS EXAMPLE



WTB90PRW40SY
WIRE WRAP EXAMPLE

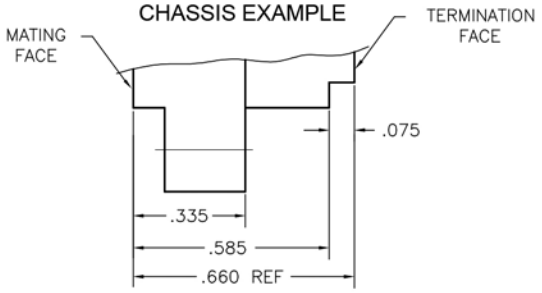



DETAIL A

Downloaded from Arrow.com.

TWO ROW – CHASSIS-TO-CHASSIS

WTKVA - WTKA
0.100" I 10 THROUGH 70 CONTACTS

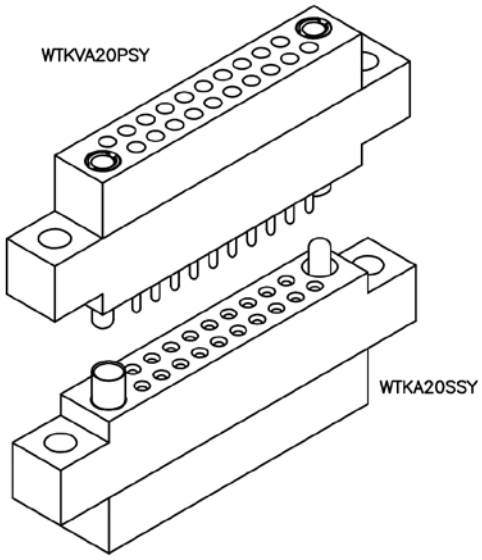

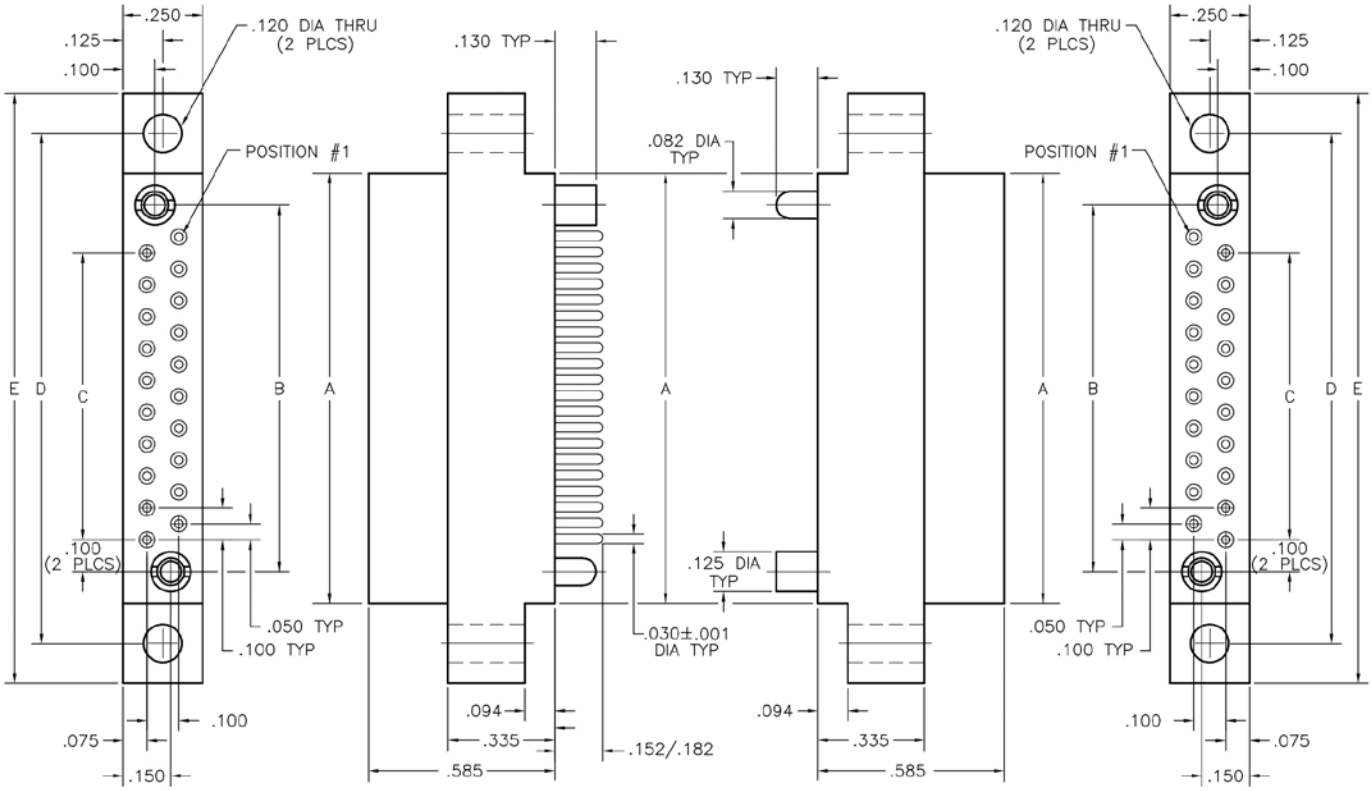

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTKVA 20 P SY
RECEPTACLE: WTKA 20 S SY
XXXX XX XXXX XX

PLUG	RECEPTACLE

SERIES

PLUG	RECEPTACLE
WTKVA Plug, straight, crimp removable, with mounting ears	WTKA Receptacle, straight, crimp removable, with mounting ears

- WTKVA and WTKA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

PLUG	RECEPTACLE
XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp connectors.
- WTKVA** and WTKA includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG	TYPE CONTACTS/TERMINATIONS:	RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight, crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .500"	JT	Turning jackset, .500"
JTA	Turning jackset, .200"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.

-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443).
-478	Drill mating side hole diameter designated by dash number.
-515	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-A53	20 AWG, straight, crimp removable contact, pin or socket.
-C45	Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68	Combine -C45 and -515 special codes.

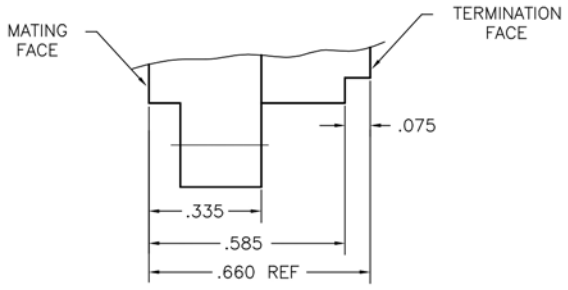



DETAIL A

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-BOARD

WTB - WTDXA
0.100" I 10 THROUGH 70 CONTACTS

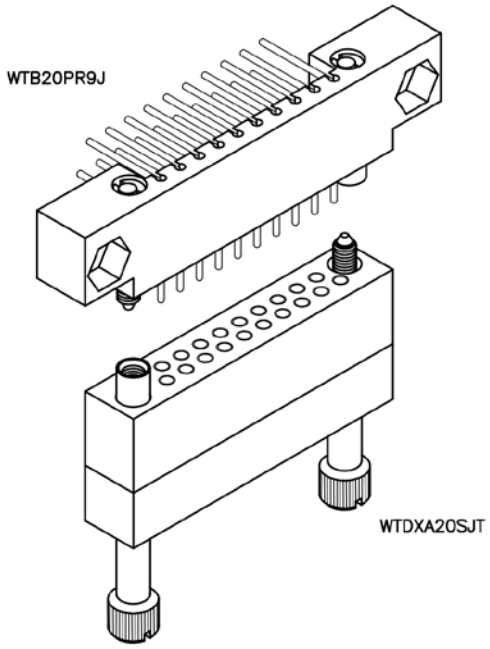

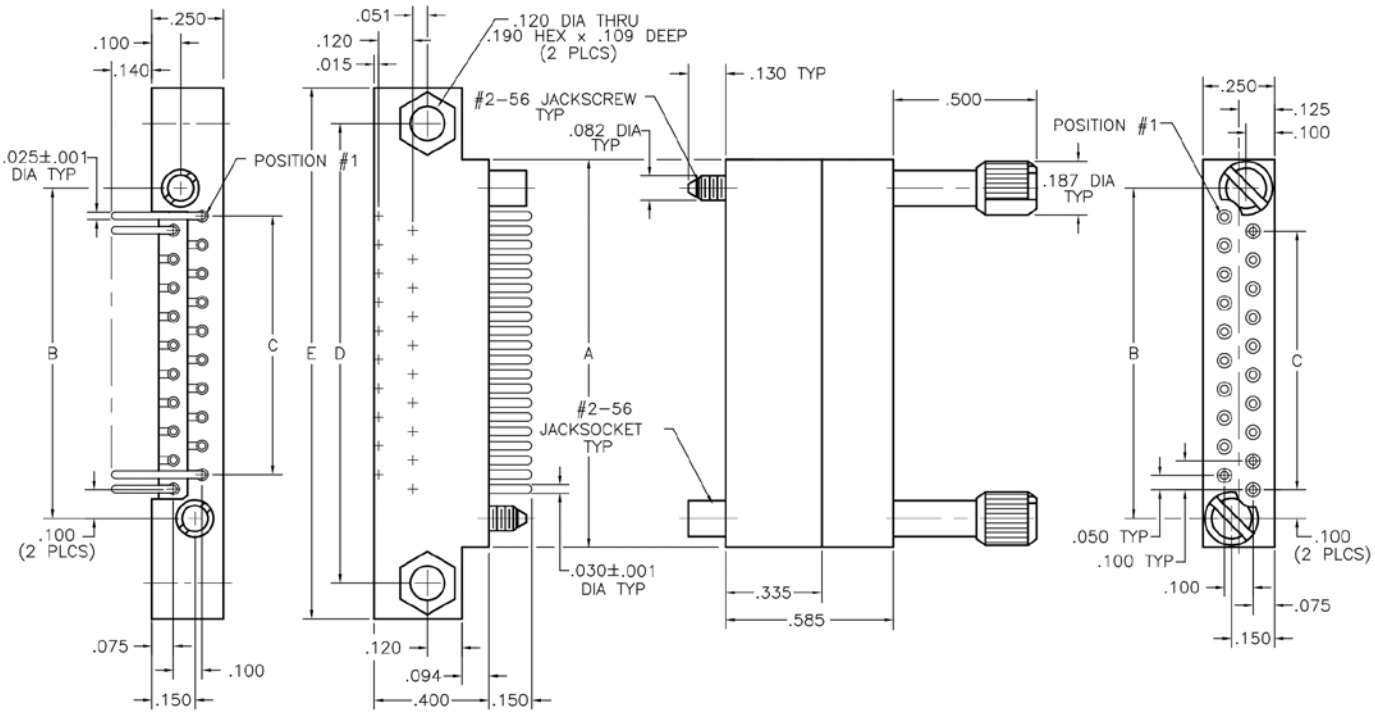

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WTB	20	PR9	J
RECEPTACLE:	WTDXA	20	S	JT
	XXXXX	XX	XXX	XX

PLUG	RECEPTACLE

SERIES

PLUG	RECEPTACLE
WTB Plug, right angle, with mounting ears	WTDXA Receptacle, straight, crimp removable, without mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

PLUG	RECEPTACLE
XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG TYPE CONTACTS/TERMINATIONS:		RECEPTACLE TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG
PRW40	Pin, right angle, wire wrap®, .625"		


HARDWARE

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JT	Turning jackset, .500"
JTA	Turning jackset, .135"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .135"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .435"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .635"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTKA10SSY-C45. Call factory for additional codes.

-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
-478 Drill mating side hole diameter designated by dash number.
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

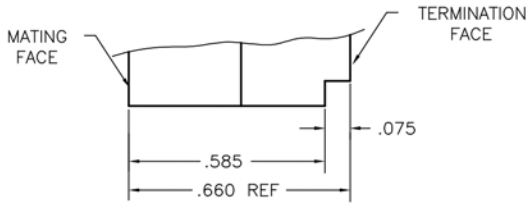



DETAIL A

Downloaded from Arrow.com.

TWO ROW – PC CARD-TO-BOARD

WTB - WTDXA
0.100" I 90 THROUGH 120 CONTACTS

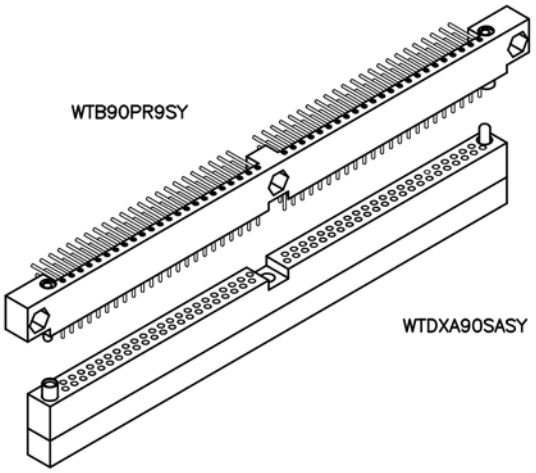

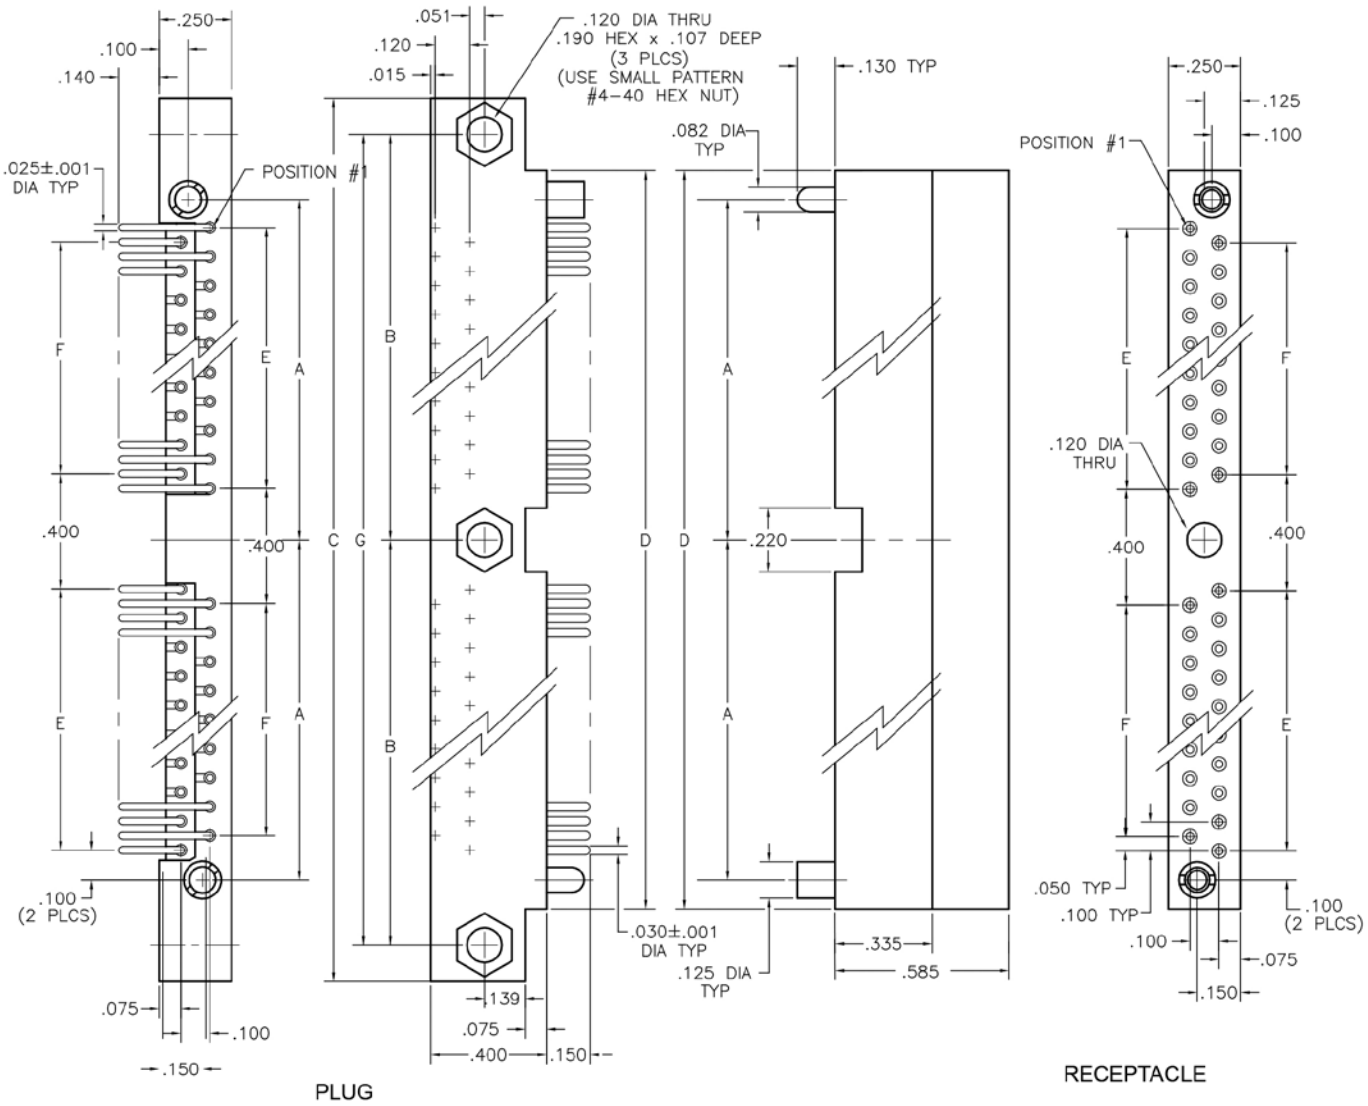

DIMENSIONS							
SIZE	A	B	C	D	E	F	G
90	2.475	2.700	5.560	5.150	2.200	2.100	5.400
120	3.225	3.450	7.150	6.650	2.900	2.900	6.900

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTB 90 PR9 SY
RECEPTACLE: WTDXA 90 SA SY
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WTB Plug, right angle, with mounting ears	WTDXA Receptacle, straight, crimp removable, without mounting ears

- WTKA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

XX Number of contacts (90 or 120)	XX Number of contacts (90 or 120)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WTKA** includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PRW40	Pin, right angle, wire wrap®, .625"

TYPE CONTACTS/TERMINATIONS:	
S	Socket, straight, crimp removable, 22 AWG
SA	Same as above
P	Pin, straight, crimp removable, 22 AWG

HARDWARE


SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"

SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .500"
JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WTDXA90SSY-C45. Call factory for additional codes.


-443 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-444 Contact position noted by dash number is left open (to mate with -443). Right angle only.
-478 Drill mating side hole diameter designated by dash number (crimp only).
-515 Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section. Receptacle connector only.
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68 Combine -C45 and -515 special codes.

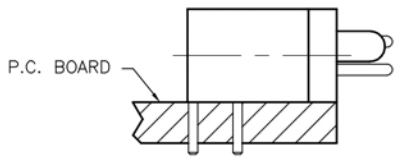


WTB90PR9SY
P.C. BOARD EXAMPLE

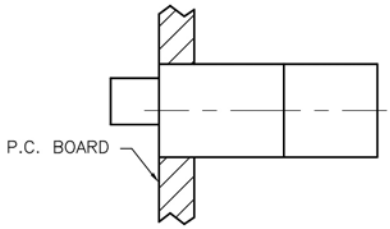

WTDXA90SASY
CHASSIS EXAMPLE



WTB90PRW40SY
WIRE WRAP EXAMPLE

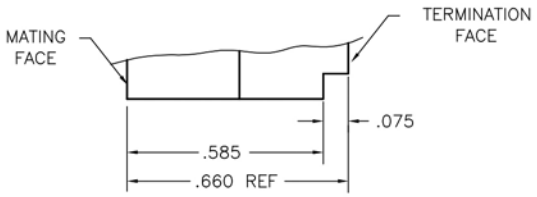



DETAIL A

Downloaded from Arrow.com.

TWO ROW – CHASSIS-TO-CHASSIS

WTDVA - WTDXA
0.100" I 10 THROUGH 70 CONTACTS

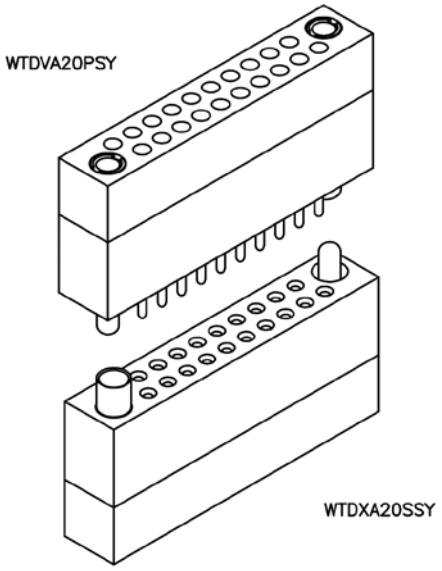

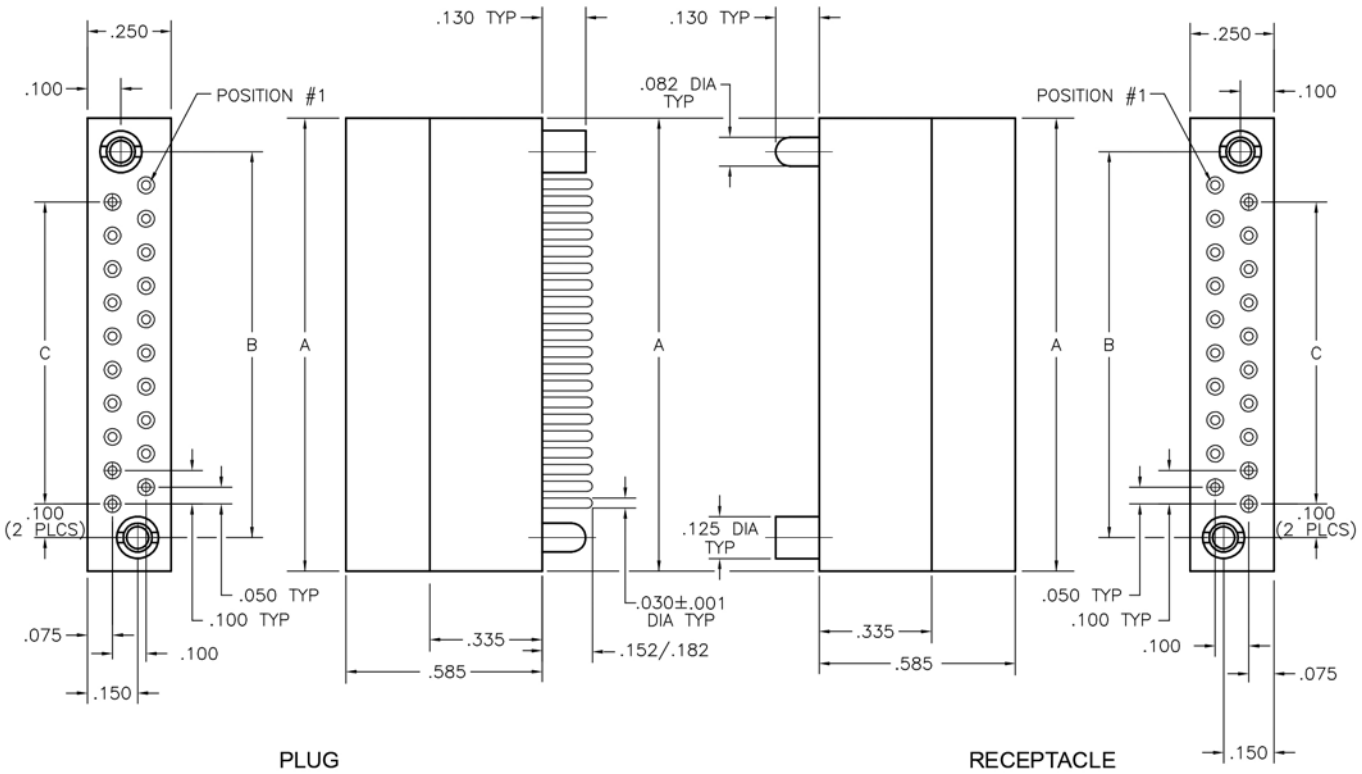

DIMENSIONS							
SIZE	A	B	C	SIZE	A	B	C
10	.850	.650	.400	44	2.550	2.350	2.100
14	1.050	.850	.600	50	2.850	2.650	2.400
20	1.350	1.150	.900	54	3.050	2.850	2.600
24	1.550	1.350	1.100	56	3.150	2.950	2.700
26	1.650	1.450	1.200	60	3.350	3.150	2.900
30	1.850	1.650	1.400	66	3.650	3.450	3.200
36	2.150	1.950	1.700	70	3.850	3.650	3.400
40	2.350	2.150	1.900				

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTDVA 20 P SY
RECEPTACLE: WTDXA 20 S SY
XXXX XX XXXX XX

PLUG	RECEPTACLE

SERIES

PLUG	RECEPTACLE
WTDVA Plug, straight, crimp removable, without mounting ears	WTDXA Receptacle, straight, crimp removable, without mounting ears

- WTDVA and WTDXA connectors will mate with WTA, WTAV, WTB, WTBV connectors. "A" means contacts are included.

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)	XX	Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

- The use of gaskets is not recommended with crimp connectors.
- WTDVA** and WTDXA includes full compliment of WTK2222 (Socket or Pin) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG	TYPE CONTACTS/TERMINATIONS:	RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight, crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .500"	JT	Turning jackset, .500"
JTA	Turning jackset, .200"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTDXA10SSY-C45. Call factory for additional codes.

-443	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-444	Contact position noted by dash number is left open (to mate with -443).
-478	Drill mating side hole diameter designated by dash number.
-515	Polarizing pin installed in contact position noted by dash number. See "Polarization" in Accessories section.
-A53	20 AWG, straight, crimp removable contact, pin or socket.
-C45	Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.
-F68	Combine -C45 and -515 special codes.

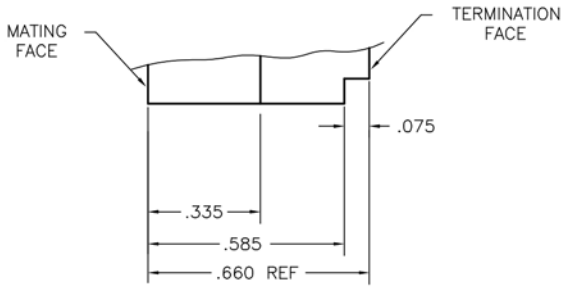


DETAIL A


Downloaded from Arrow.com.

TWO ROW – EXTENDER BOARD CONNECTOR

WTBT

0.100" I 10 THROUGH 70 CONTACTS

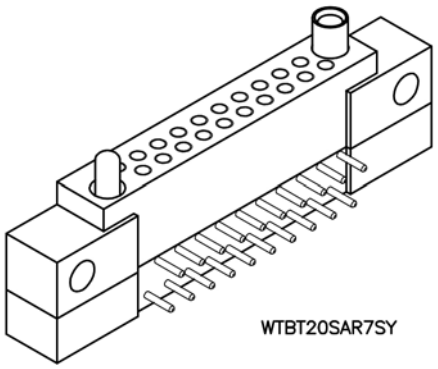

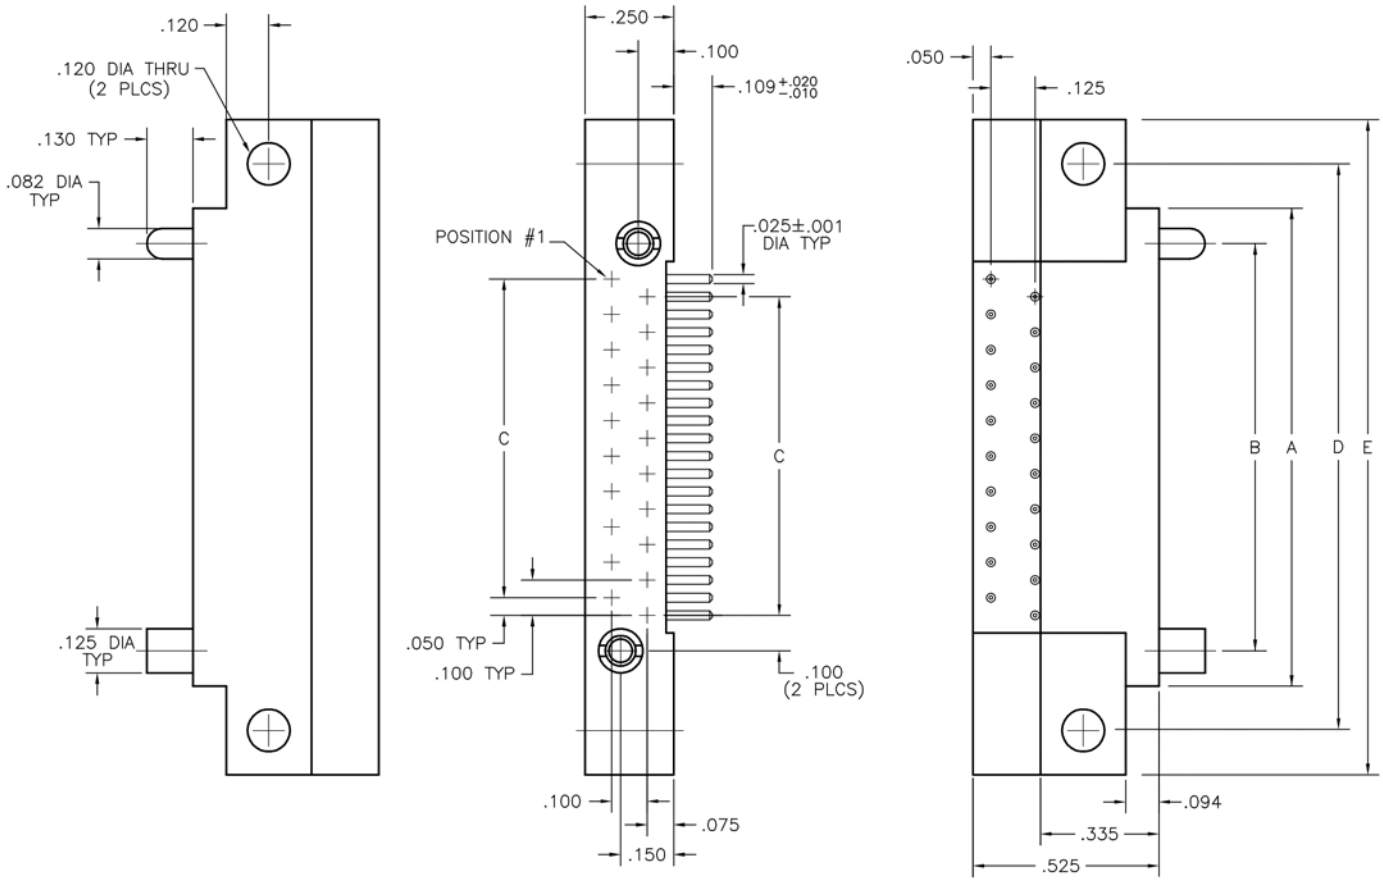

RECEPTACLE

DIMENSIONS											
SIZE	A	B	C	D	E	SIZE	A	B	C	D	E
10	.850	.650	.400	1.100	1.350	44	2.550	2.350	2.100	2.800	3.050
14	1.050	.850	.600	1.300	1.550	50	2.850	2.650	2.400	3.100	3.350
20	1.350	1.150	.900	1.600	1.850	54	3.050	2.850	2.600	3.300	3.550
24	1.550	1.350	1.100	1.800	2.050	56	3.150	2.950	2.700	3.400	3.650
26	1.650	1.450	1.200	1.900	2.150	60	3.350	3.150	2.900	3.600	3.850
30	1.850	1.650	1.400	2.100	2.350	66	3.650	3.450	3.200	3.900	4.150
36	2.150	1.950	1.700	2.400	2.650	70	3.850	3.650	3.400	4.100	4.350
40	2.350	2.150	1.900	2.600	2.850						

* = FOR TEST APPLICATIONS

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

RECEPTACLE: WTBT 20 SAR7 SY
XXXX XX XXXX XX

RECEPTACLE

SERIES

WTBT Receptacle, right angle, with mounting ears

SIZE

XX Number of contacts (10, 14, 20, 24, 26, 30, 36, 40, 44, 50, 54, 56, 60, 66, or 70)

CONTACTS

TYPE CONTACTS/TERMINATIONS:

SARC Socket, right angle, solder cup (.035" I.D.)
SAR7 Socket, right angle, dip solder, .109" x .025" dia
SAR9 Socket, right angle, dip solder, .140" x .025" dia
SAR11 Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

SY Guide set
J Fixed jackset
JT Turning jackset, .475"
JTA Turning jackset, .175"
JTB Hex turning jackset, .175"
JTC Hex turning jackset, .475"
JTL Turning jackset, long, .675"


- WTBT connectors with "J" hardware will mate with: WTA*****JT
  WTA*****JTA
- WTBT connectors with "SY" hardware will mate with: WTB*****SY
  WTAV*****SY
- For polarized "D" shaped guides, add dash and code number to the part number (example: -7).
  See "Polarization" in Accessories section for codes.

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBT10SAR9J-D01. Call factory for additional codes.

-342 Remove mounting ears (.250" each end)
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).


☒ = Option not RoHS compliant

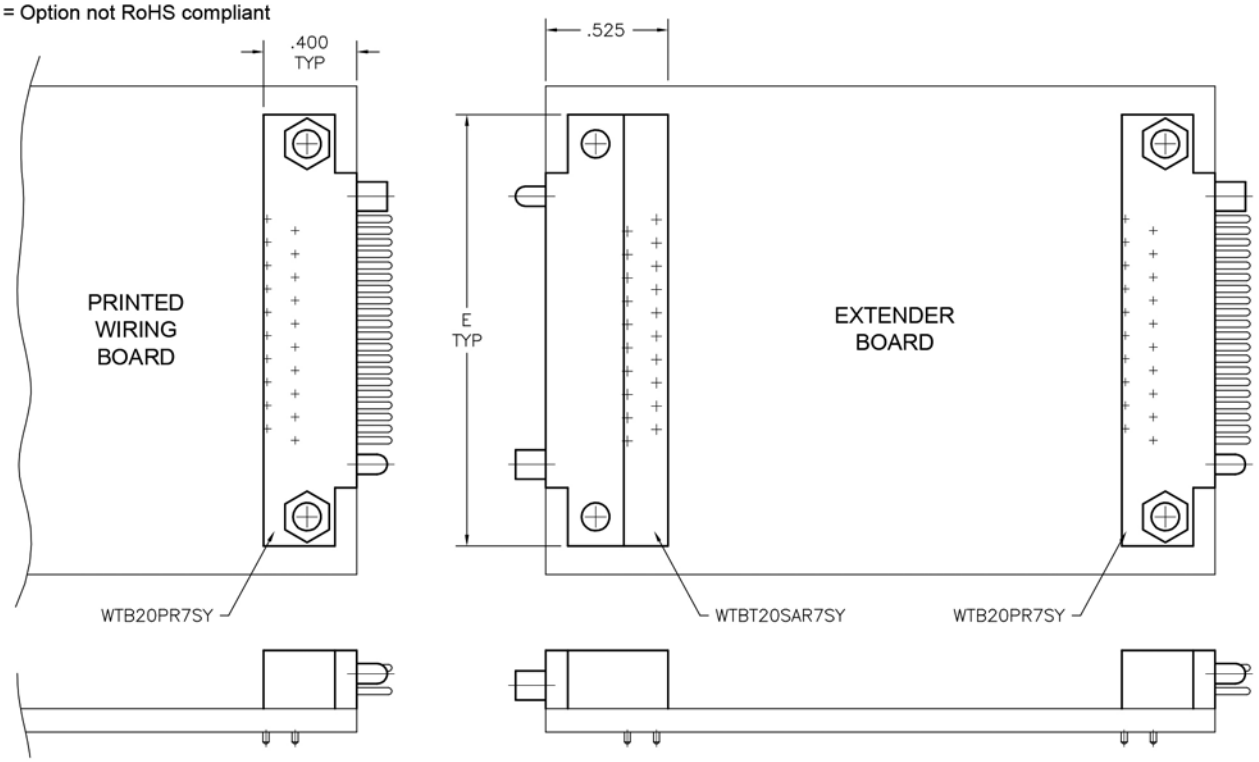


Downloaded from Arrow.com.

TWO ROW – EXTENDER BOARD CONNECTOR

WTBT
0.100" I 100 CONTACTS

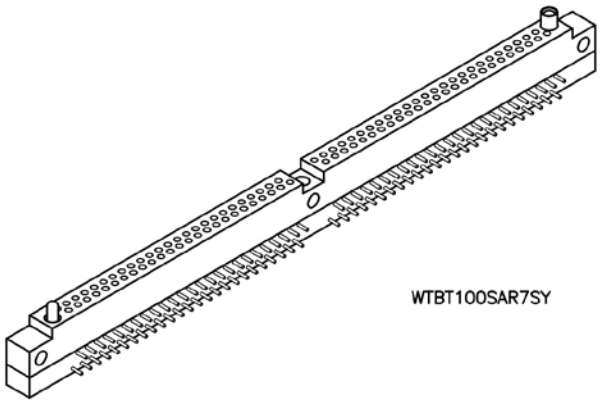

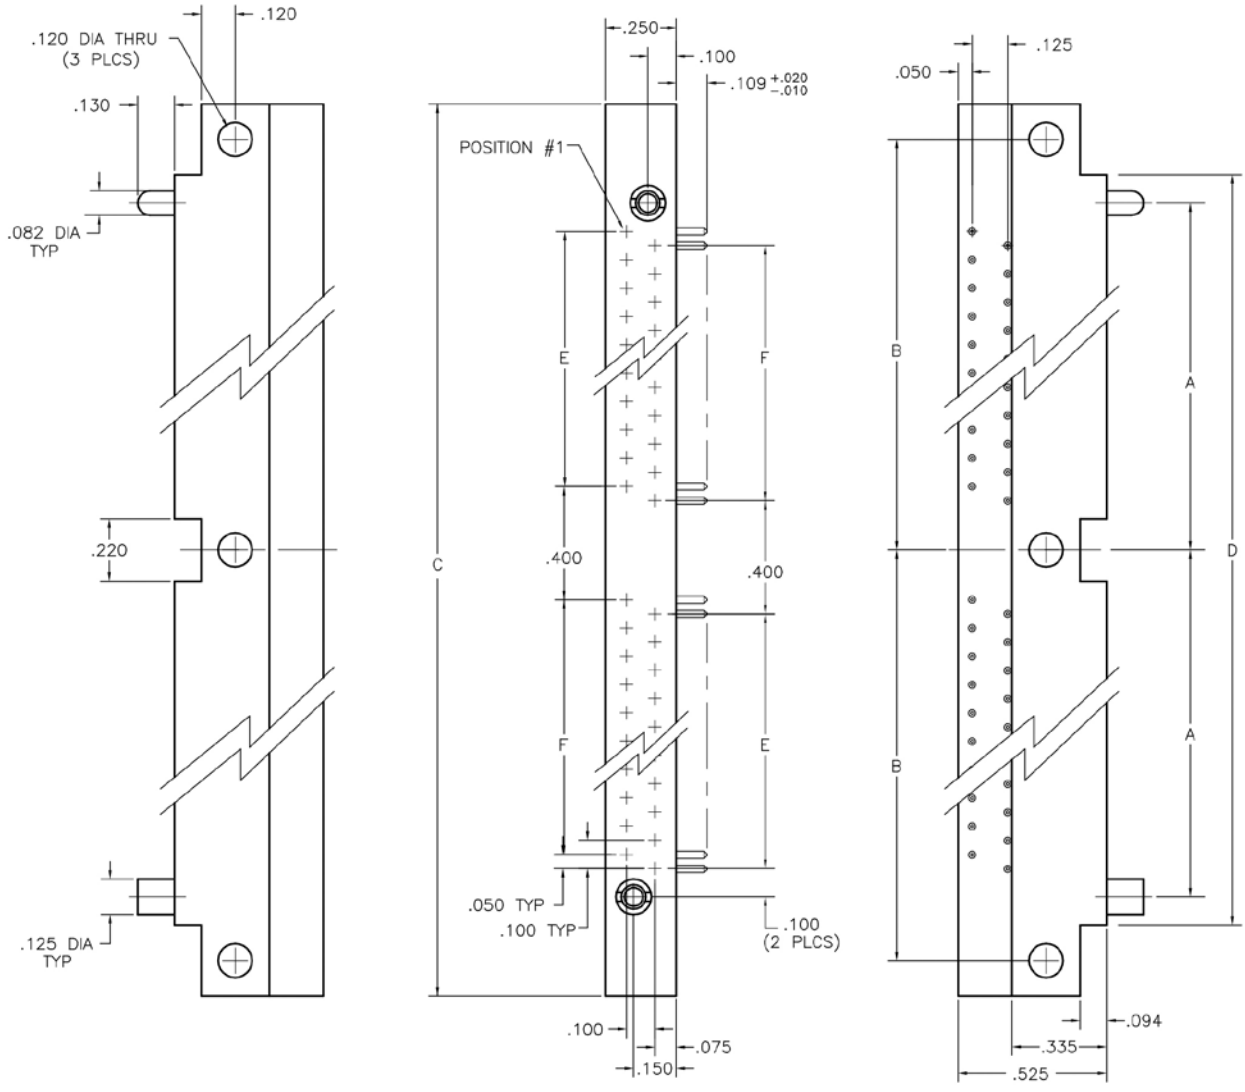

RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
100	2.725	2.950	6.150	5.650	2.400	2.400

* = FOR TEST APPLICATIONS

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

RECEPTACLE: WTBT 100 SAR7 SY
XXXX XXX XXXX XX

RECEPTACLE

SERIES

WTBT Receptacle, right angle, with mounting ears
- WTBT connectors will mate with WTA, WTAV, WTB, WTBV.

SIZE

XXX Number of contacts (100)

CONTACTS

TYPE CONTACTS/TERMINATIONS:

SAR7	Socket, right angle, dip solder, .109" x .025" dia
SAR9	Socket, right angle, dip solder, .140" x .025" dia
SAR11	Socket, right angle, dip solder, .172" x .025" dia
SARC	Socket, right angle, solder cup (.035" I.D.)

HARDWARE


SY	Guide set
SY-#	Guide set, polarized
J	Fixed jackset
JT	Turning jackset, .475"
JTA	Turning jackset, .175"
JTB	Hex turning jackset, .175"
JTC	Hex turning jackset, .475"
JTL	Long turning jackset, .675"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WTBT100SAR7SY342. Call factory for additional codes.

-342 Remove mounting ears (.250" each end)
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

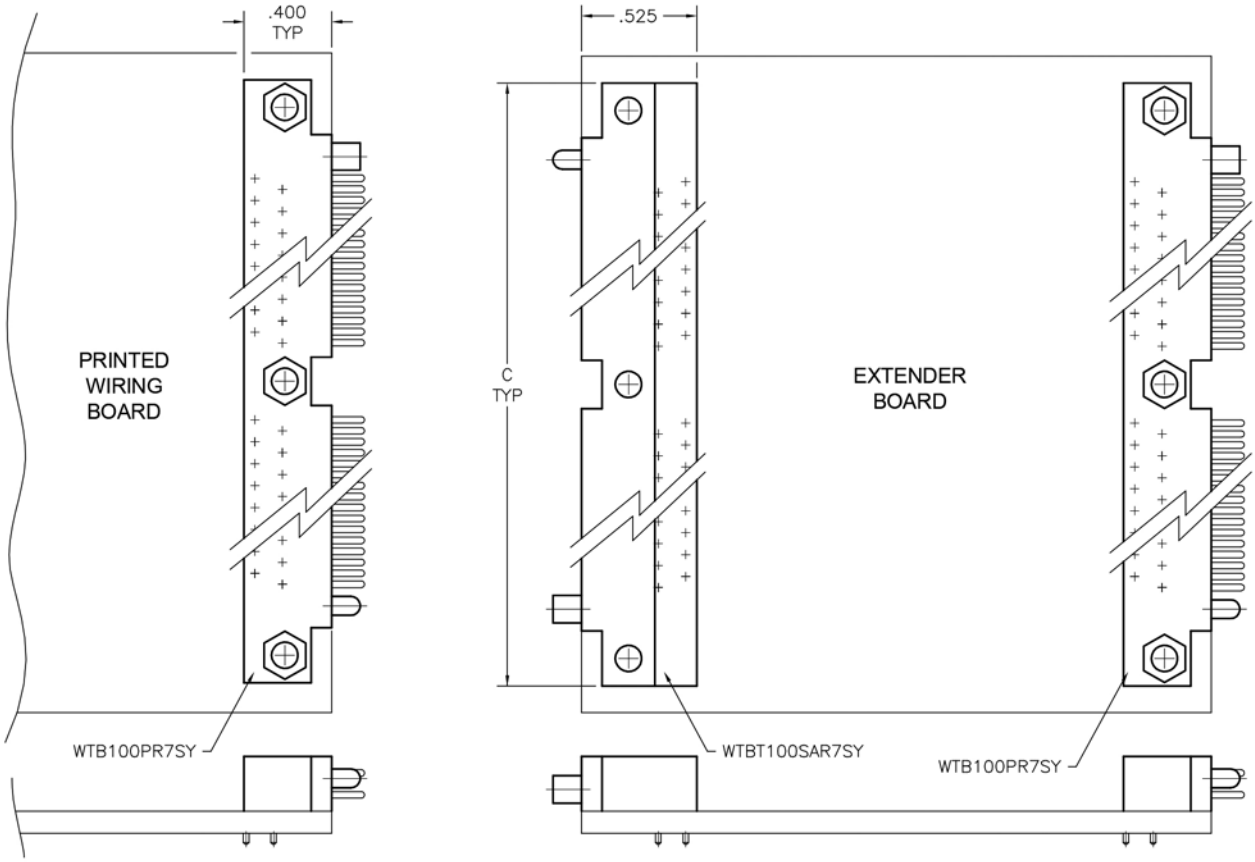



Downloaded from Arrow.com.

THREE ROW – PC CARD-TO-BOARD OR CHASSIS

WG - WG

0.100" I 50 THROUGH 104 CONTACTS

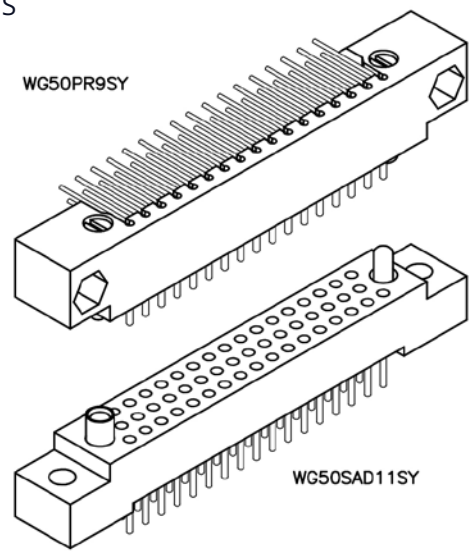

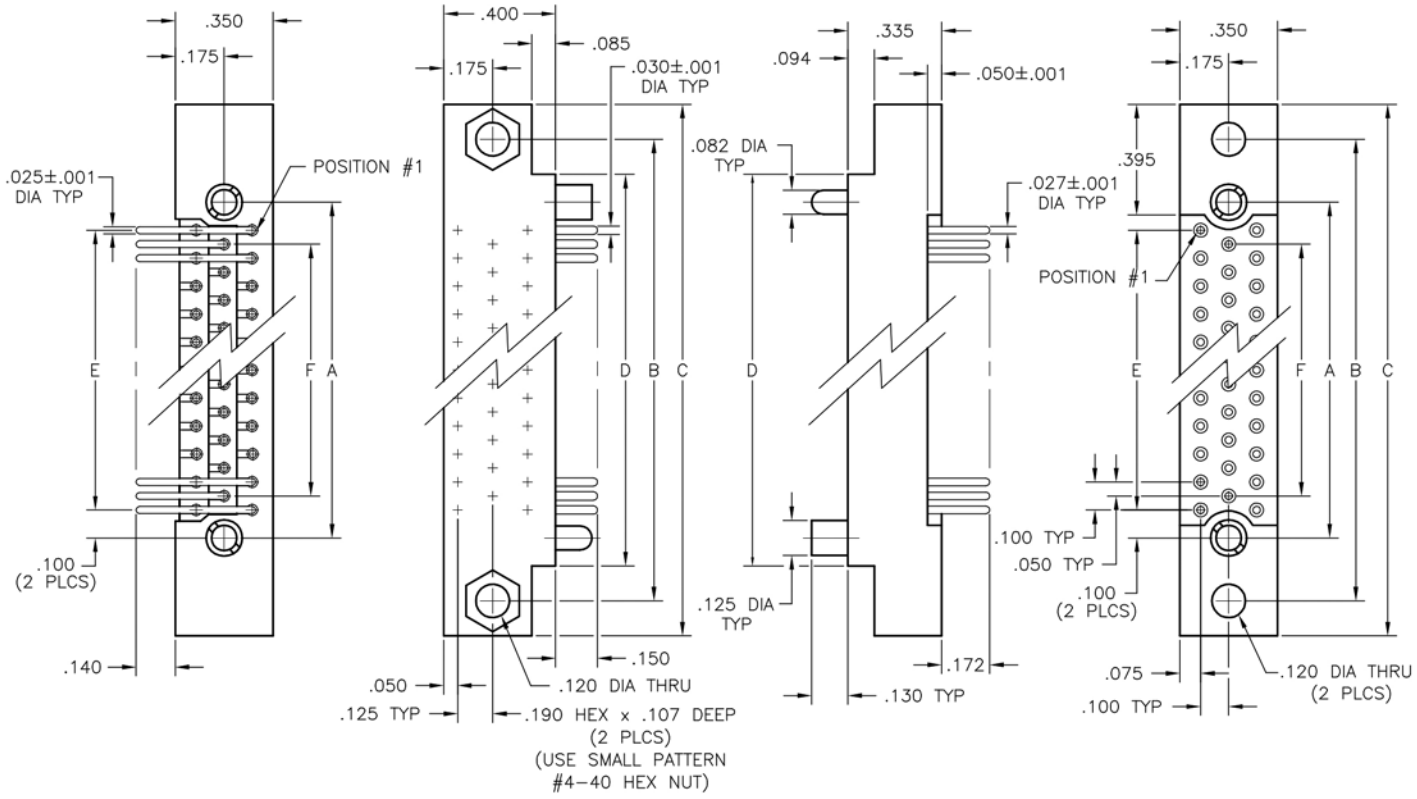

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WG 50 PR9 SY
RECEPTACLE: WG 50 SAD11 SY
XX XX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WG	Plug, right angle, with mounting ears	WG	Receptacle, straight, with mounting ears
		WG	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (50, 62, 80, 92, or 104)	XX	Number of contacts (50, 62, 80, 92, or 104)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PR15	Pin, right angle, dip solder, .234" x .025" dia
PRW34	Pin, right angle, wire wrap®, .531"
PRW42	Pin, right angle, wire wrap®, .656"

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WG50PR9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
JT	Turning jackset, .435"
JTA	Turning jackset, .135"
JTB	Hex turning jackset, .135"
JTC	Hex turning jackset, .435"
JTL	Turning jackset, long, .635"


SY	Guide set
SY-#	Guide set, polarized
SYL	Guide set, long
J	Fixed jackset
JL	Fixed jackset, long

OPTIONS

- Option Codes: Add to the end of the part number. Example: WG80PR9SY342. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 options
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

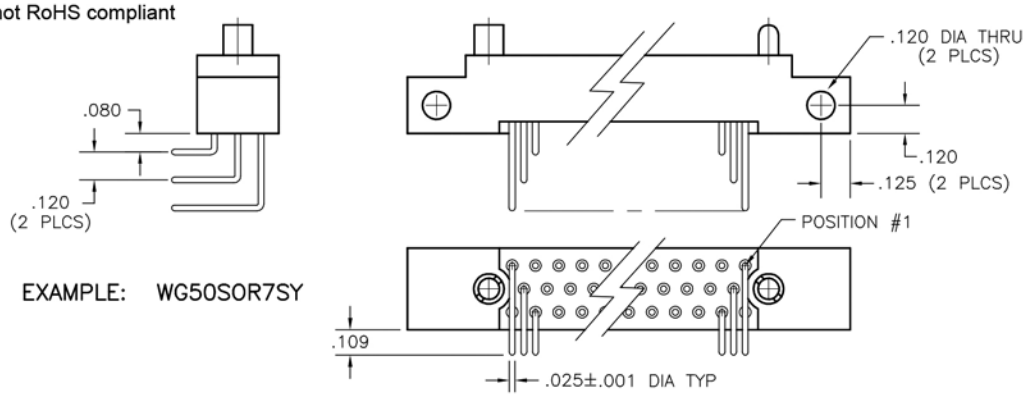



EXAMPLE: WG50SOR7SY

Downloaded from Arrow.com.

THREE ROW – SANDWICH BOARDS

WGV - WG
0.100" I 50 THROUGH 104 CONTACTS

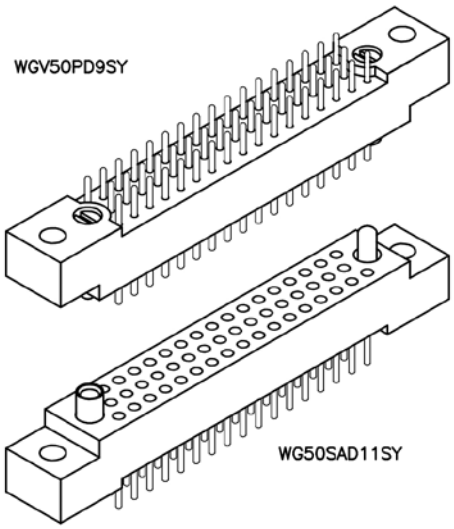

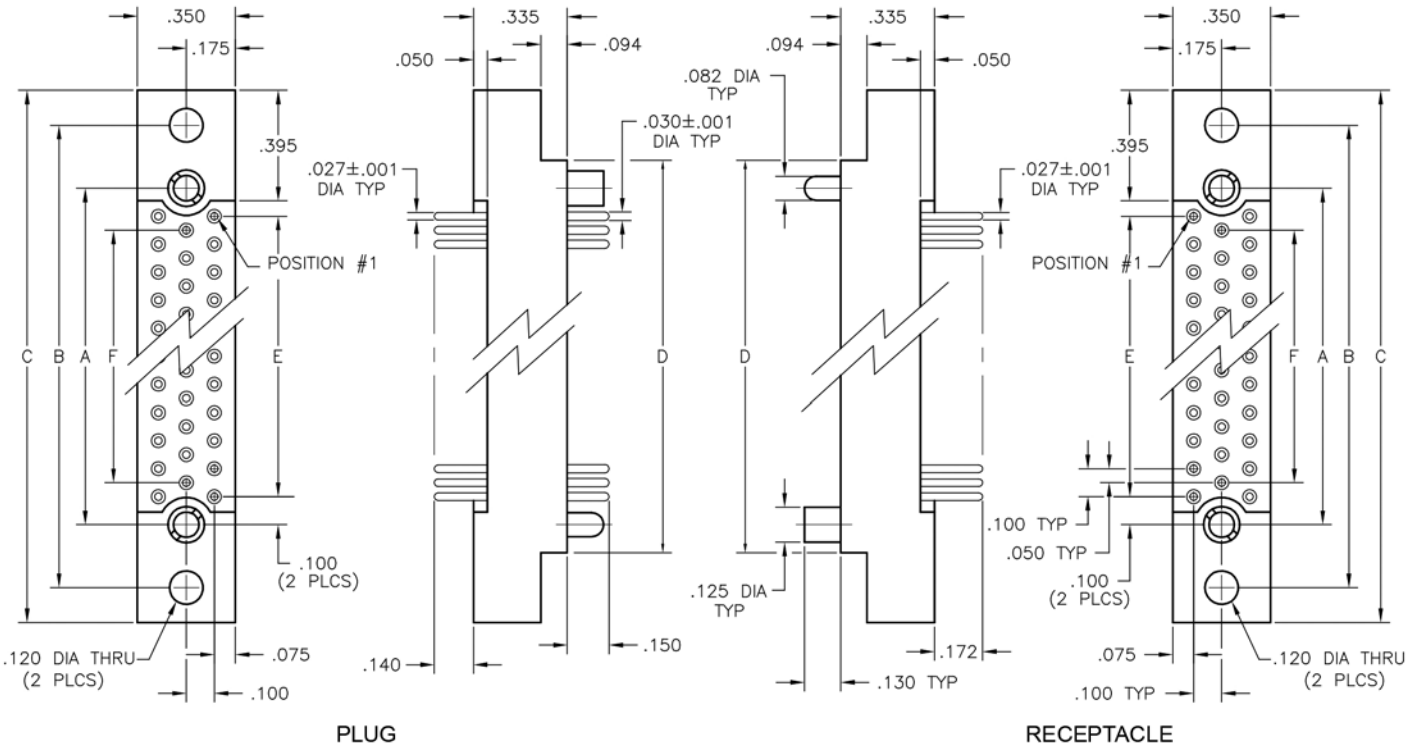

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WGV	50	PD9 SY
RECEPTACLE:	WG	50	SAD11 SY
	XXX	XX	XXXXX XX

SERIES

PLUG		RECEPTACLE	
WGV	Plug, with mounting ears	WG	Receptacle, straight, with mounting ears
		WG	Receptacle, right angle, with mounting ears

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (50, 62, 80, 92, or 104)	XX	Number of contacts (50, 62, 80, 92, or 104)

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

PLUG	TYPE CONTACTS/TERMINATIONS:	RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD13	Pin, straight, dip solder, .203" x .027" dia	SAF3	Socket, straight, flex circuit, .050"
PF3	Pin, straight, flex circuit, .050"	SAF6	Socket, straight, flex circuit, .093"
PF6	Pin, straight, flex circuit, .093"	SAF9	Socket, straight, flex circuit, .140"
PF8	Pin, straight, flex circuit, .125"	SAG7	Socket, straight, dip solder, .109" x .018" dia
PW34	Pin, straight, wire wrap®, .531"	SAG9	Socket, straight, dip solder, .140" x .018" dia
PW40	Pin, straight, wire wrap®, .625"	SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WGV50PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
J	Fixed jackset	J	Fixed jackset
JL	Fixed jackset, long	JL	Fixed jackset, long
JT	Turning jackset, .500"	JT	Turning jackset, .500"
JTA	Turning jackset, .200"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"	JTB	Hex turning jackset, .200"
JTC	Turning jackset, .500"	JTC	Turning jackset, .500"
JTL	Turning jackset, long, .700"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WG80PR9SY342. Call factory for additional codes.


-342 Remove mounting ears. (.250" each end)
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

THREE ROW – PC CARD-TO-BOARD OR PC CARD

WG - WG
0.100" I 160 THROUGH 208 CONTACTS

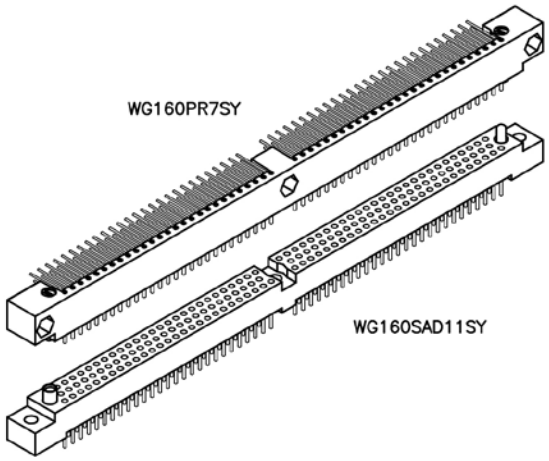

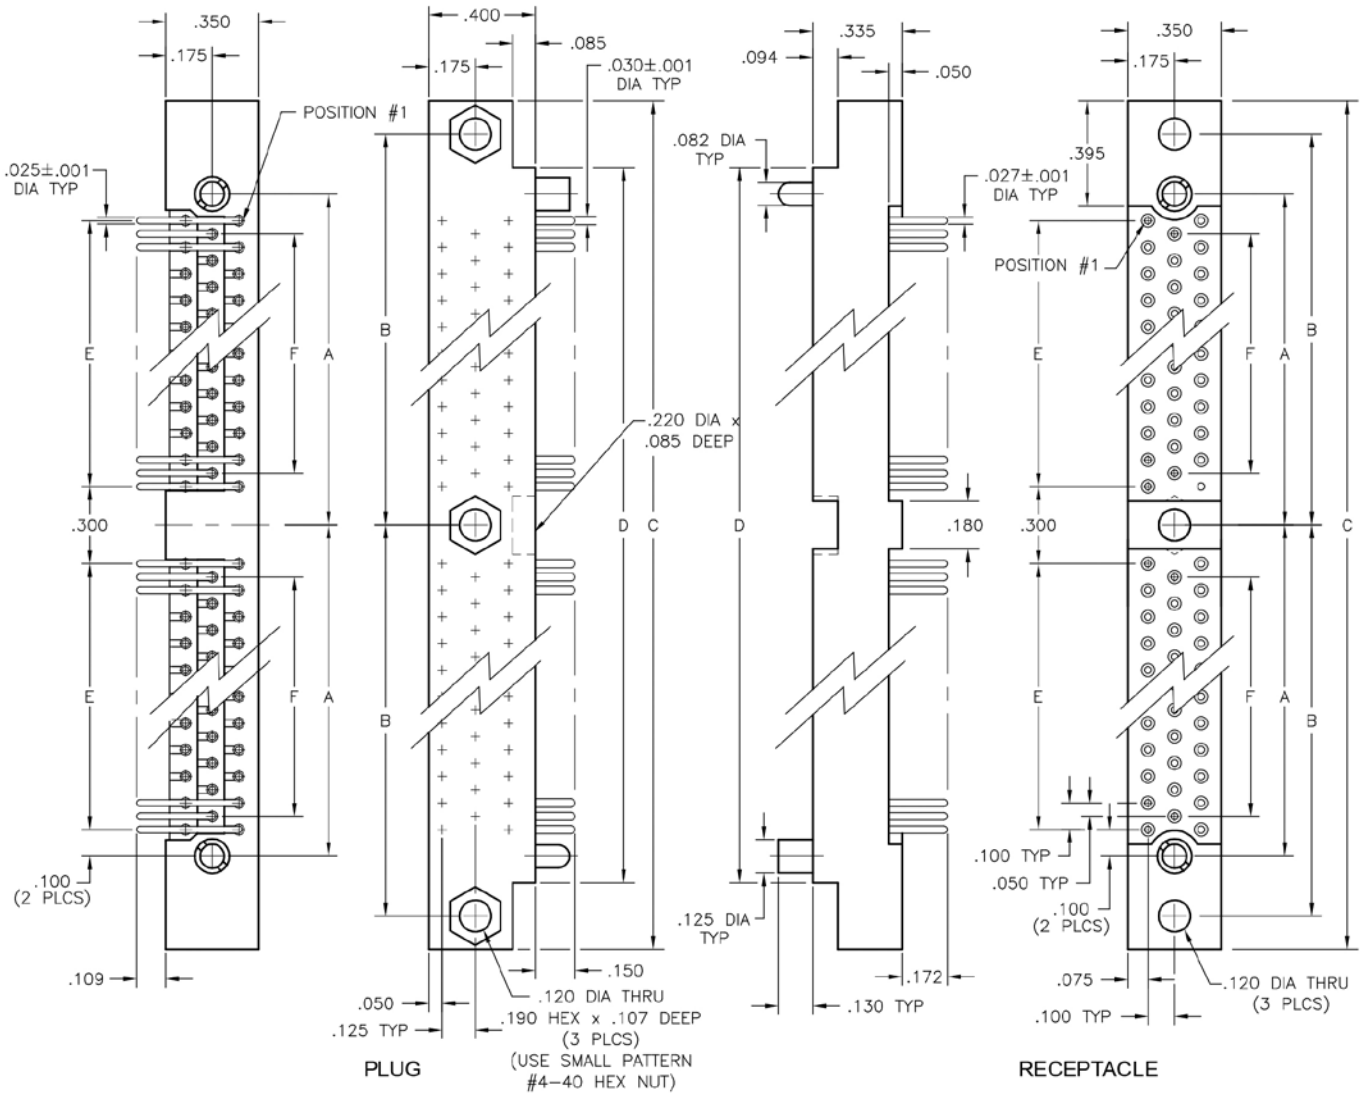

DIMENSIONS						
SIZE	A	B	C	D	E	F
160	2.850	3.075	6.400	5.900	2.600	2.500
208	3.650	3.875	8.000	7.500	3.400	3.300

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WG 160 PR7 SY
RECEPTACLE: WG 160 SAD11 SY
XX XXX XXXXX XX

PLUG		RECEPTACLE	
SERIES			
WG	Plug, right angle, with mounting ears	WG	Receptacle, straight, with mounting ears
		WG	Receptacle, right angle, with mounting ears
SIZE			
XX	Number of contacts (160 or 208)	XX	Number of contacts (160 or 208)

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
		SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAF9	Socket, straight, flex circuit, .140"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WG160PR9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.


SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
JT	Turning jackset, .435"	J	Fixed jackset
JTA	Turning jackset, .135"	JL	Fixed jackset, long
JTB	Hex turning jackset, .135"		
JTC	Hex turning jackset, .435"		
JTL	Turning jackset, long, .635"		

OPTIONS


- Option Codes: Add to the end of the part number. Example: WG160PR9SY548. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant




EXAMPLE: WG160SOR7SY

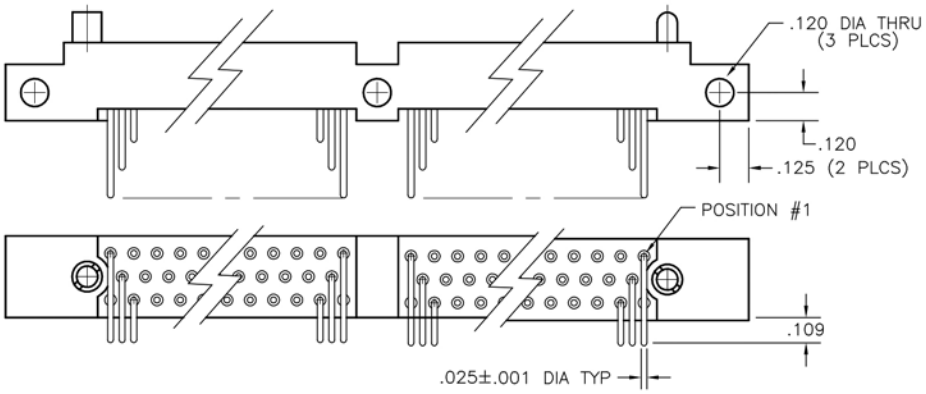


Downloaded from Arrow.com.

THREE ROW – PC CARD-TO-CHASSIS

WG - WGKA
0.100" I 50 THROUGH 160 CONTACTS

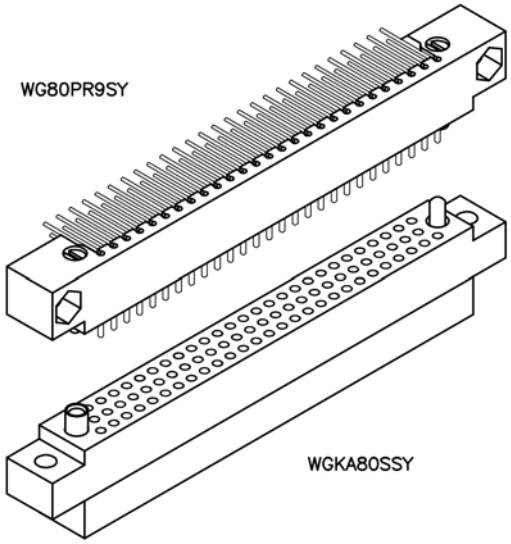

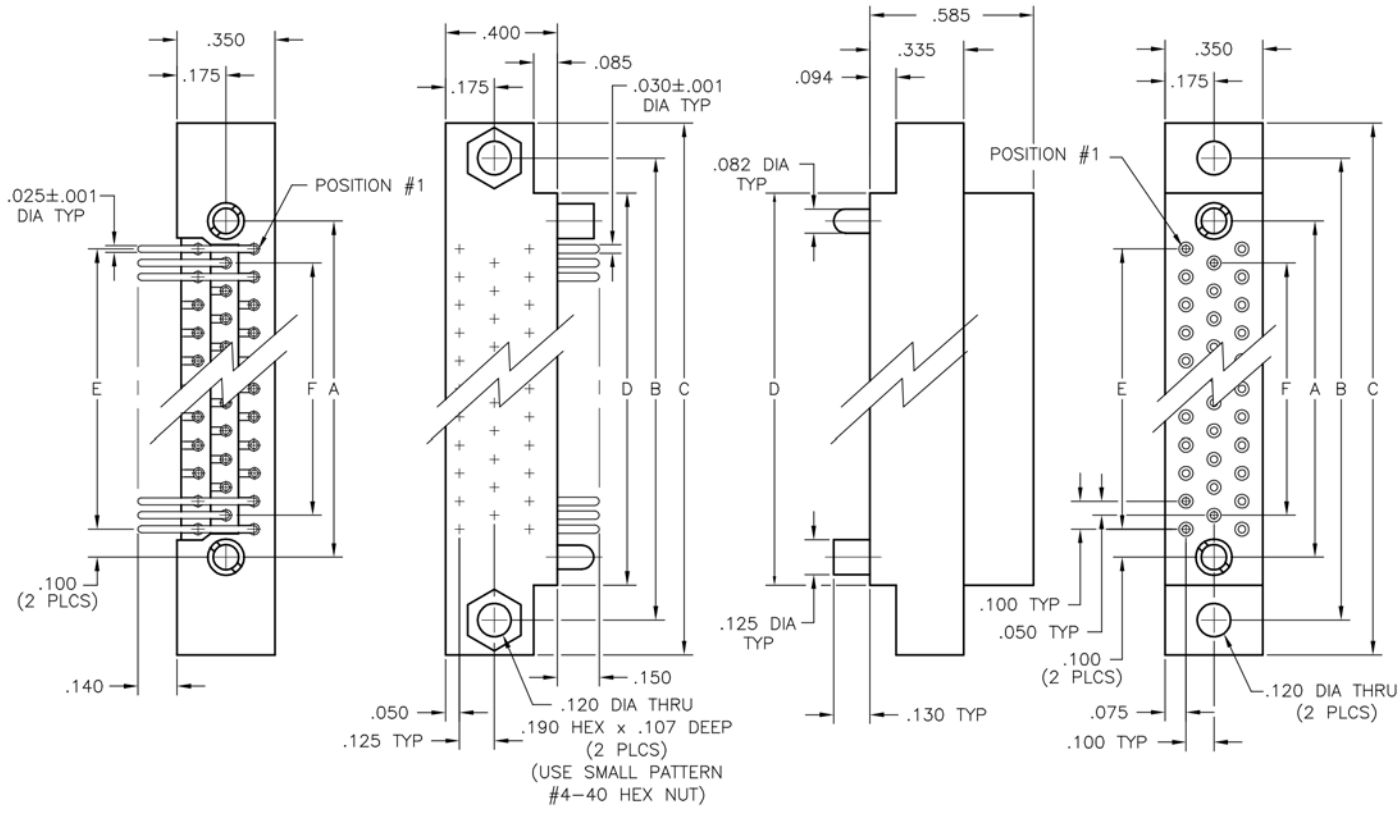


PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300
160*	2.850	3.075	6.400	5.900	2.600	2.500


* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Downloaded from Arrow.com.


SMT CONFIGURATION OPTIONS

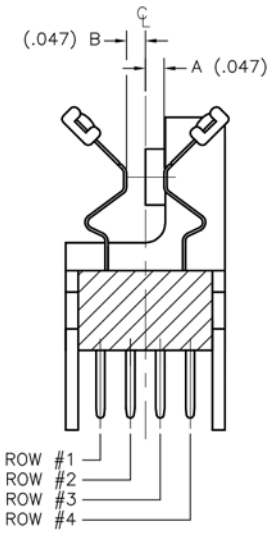


STYLE 933

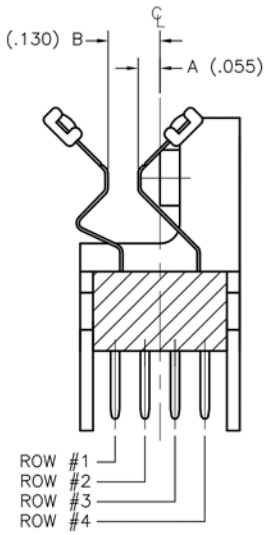


STYLE 925

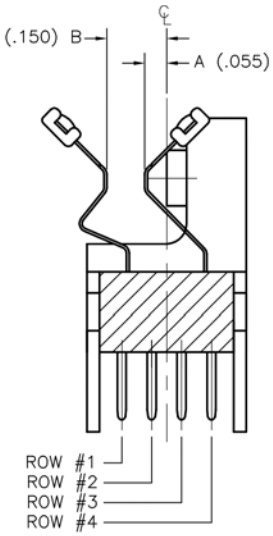

STYLE 927

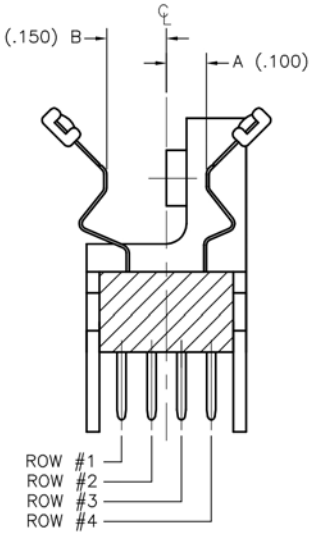

STYLE 947

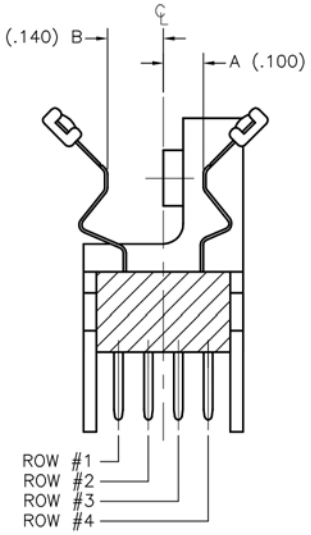


STYLE 946

DISTANCE FROM ℄ (A)	DISTANCE FROM ℄ (A OR B)		DISTANCE FROM ℄ (B)
1 .005	3 .047	7 .150	0 .090
2 .055	4 .100	8 .070	
	5 .130	9 .080	
	6 .140		

NOTES:

1. Various board thicknesses can be accommodated by specifying A and B designators. For example: 9 (A)(B)
2. Consult factory for other available options.

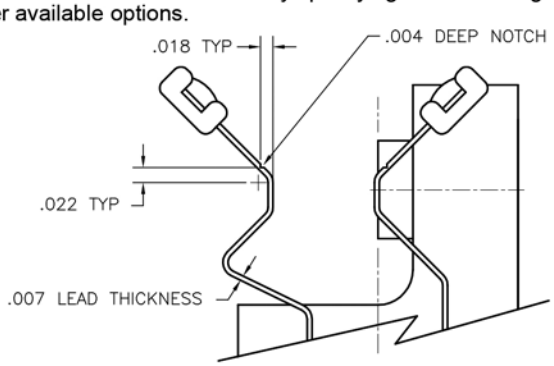



CONTACT NOTCH DETAIL

Downloaded from Arrow.com.

THREE ROW – CHASSIS-TO-CHASSIS

WGKVA - WGKA
0.100" I 50 THROUGH 160 CONTACTS

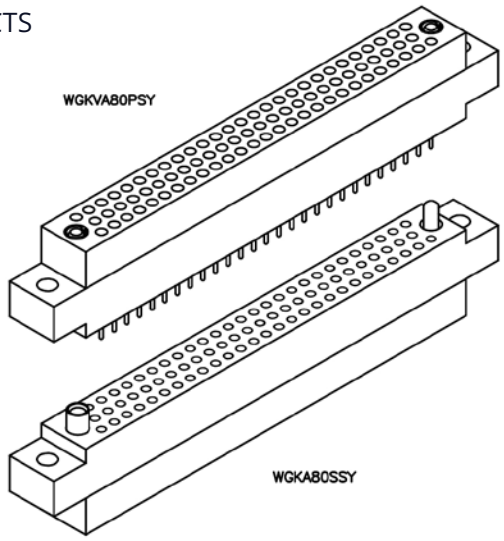

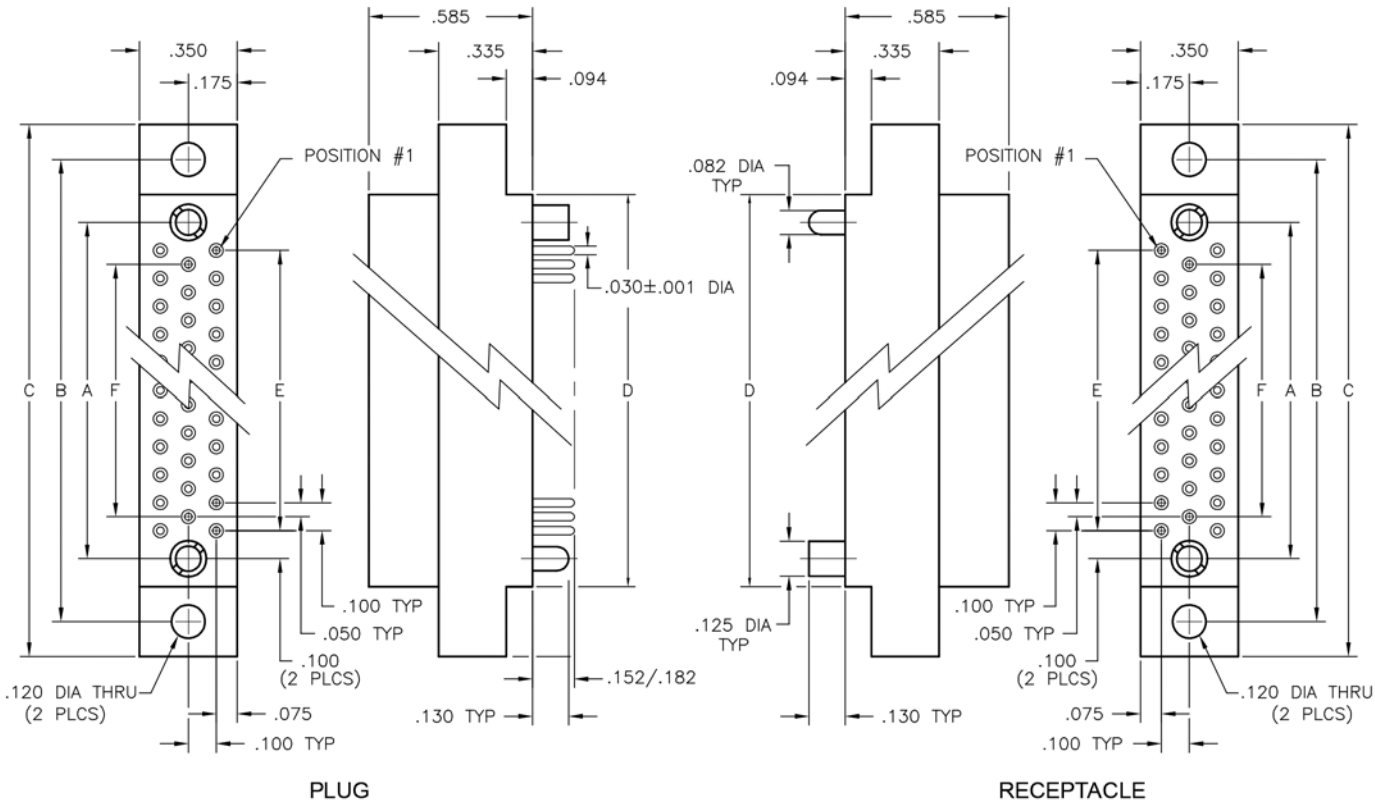

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300
160*	2.850	3.075	6.400	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WGKVA 80 P SY
RECEPTACLE: WGKA 80 S SY
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

PLUG		RECEPTACLE	
WGKVA	Plug, straight, crimp removable, with mounting ears	WGKA	Receptacle, straight, crimp removable, with mounting ears

- WGKVA and WGKA also mate with WG or WGV connectors. "A" means contacts are included.

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (50, 62, 80, 92, 104 or 160)	XX	Number of contacts (50, 62, 80, 92, 104 or 160)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG	TYPE CONTACTS/TERMINATIONS:	RECEPTACLE	TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight , crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .500"	JT	Turning jackset, .500"
JTA	Turning jackset, .200"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"	JTL	Turning jackset, long, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WGDXA80SSY-C45. Call factory for additional codes.

-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

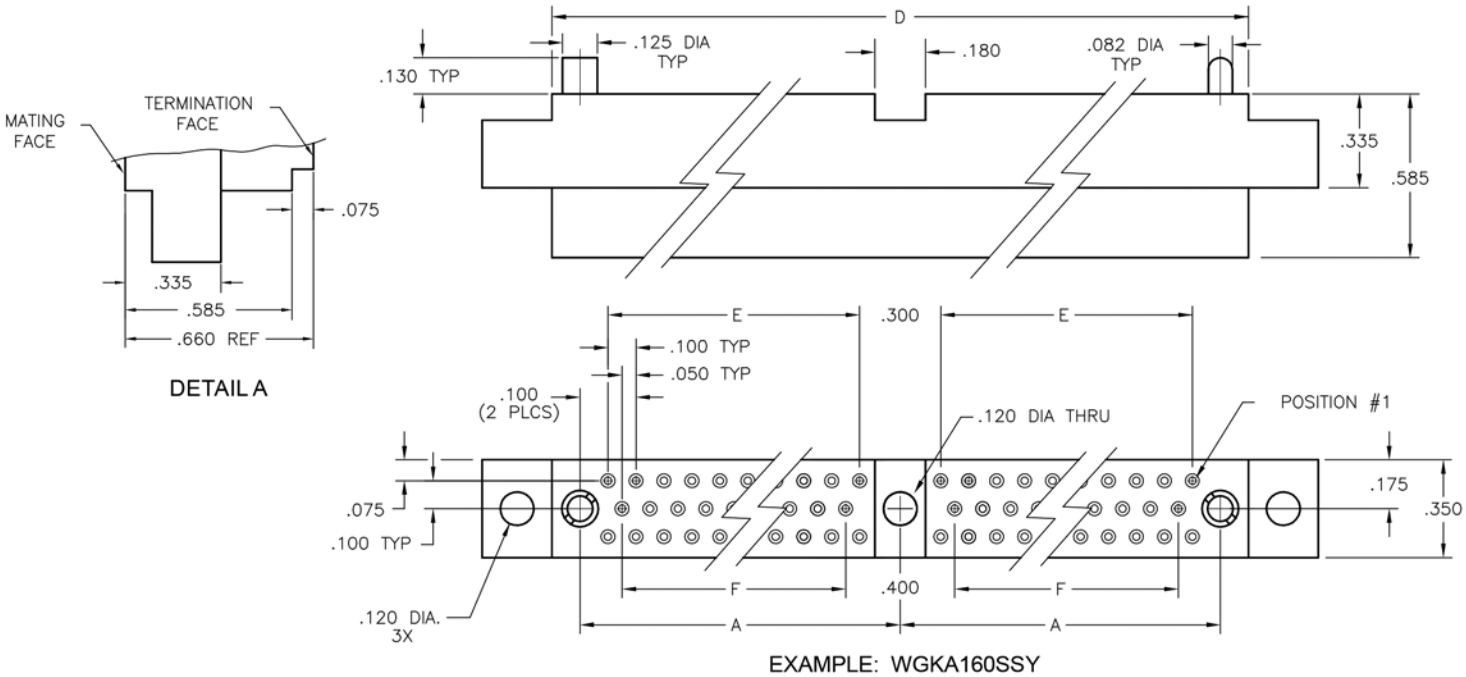



EXAMPLE: WGKA160SSY

Downloaded from Arrow.com.

THREE ROW – PC CARD-TO-CHASSIS

WG - WGDXA
0.100" I 50 THROUGH 160 CONTACTS

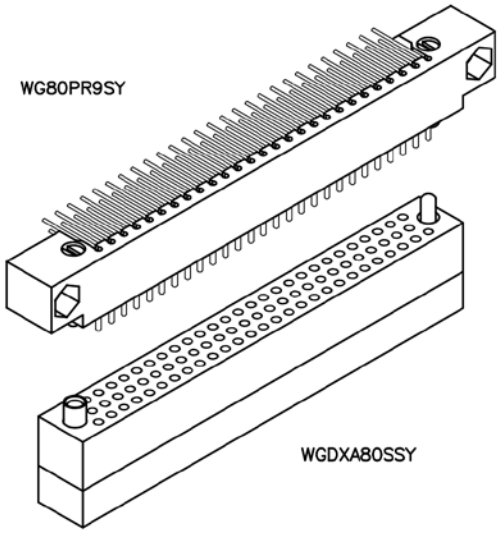

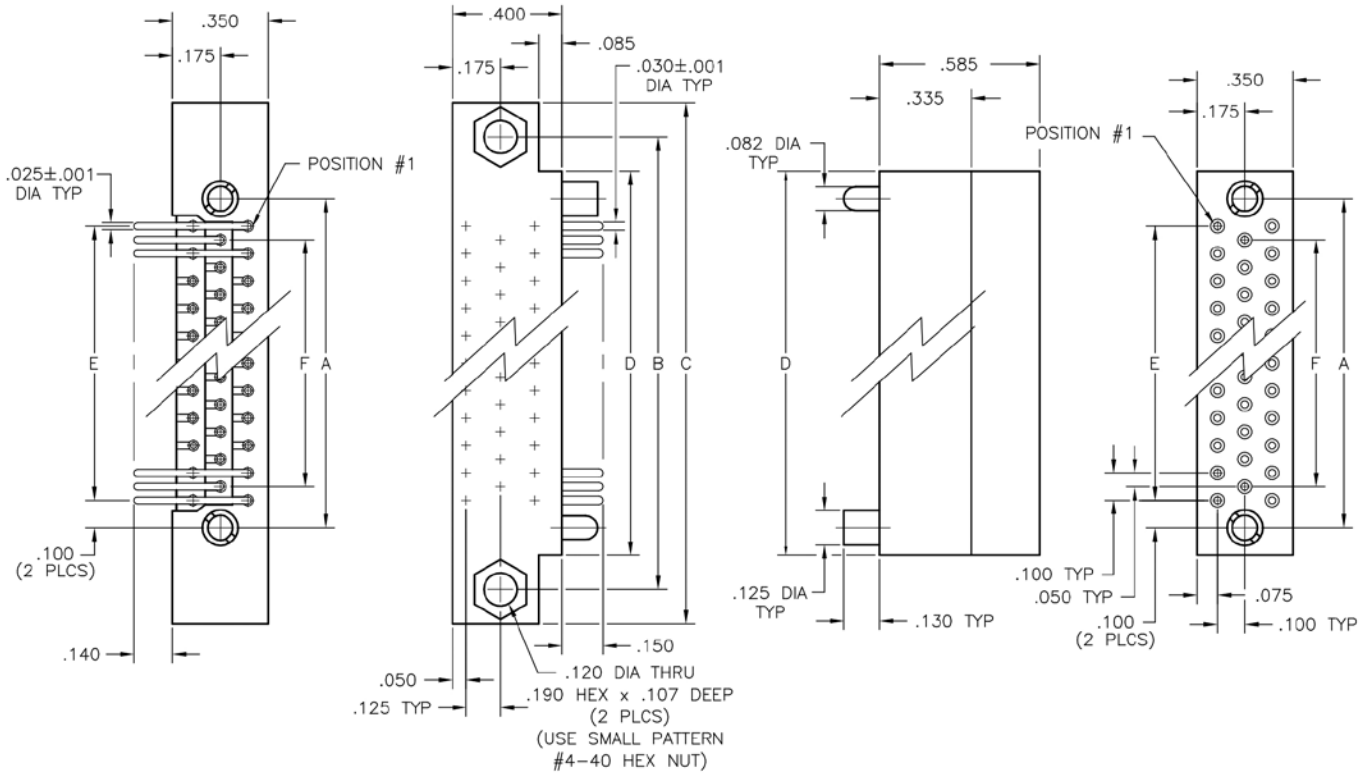

PLUG RECEPTACLE

DIMENSIONS						
SIZE	A	B	C	D	E	F
50	1.800	2.250	2.500	2.000	1.600	1.500
62	2.200	2.650	2.900	2.400	2.000	1.900
80	2.800	3.250	3.500	3.000	2.600	2.500
92	3.200	3.650	3.900	3.400	3.000	2.900
104	3.600	4.050	4.300	3.800	3.400	3.300
160*	2.850	3.075	6.400	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	WG	80	PR9	SY
RECEPTACLE:	WGDXA	80	S	SY
	XXXXX	XX	XXX	XX

PLUG	RECEPTACLE

SERIES

PLUG		RECEPTACLE	
WG	Plug, right angle, with mounting ears	WGDXA	Receptacle, straight, crimp removable, without mounting ears

- WGKA and WGDXA also mate with WGV connectors. "A" means contacts are included.

SIZE

PLUG		RECEPTACLE	
XX	Number of contacts (50, 62, 80, 92, 104 or 160)	XX	Number of contacts (50, 62, 80, 92, 104 or 160)

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- The contact type determines the image of the connector. Pin, right angle contacts are always plug image. Straight pin or sockets are receptacle image.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

PLUG TYPE	CONTACTS/TERMINATIONS:	RECEPTACLE TYPE	CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG
PRW40	Pin, right angle, wire wrap®, .625"		


HARDWARE

PLUG		RECEPTACLE	
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
		JT	Turning jackset, .500"
		JTA	Turning jackset, .200"
		JTB	Hex turning jackset, .200"
		JTC	Hex turning jackset, .500"
		JTL	Turning jackset, long, .700"


OPTIONS

- Option Codes: Add to the end of the part number. Example: WGDXA80SSY-C45. Call factory for additional codes.

-548	Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-A53	Socket, straight, crimp removable, 20 AWG
-C45	Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

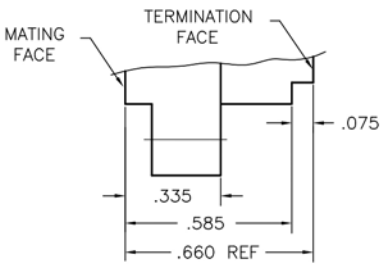

DETAIL A

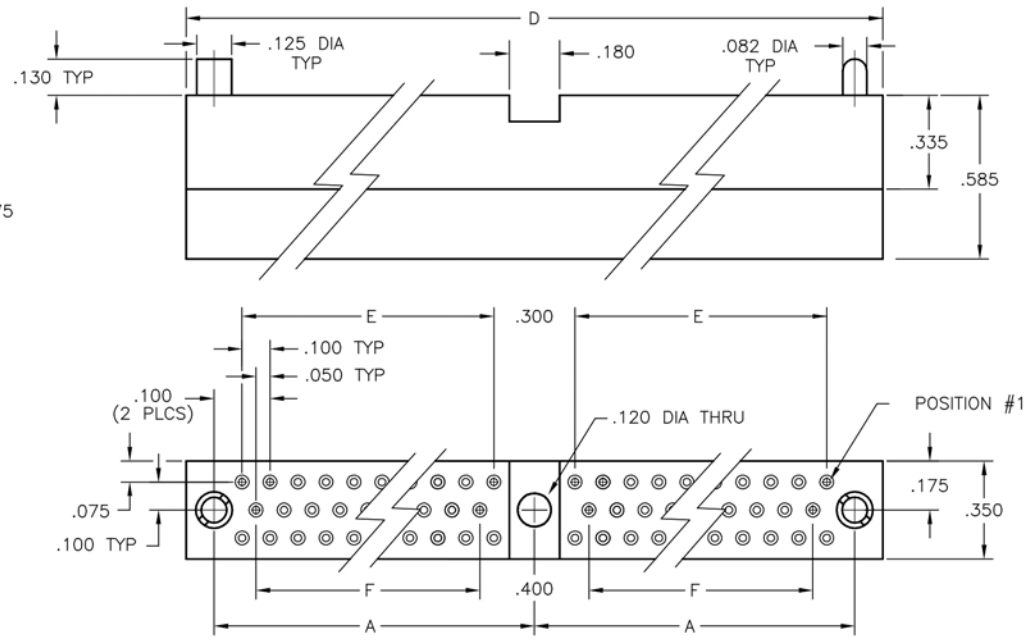



EXAMPLE: WGDXA160SSY

Downloaded from Arrow.com.

THREE ROW – CHASSIS-TO-CHASSIS

WGDVA - WGDXA
0.100" I 50 THROUGH 160 CONTACTS

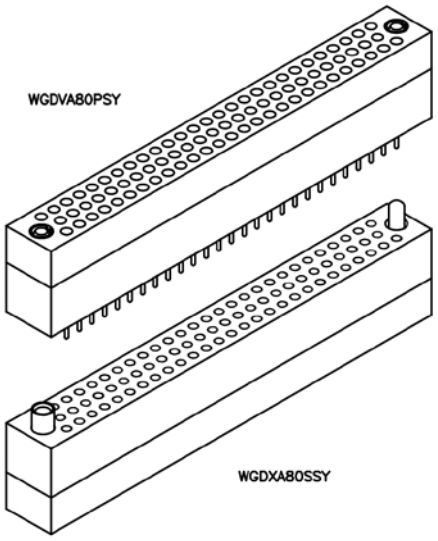

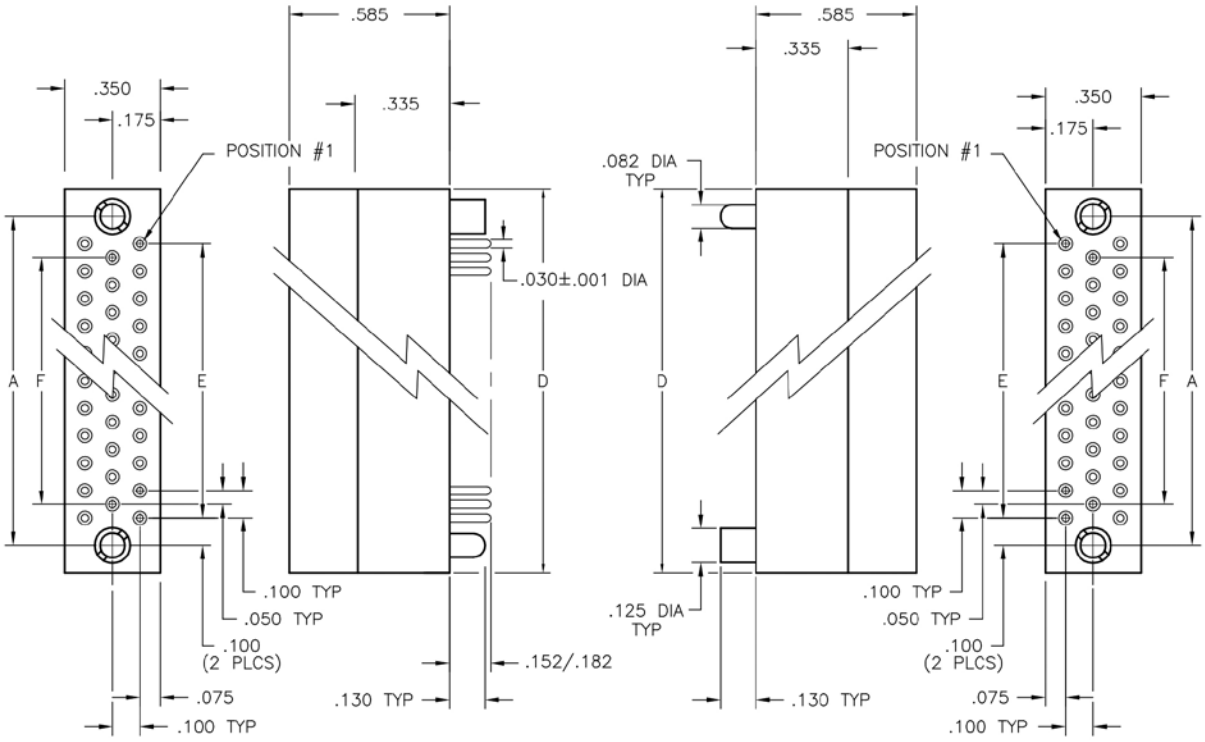

PLUG RECEPTACLE

DIMENSIONS				
SIZE	A	D	E	F
50	1.800	2.000	1.600	1.500
62	2.200	2.400	2.000	1.900
80	2.800	3.000	2.600	2.500
92	3.200	3.400	3.000	2.900
104	3.600	3.800	3.400	3.300
160*	2.850	5.900	2.600	2.500

* = SEE OPPOSITE PAGE FOR 160 POSITION CONFIGURATION

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS


PLUG: WGDVA 80 P SY
RECEPTACLE: WGDXA 80 S SY
XXXXX XX XXX XX

PLUG		RECEPTACLE	
SERIES			
WGDVA	Plug, straight, crimp removable, without mounting ears	WGDXA	Receptacle, straight, crimp removable, without mounting ears
● WGDVA and WGDXA also mate with WG or WGV connectors. "A" means contacts are included.			
SIZE			
XX	Number of contacts (50, 62, 80, 92, 104 or 160)	XX	Number of contacts (50, 62, 80, 92, 104 or 160)
CONTACTS			
● The use of gaskets is not recommended with crimp socket contacts.			
● When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, crimp removable, 22 AWG	S	Socket, straight, crimp removable, 22 AWG
S	Socket, straight , crimp removable, 22 AWG	SA	Same as above
SA	Same as above	P	Pin, straight, crimp removable, 22 AWG
HARDWARE			
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .500"	JT	Turning jackset, .500"
JTA	Turning jackset, .200"	JTA	Turning jackset, .200"
JTB	Hex turning jackset, .200"	JTB	Hex turning jackset, .200"
JTC	Hex turning jackset, .500"	JTC	Hex turning jackset, .500"
JTL	Turning jackset, long, .700"	JTL	Turning jackset, long, .700"


OPTIONS

● Option Codes: Add to the end of the part number. Example: WGDXA80SSY-C45. Call factory for additional codes.

-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

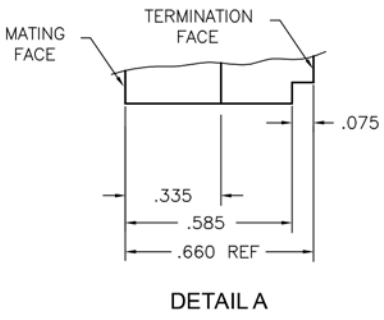

DETAIL A

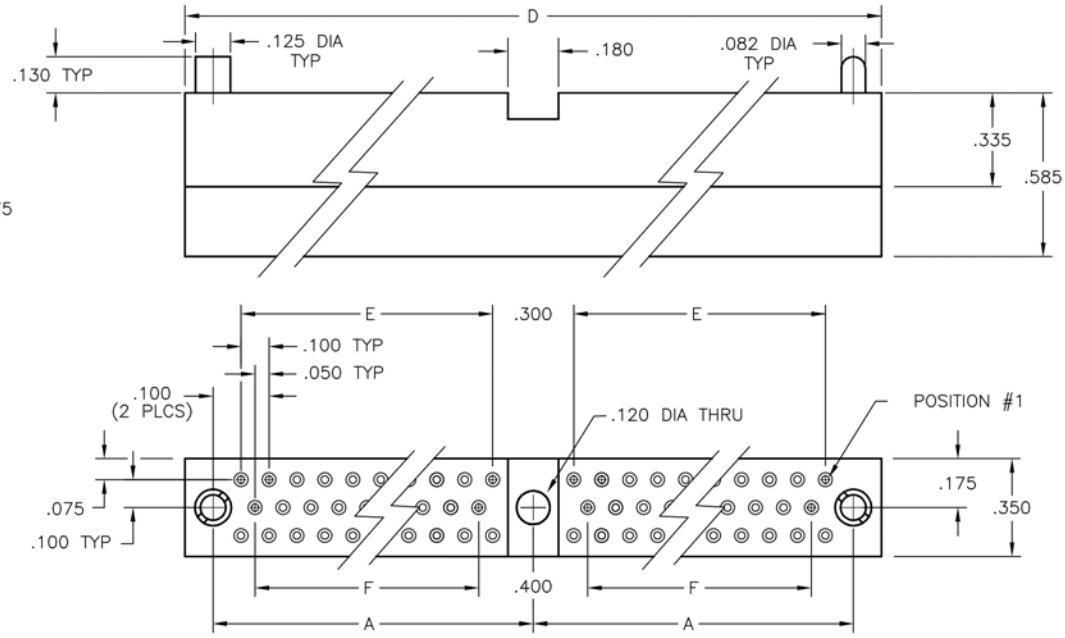



EXAMPLE: WGDXA160SSY

Downloaded from Arrow.com.

THREE ROW – PC CARD-TO-BOARD OR CHASSIS

WGR - WGR
0.100" I 92 CONTACTS

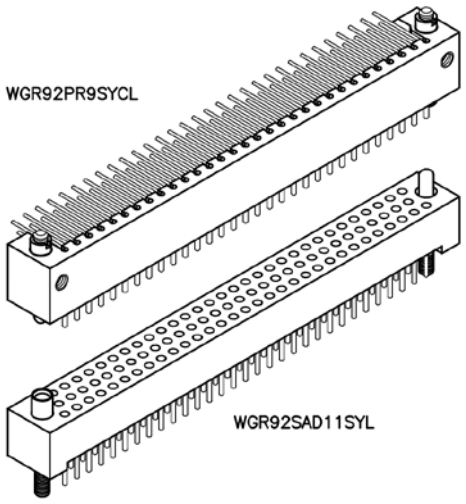

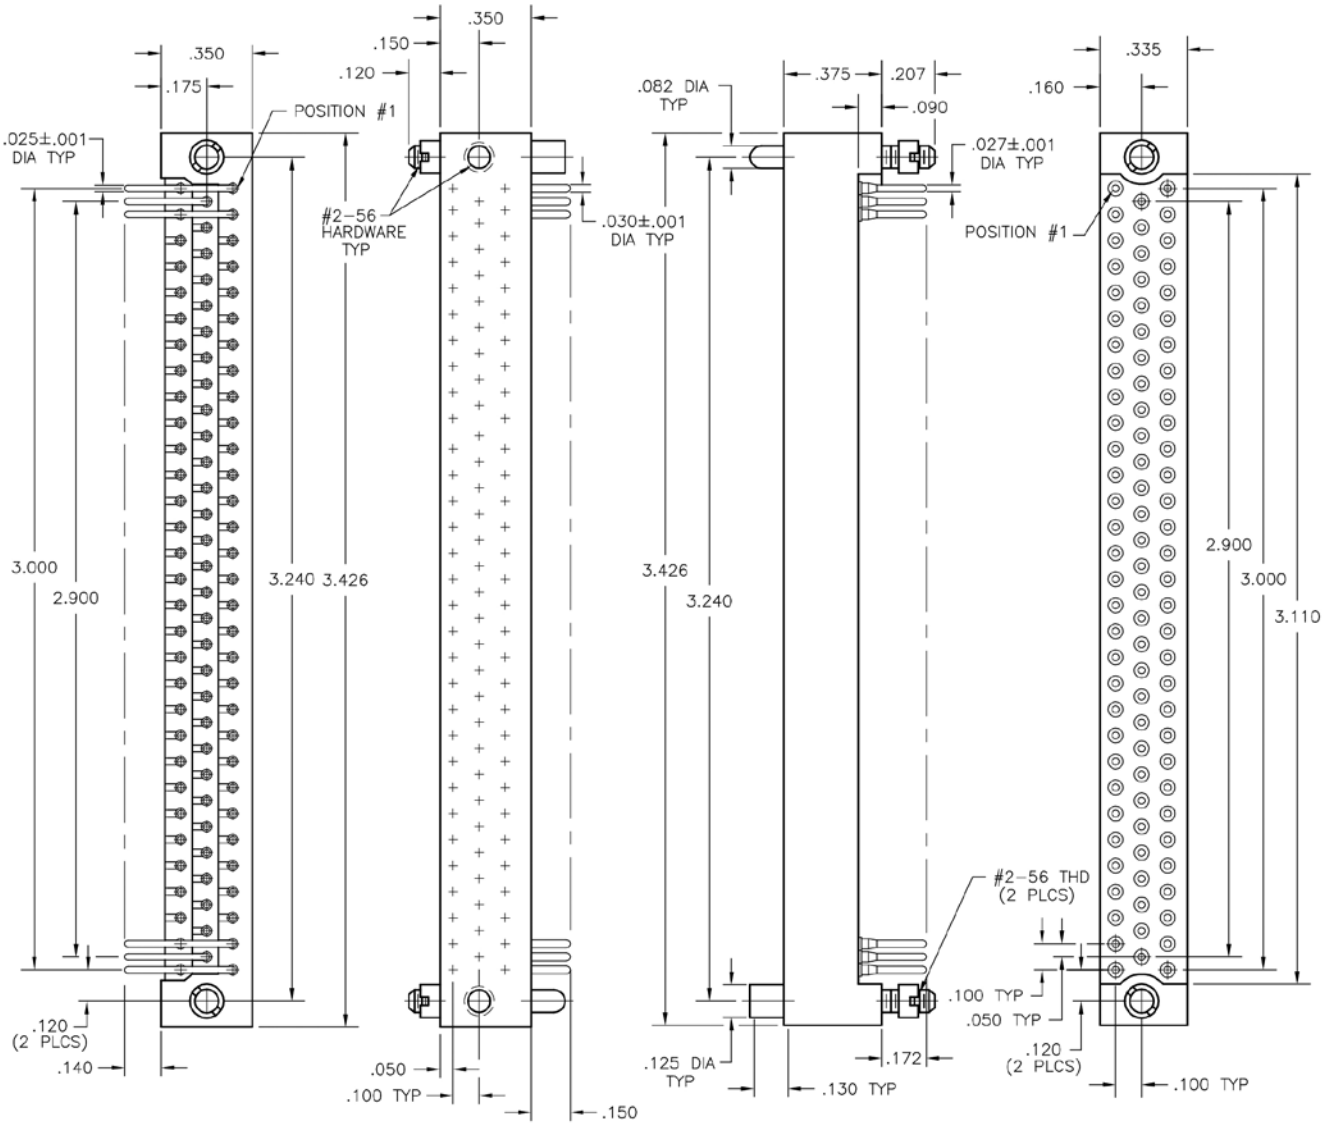

PLUG RECEPTACLE

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WGR 92 PR9 SYCL
RECEPTACLE: WGR 92 SAD11 SYL
XXX XX XXXXX XXXX

PLUG		RECEPTACLE	
SERIES			
WGR	Plug, right angle, without mounting ears	WGR	Receptacle, straight, without mounting ears
SIZE			
92	Number of contacts	92	Number of contacts

CONTACTS

- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia

TYPE CONTACTS/TERMINATIONS:	
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAD16	Socket, straight, dip solder, .250" x .027" dia
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW40	Socket, straight, wire wrap®, .625"
SAF6	Socket, straight, flex circuit, .093"

HARDWARE


SYCL	Guide set, cross hole mount	SYL	Guide set, long
JCL	Fixed jackset, cross hole mount	JT	Turning jackset, .460"
		JTA	Turning jackset, .160"

OPTIONS


- Option Codes: Add to the end of the part number. Example: WGR92PR9JCL-D01. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).


☒ = Option not RoHS compliant

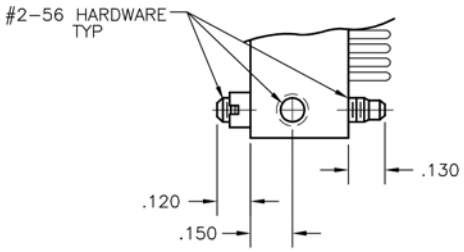

EXAMPLE: -JCL HARDWARE
(PLUG)

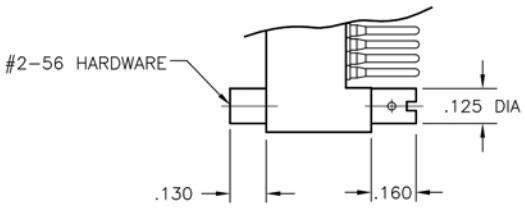

EXAMPLE: -JTA HARDWARE
(RECEPTACLE)

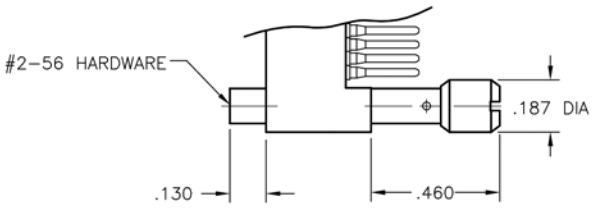



EXAMPLE: -JT HARDWARE
(RECEPTACLE)

Downloaded from Arrow.com.

THREE ROW – PC CARD-TO-BOARD OR CHASSIS

WGA - WGA
0.100" I 122 CONTACTS

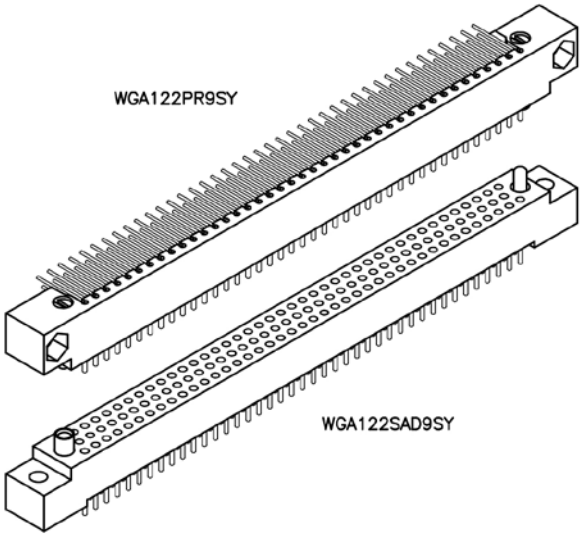

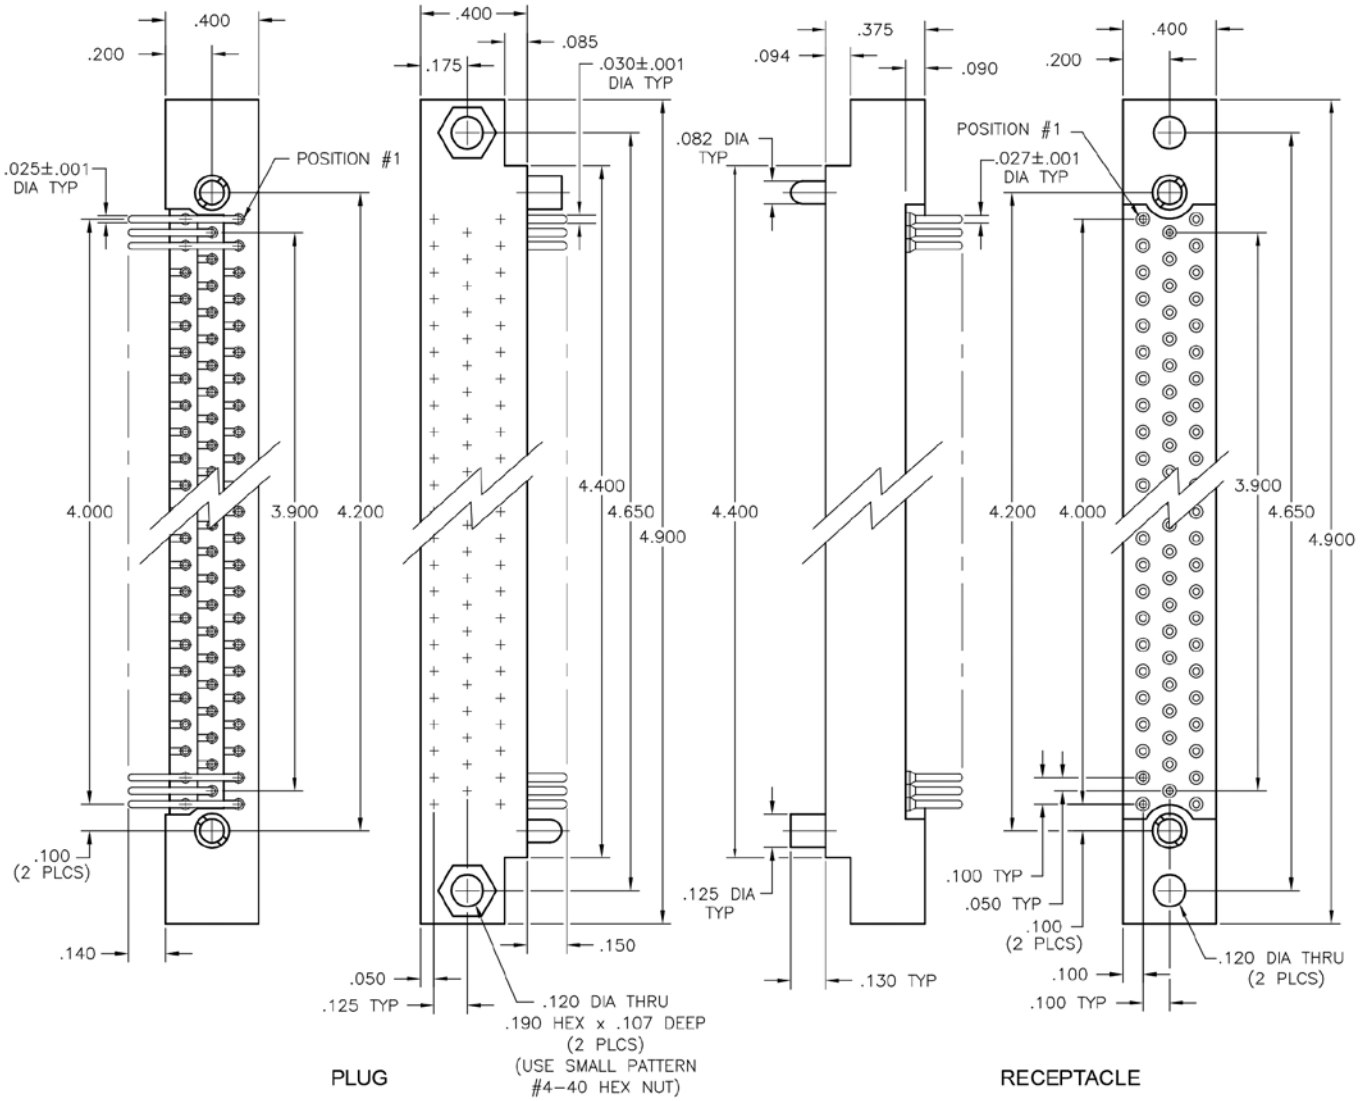

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WGA 122 PR9 SY
RECEPTACLE: WGA 122 SAD9 SY
XXX XXX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WGA	Plug, right angle, with mounting ears	WGA	Receptacle, straight, with mounting ears
		WGA	Receptacle, right angle, with mounting ears
SIZE			
122	Number of contacts	122	Number of contacts

CONTACTS

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

	TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia
PRW32	Pin, right angle, wire wrap®, .500"

	TYPE CONTACTS/TERMINATIONS:
SAC	Socket, straight, solder cup (.035" I.D.)
SAD7	Socket, straight, dip solder, .109" x .027" dia
SAD9	Socket, straight, dip solder, .140" x .027" dia
SAD11	Socket, straight, dip solder, .172" x .027" dia
SAF3	Socket, straight, flex circuit, .050"
SAF6	Socket, straight, flex circuit, .093"
SAF9	Socket, straight, flex circuit, .140"
SAG7	Socket, straight, dip solder, .109" x .018" dia
SAG9	Socket, straight, dip solder, .140" x .018" dia
SAG11	Socket, straight, dip solder, .172" x .018" dia
SAP	Socket, straight, pin termination .150", connector saver
SAW24	Socket, straight, wire wrap®, .375"
SAW40	Socket, straight, wire wrap®, .625"
SOR7	Socket, right angle, dip solder, .109" x .025" dia
SOR9	Socket, right angle, dip solder, .140" x .025" dia
SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE


SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, .435"	JL	Fixed jackset, long
JTA	Turning jackset, .135"	JT	Turning jackset, .460"
JTB	Hex turning jackset, .135"	JTA	Turning jackset, .160"
JTC	Turning jackset, .435"	JTB	Hex turning jackset, .160"
JTL	Turning jackset, long, .635"	JTC	Turning jackset, .460"
		JTL	Turning jackset, long, .660"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WGA122PR9SY548. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)
-413 Straight pin contacts in right angle plug molding with solder cup terminals extending .100" beyond molding.
-D54 Combine -B82 and -D01 special codes.

☒ = Option not RoHS compliant

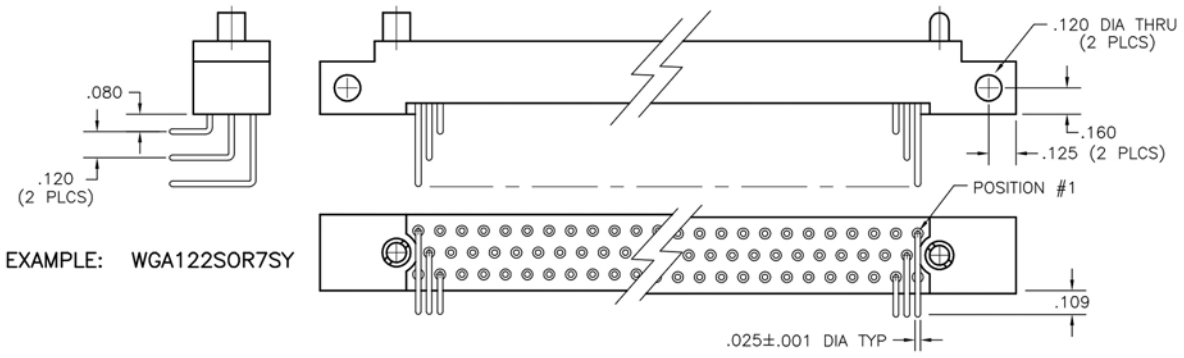



EXAMPLE: WGA122SOR7SY

Downloaded from Arrow.com.

THREE ROW – SANDWICH BOARDS

WGAV - WGA
0.100" I 122 CONTACTS

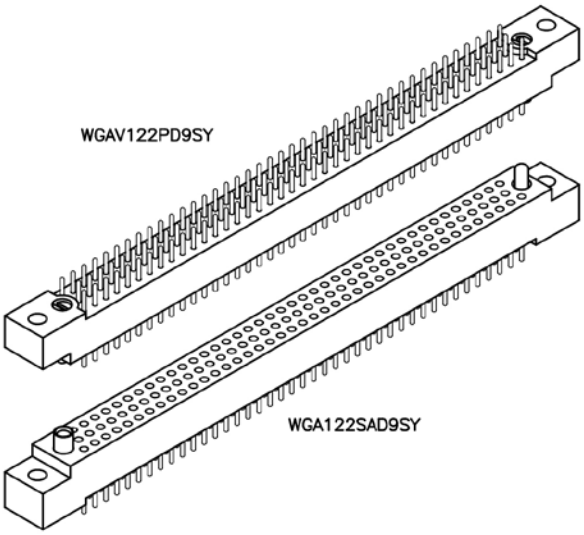

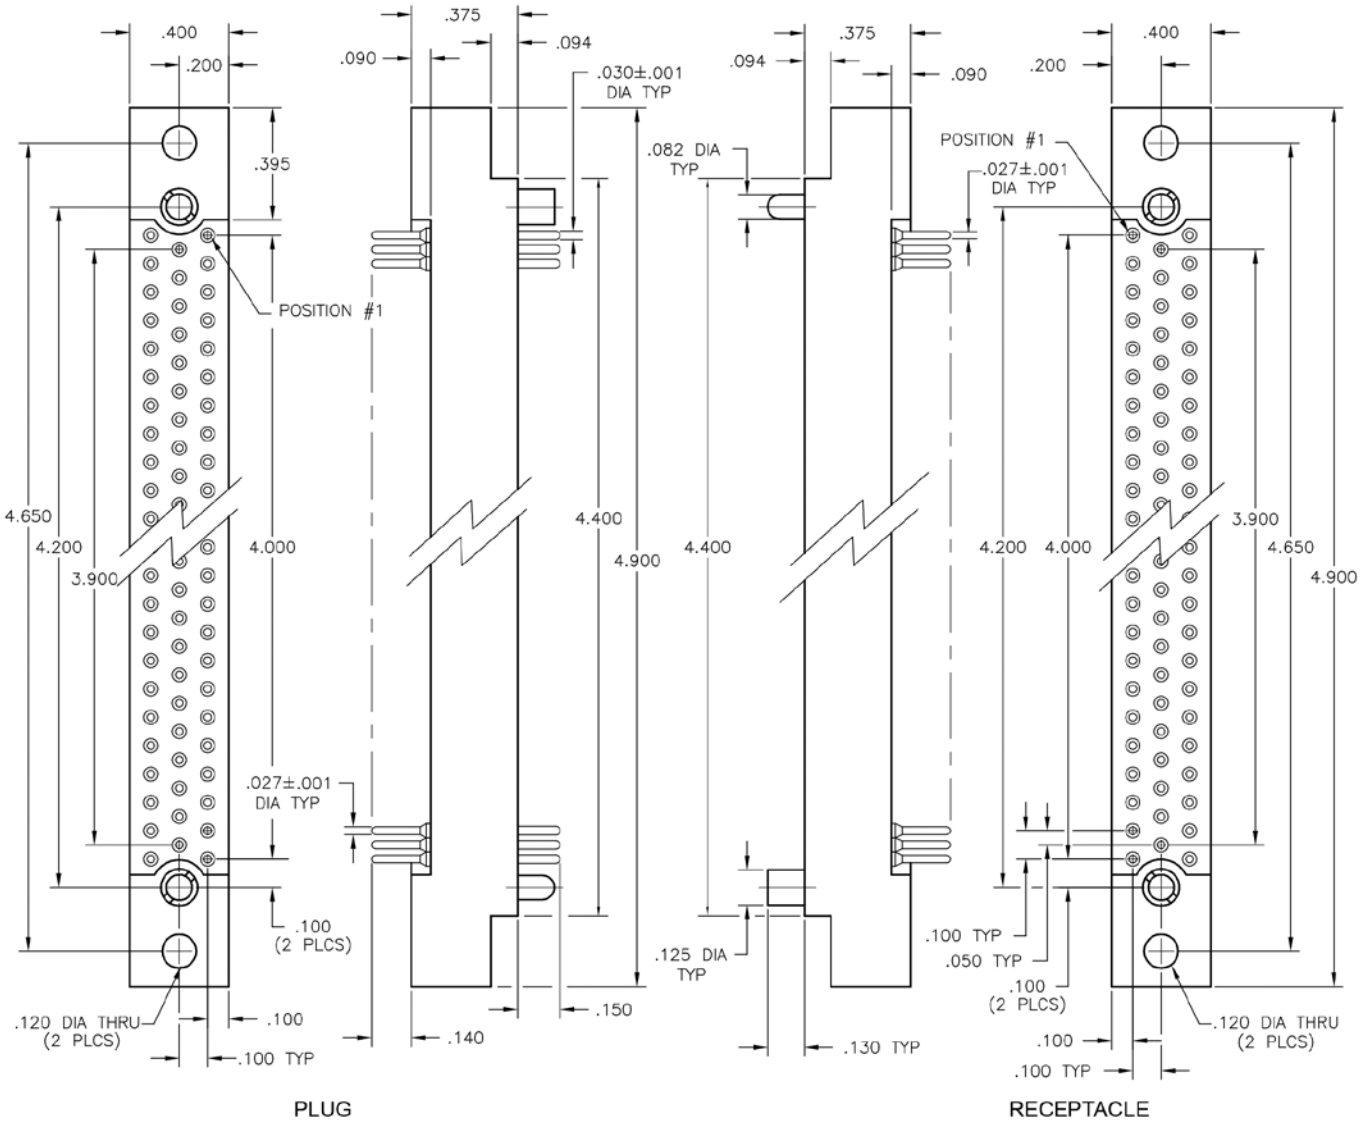

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WGAV 122 PD9 SY
RECEPTACLE: WGA 122 SAD9 SY
XXXX XXX XXXX XX

PLUG		RECEPTACLE	
SERIES			
WGAV	Plug, straight, with mounting ears	WGA	Receptacle, straight, with mounting ears
		WGA	Receptacle, right angle, with mounting ears
SIZE			
122	Number of contacts	122	Number of contacts

CONTACTS

- Pin or socket contacts can be used in either plug or receptacle.
- When pin contacts are used, standard hardware orientation places the female hardware next to the #1 pin contact.
- When socket contacts are used, standard hardware orientation places the male hardware next to the #1 socket contact.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD15	Pin, straight, dip solder, .234" x .027" dia	SAF3	Socket, straight, flex circuit, .050"
PF6	Pin, straight, flex circuit, .093"	SAF6	Socket, straight, flex circuit, .093"
		SAF9	Socket, straight, flex circuit, .140"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SAW24	Socket, straight, wire wrap®, .375"
		SAW40	Socket, straight, wire wrap®, .625"
		SOR7	Socket, right angle, dip solder, .109" x .025" dia
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
		SOR11	Socket, right angle, dip solder, .172" x .025" dia

HARDWARE

- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WGAV122PD9QJ. See "Gaskets" and "Hoods" in Accessories section for instructions.


SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
J	Fixed jackset	J	Fixed jackset
JL	Fixed jackset, long	JL	Fixed jackset, long
JT	Turning jackset, .460"	JT	Turning jackset, .460"
JTA	Turning jackset, .160"	JTA	Turning jackset, .160"
JTB	Hex turning jackset, .160"	JTB	Hex turning jackset, .160"
JTC	Hex turning jackset, .460"	JTC	Hex turning jackset, .460"
JTL	Turning jackset, long, .660"	JTL	Turning jackset, long, .660"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WGAV122PD9SY-D01. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

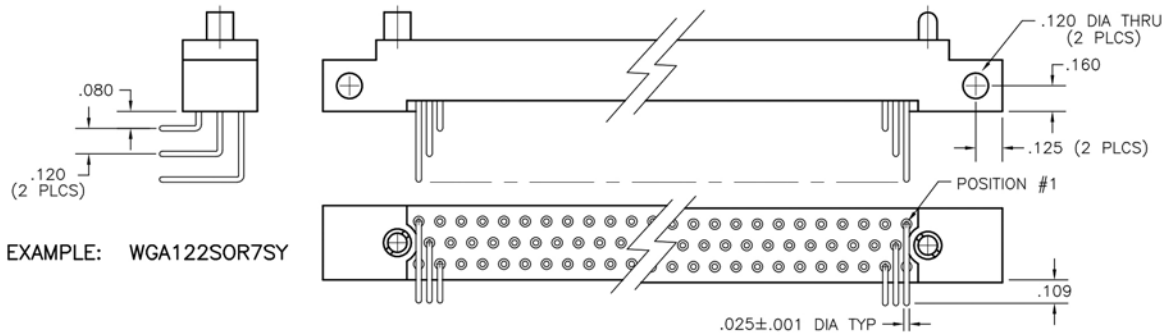



EXAMPLE: WGA122SOR7SY

Downloaded from Arrow.com.

FOUR ROW – CABLE-TO-BOARD OR PANEL


WRF - WRF
0.100" I 100 CONTACTS

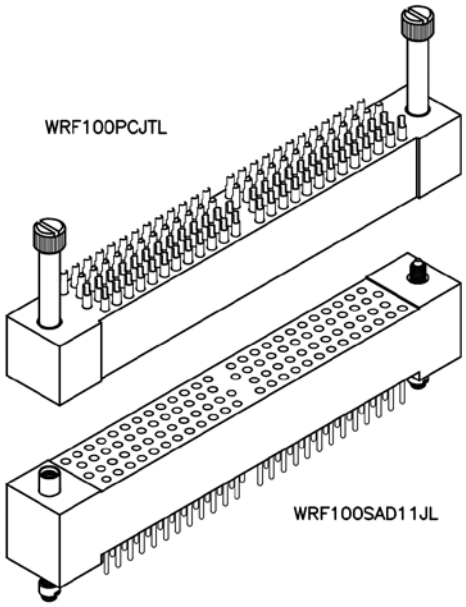

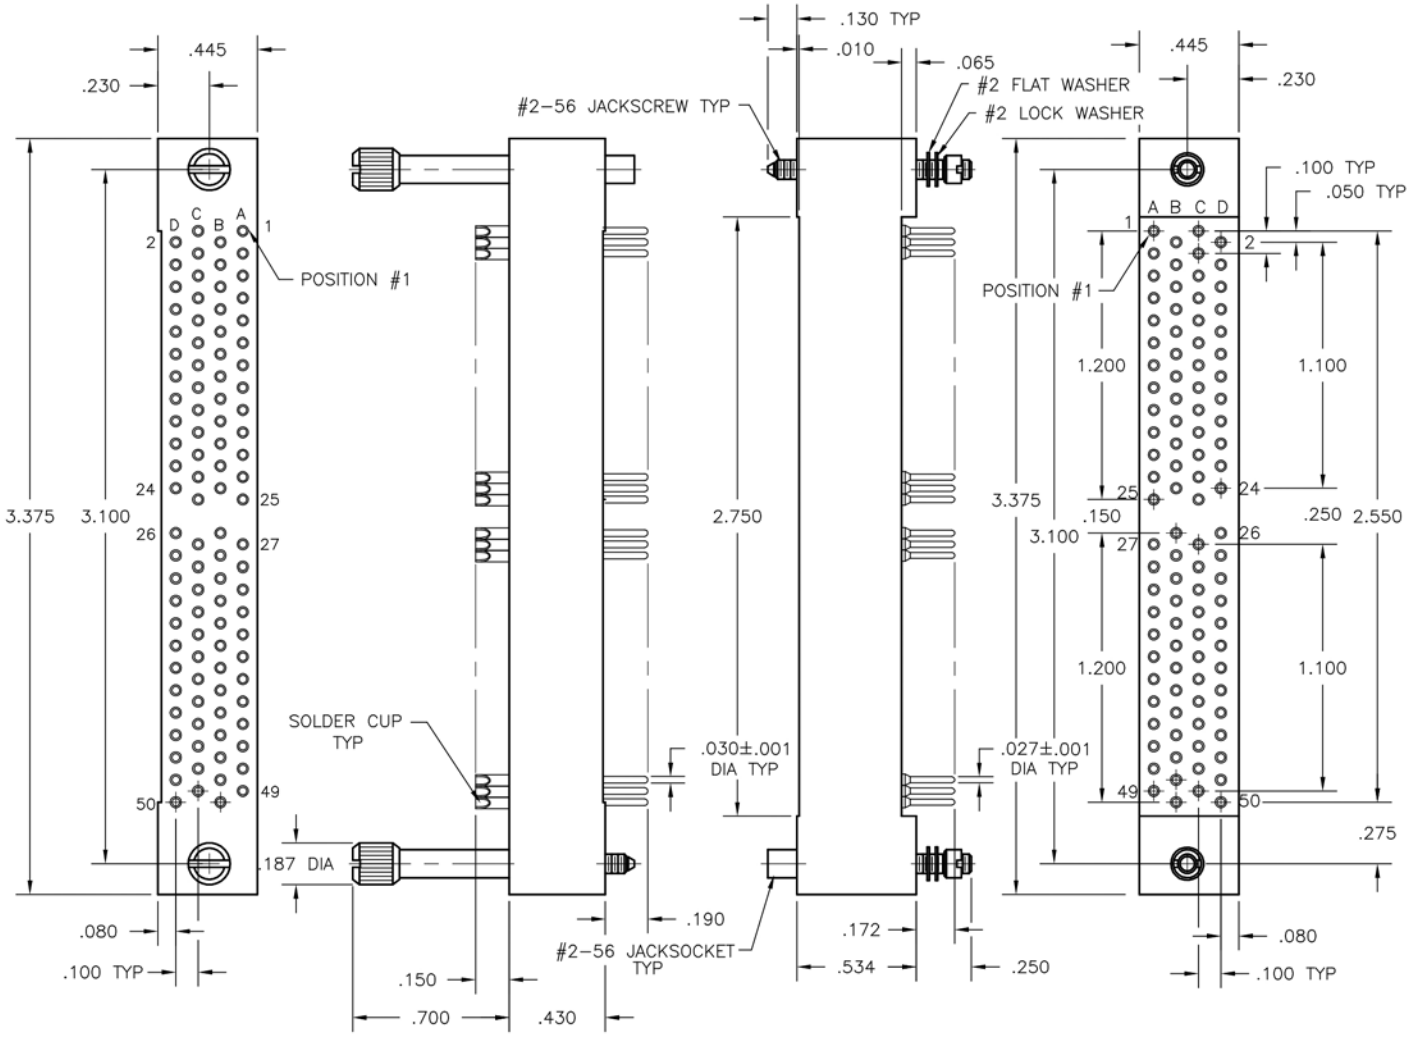

Downloaded from Arrow.com.


LEAD CONFIGURATION OPTIONS

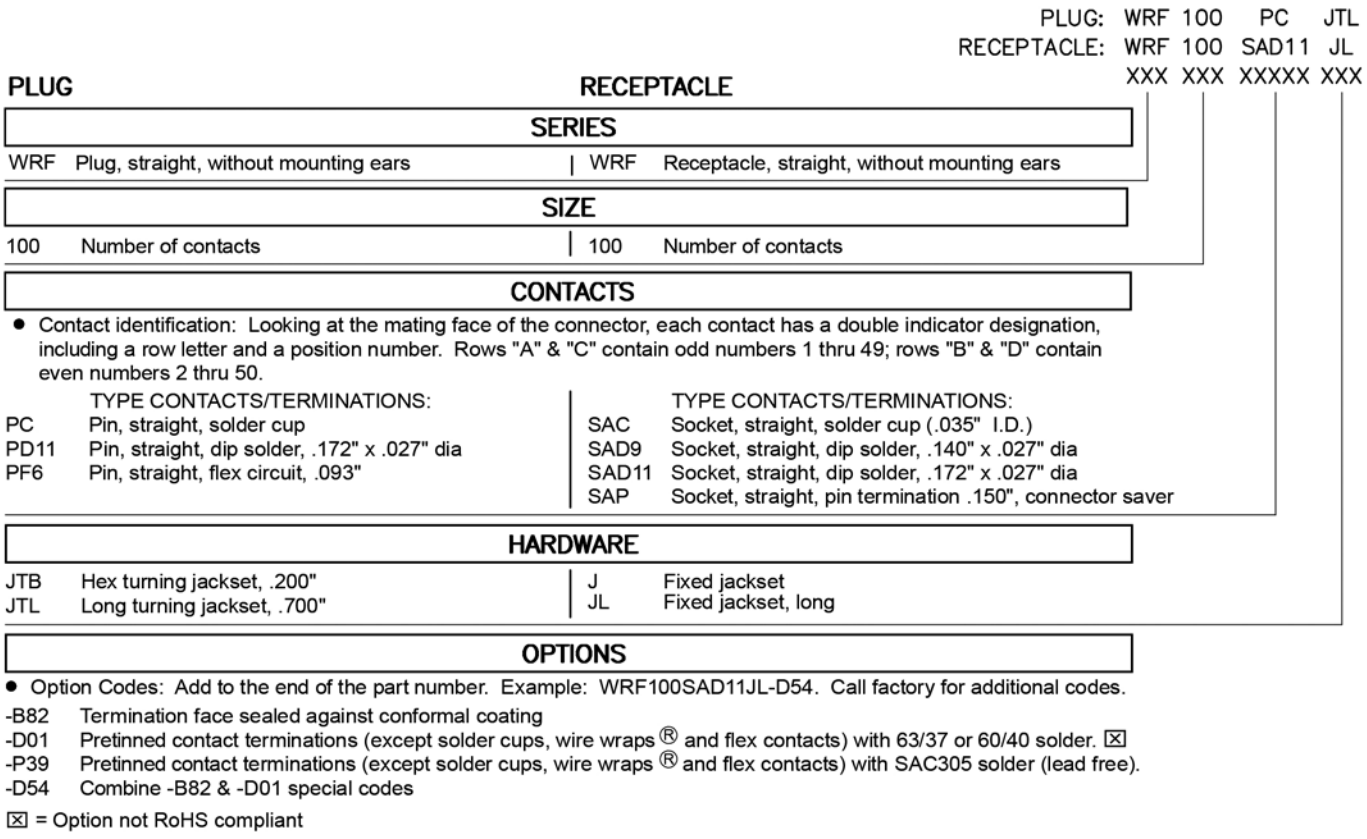


Downloaded from Arrow.com.

FOUR ROW – PC CARD-TO-BOARD OR CHASSIS


WRD - WRD
0.100" I 122 CONTACTS

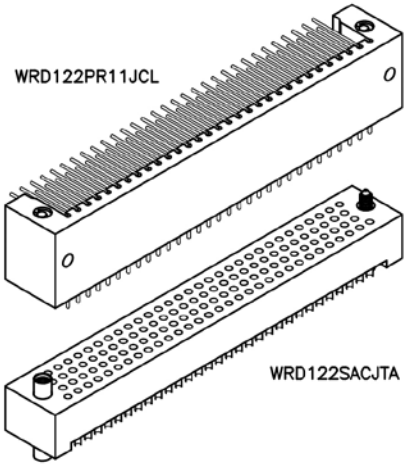

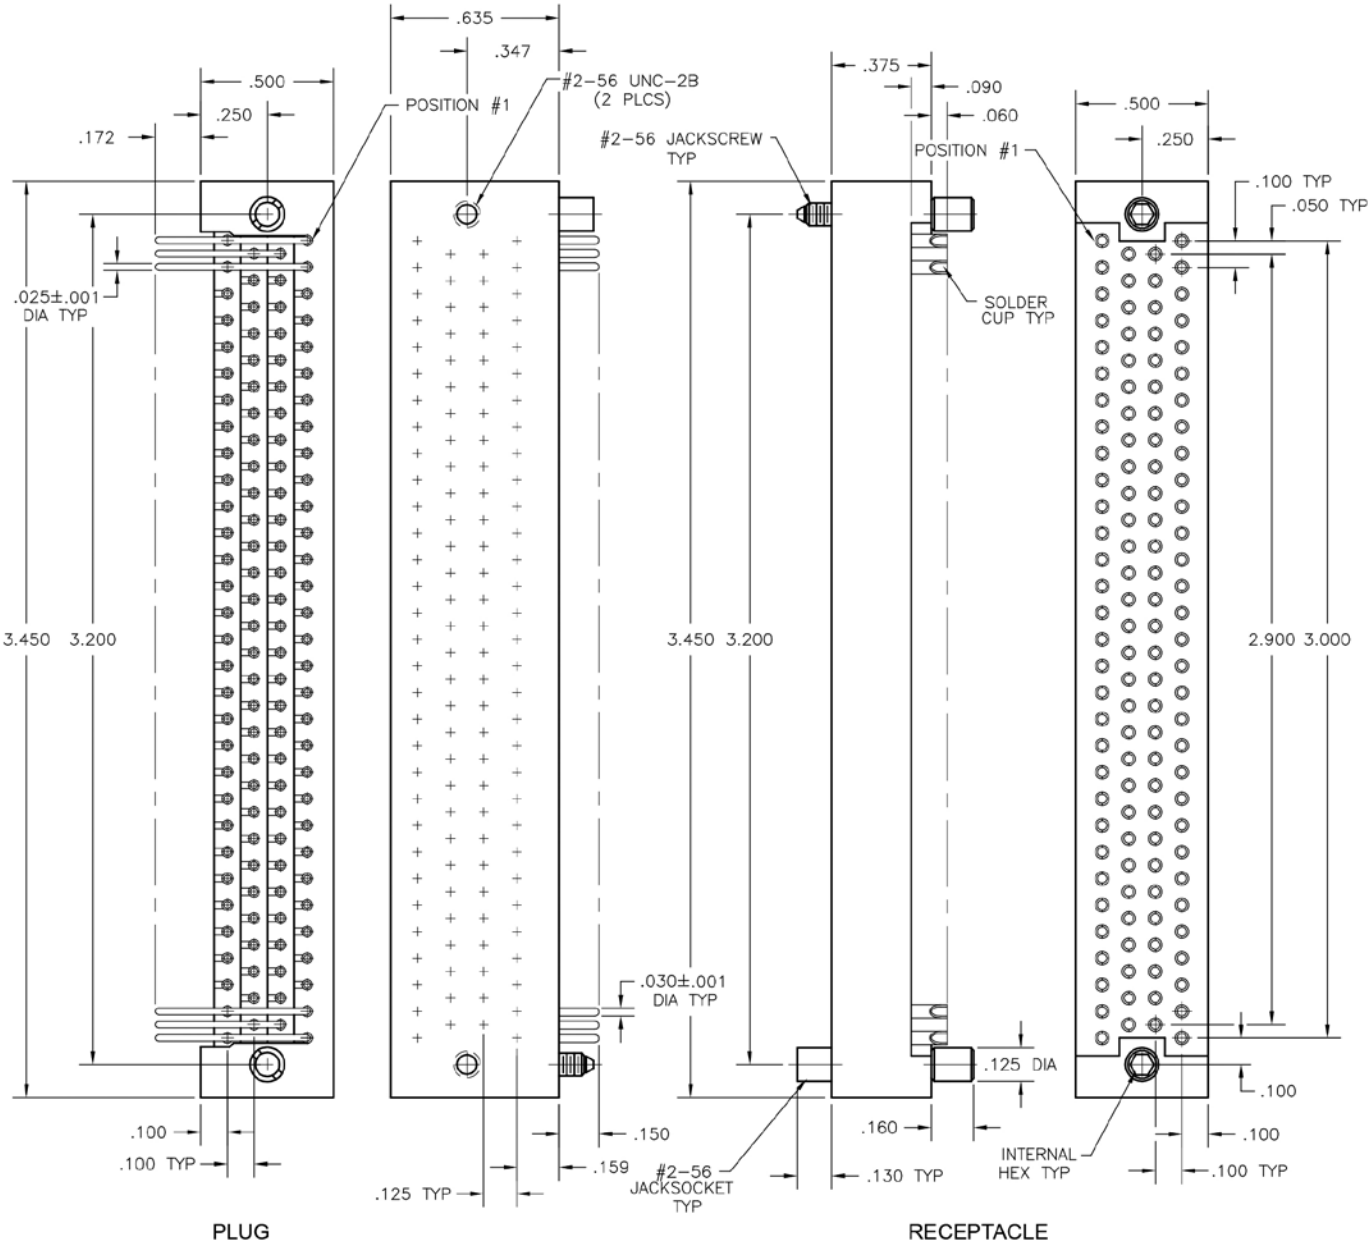

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

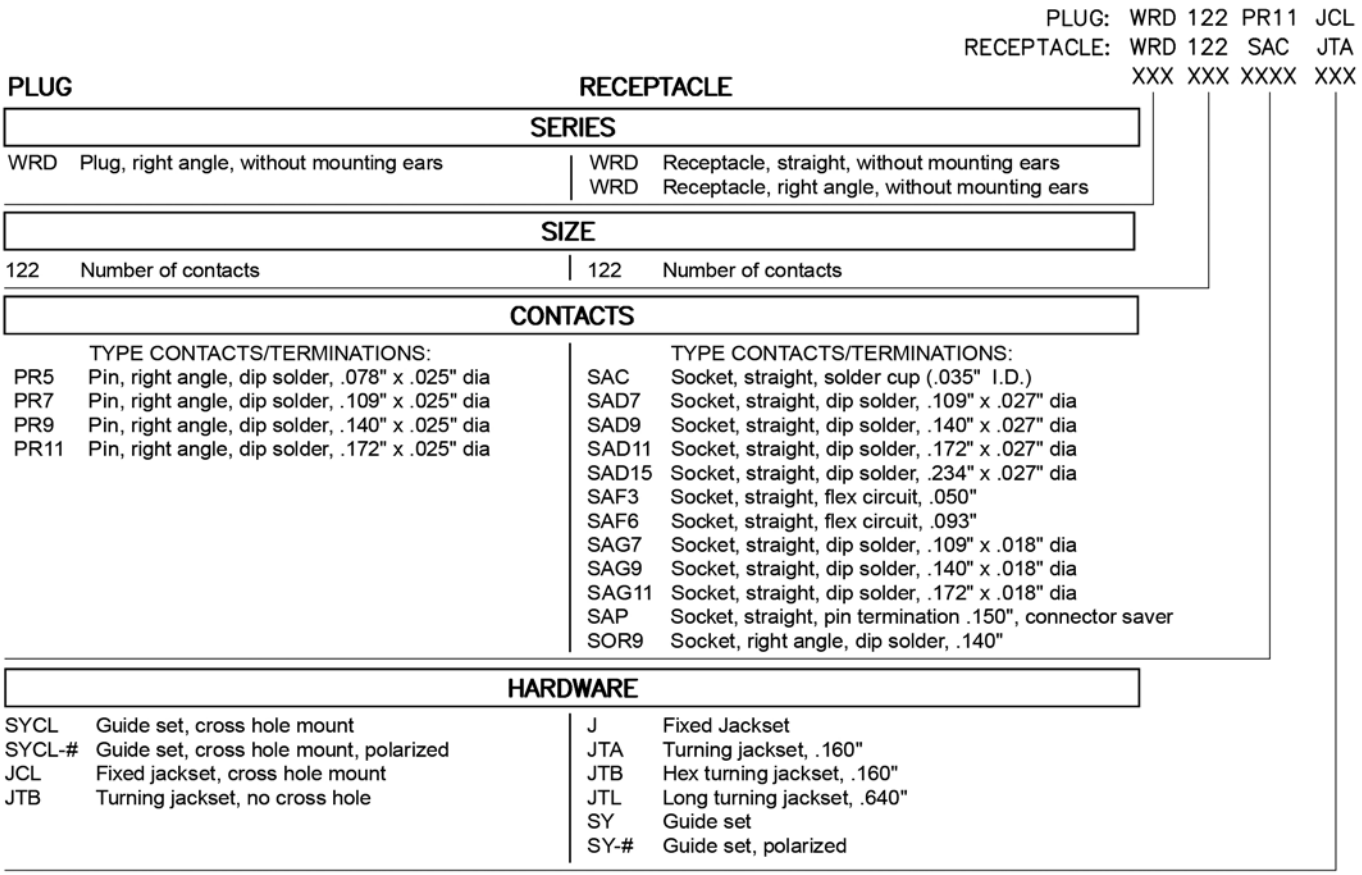

PLUG		RECEPTACLE	
SERIES			
WRD	Plug, right angle, without mounting ears	WRD	Receptacle, straight, without mounting ears
		WRD	Receptacle, right angle, without mounting ears
SIZE			
122	Number of contacts	122	Number of contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR5	Pin, right angle, dip solder, .078" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SOR9	Socket, right angle, dip solder, .140"
HARDWARE			
SYCL	Guide set, cross hole mount	J	Fixed Jackset
SYCL-#	Guide set, cross hole mount, polarized	JTA	Turning jackset, .160"
JCL	Fixed jackset, cross hole mount	JTB	Hex turning jackset, .160"
JTB	Turning jackset, no cross hole	JTL	Long turning jackset, .640"
		SY	Guide set
		SY-#	Guide set, polarized

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRD122SAD9SY-D54. Call factory for additional codes.


-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 special codes


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

FOUR ROW – SANDWICH BOARDS

WRDV - WRD
0.100" I 122 CONTACTS

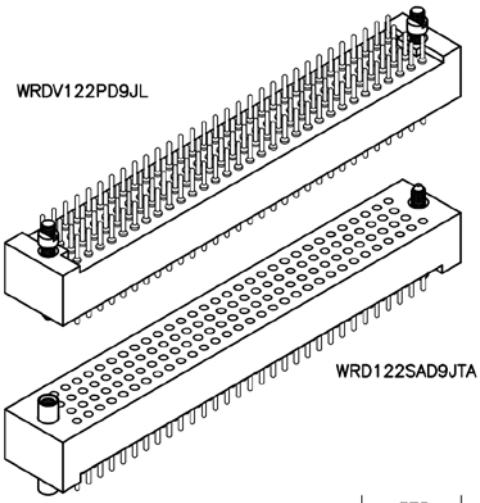

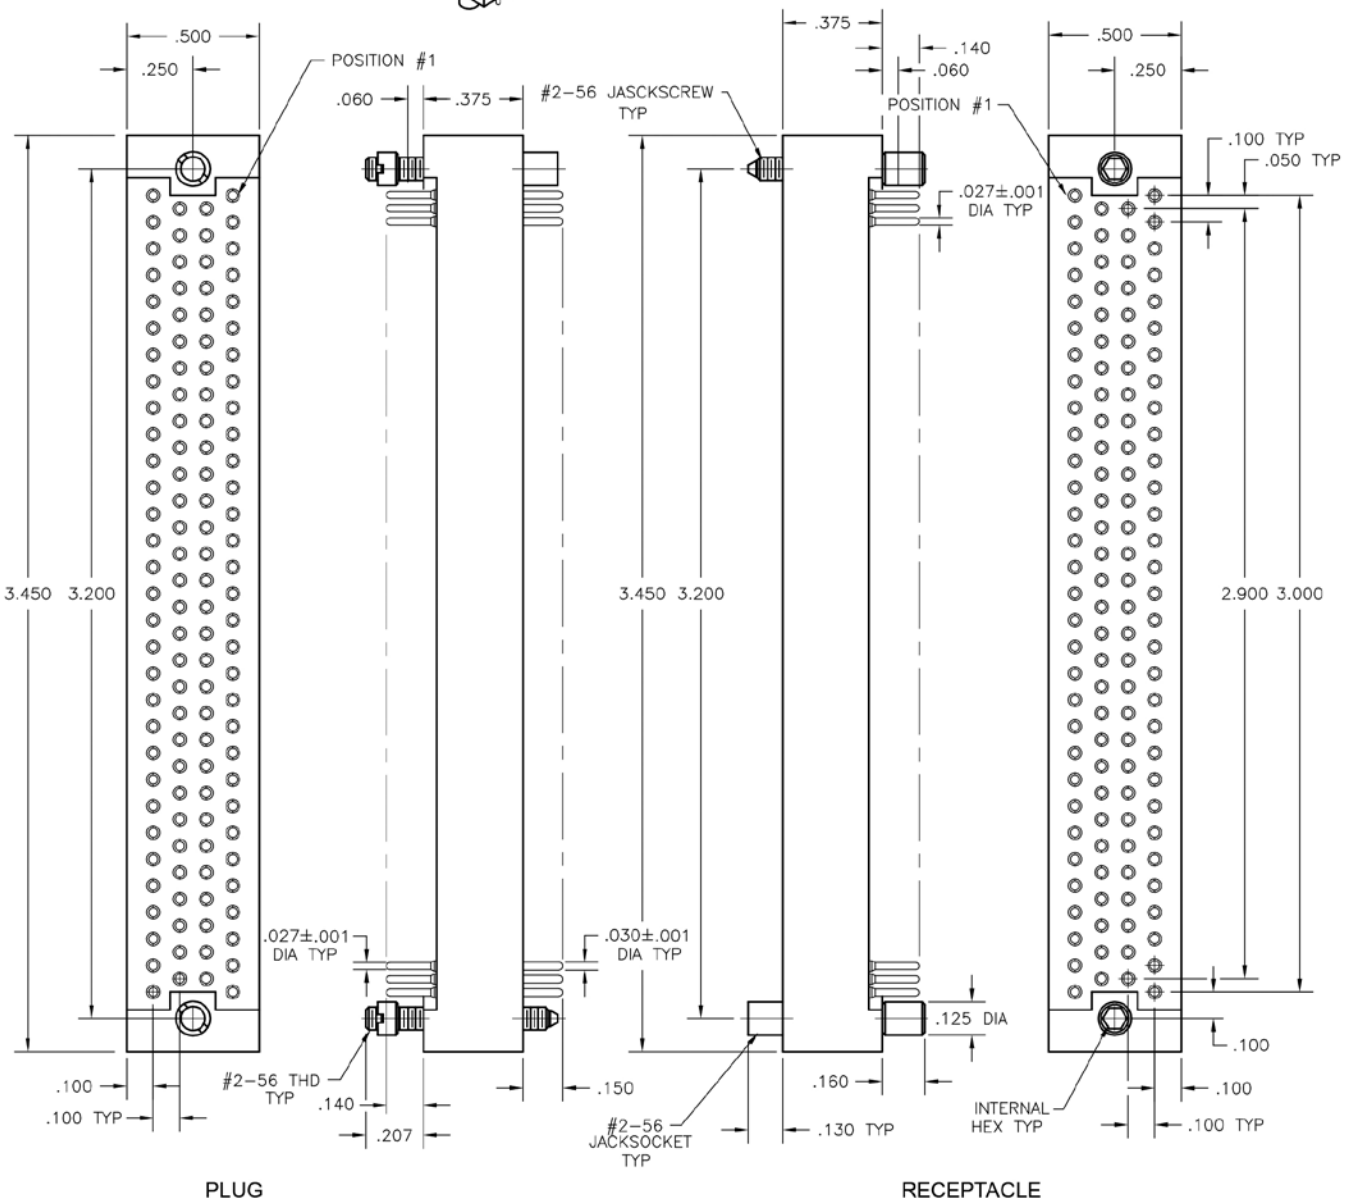

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WRDV 122 PD9 JL
RECEPTACLE: WRD 122 SAD9 JTA
XXXX XXX XXXX XXX


PLUG		RECEPTACLE	
SERIES			
WRDV	Plug, straight, without mounting ears	WRD	Receptacle, straight, without mounting ears
		WRD	Receptacle, right angle, without mounting ears
SIZE			
122	Number of contacts	122	Number of contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PC	Pin, straight, solder cup (.035" I.D.)	SAC	Socket, straight, solder cup (.035" I.D.)
PD7	Pin, straight, dip solder, .109" x .027" dia	SAD7	Socket, straight, dip solder, .109" x .027" dia
PD9	Pin, straight, dip solder, .140" x .027" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PD11	Pin, straight, dip solder, .172" x .027" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
PD15	Pin, straight, dip solder, .234" x .027" dia	SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAF3	Socket, straight, flex circuit, .050"
		SAF6	Socket, straight, flex circuit, .093"
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
		SAP	Socket, straight, pin termination .150", connector saver
		SOR9	Socket, right angle, dip solder, .140" x .025" dia
HARDWARE			
J	Fixed jackset	J	Fixed jackset
JL	Fixed jackset, long	JL	Fixed jackset, long
JTA	Turning jackset, .160"	JTA	Turning jackset, .160"
JTB	Hex turning jackset, .160"	JTB	Hex turning jackset, .160"
JTL	Long turning jackset, .660"	JTL	Long turning jackset, .660"
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRD122SAD9SY-D01. Call factory for additional codes.

-B82 Termination face sealed against conformal coating
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).
-D54 Combine -B82 & -D01 special codes

☒ = Option not RoHS compliant

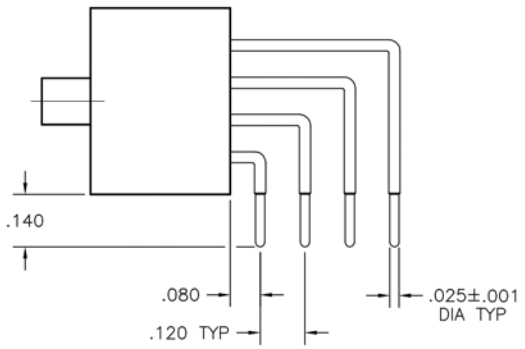



EXAMPLE: WRD122SOR9J

Downloaded from Arrow.com.

FOUR ROW – PC CARD-TO-CABLE

WRD - WDDXA
0.100" I 122 CONTACTS

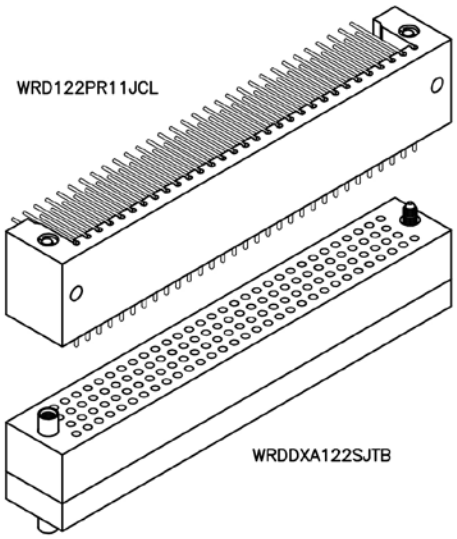

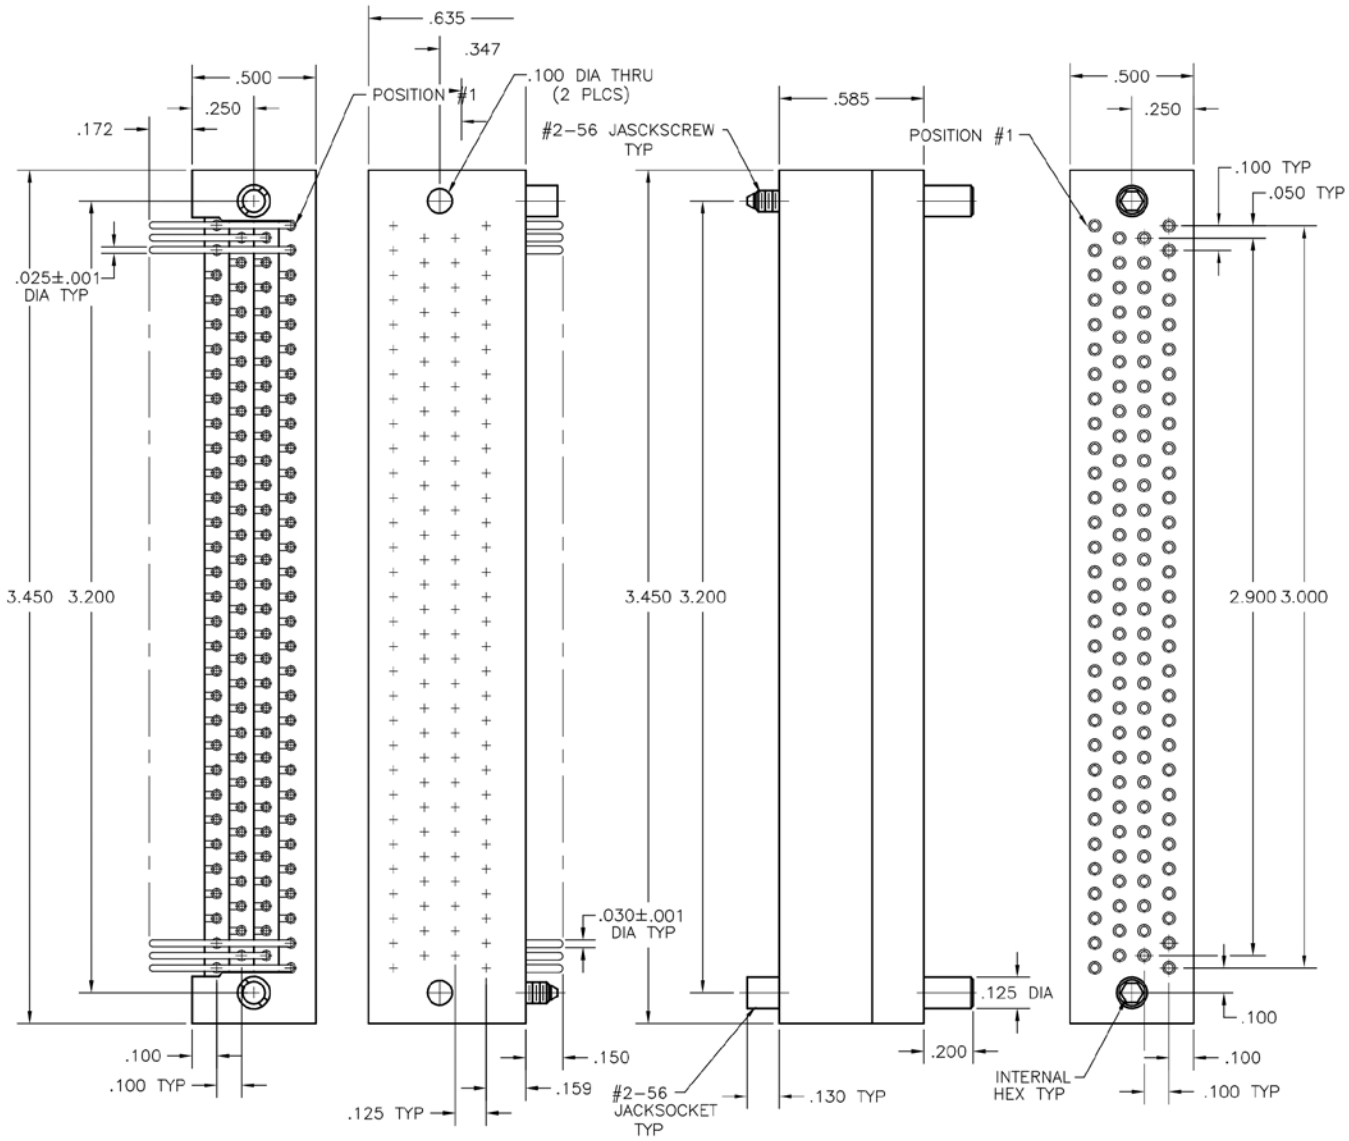

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WRD 122 PR11 JCL
RECEPTACLE: WRDDXA 122 S JTB
XXXXX XX XXX XX

PLUG	RECEPTACLE

SERIES

WRD Plug, right angle, without mounting ears	WRDDXA Receptacle, straight, crimp removable, without mounting ears

- WRDDXA mates with WRD and WRDV connectors. "A" means contacts are included.

SIZE

122 Number of contacts	122 Number of contacts

CONTACTS

- The use of gaskets is not recommended with crimp socket contacts.
- WRDDXA** includes full complement of WTK2222 (S or PA) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.
- When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
PR7	Pin, right angle, dip solder, .109" x .025" dia	S	Socket, straight, crimp removable, 22 AWG
PR9	Pin, right angle, dip solder, .140" x .025" dia	SA	Same as above
PR11	Pin, right angle, dip solder, .172" x .025" dia	P	Pin, straight, crimp removable, 22 AWG


HARDWARE

JCL	Fixed jackset, cross hole mount	SY	Guide set
SYCL	Guide set, cross hole mount	SY-#	Guide set, polarized
SYCL-#	Guide set, cross hole mount, polarized	JTA	Turning jackset, .200"
		JTB	Hex turning jackset, .200"
		JTL	Long turning jackset, .700"

OPTIONS

- Option Codes: Add to the end of the part number. Example: WRDDXA122SSY-C45. Call factory for additional codes.

-A53 Socket, straight, crimp removable, 20 AWG
-C45 Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

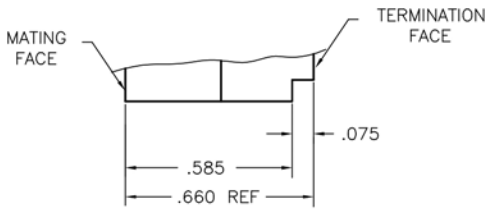



DETAIL A

Downloaded from Arrow.com.

TWO ROW – COAX CONNECTORS - PC CARD-TO-BOARD OR CHASSIS

WTB - WTB
0.100" **I** 20-3 CONTACTS

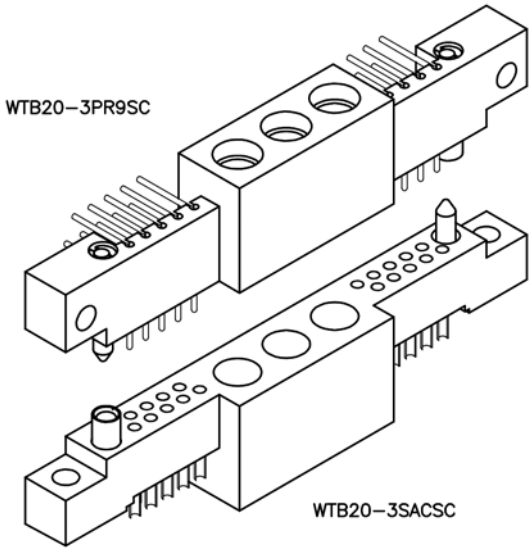

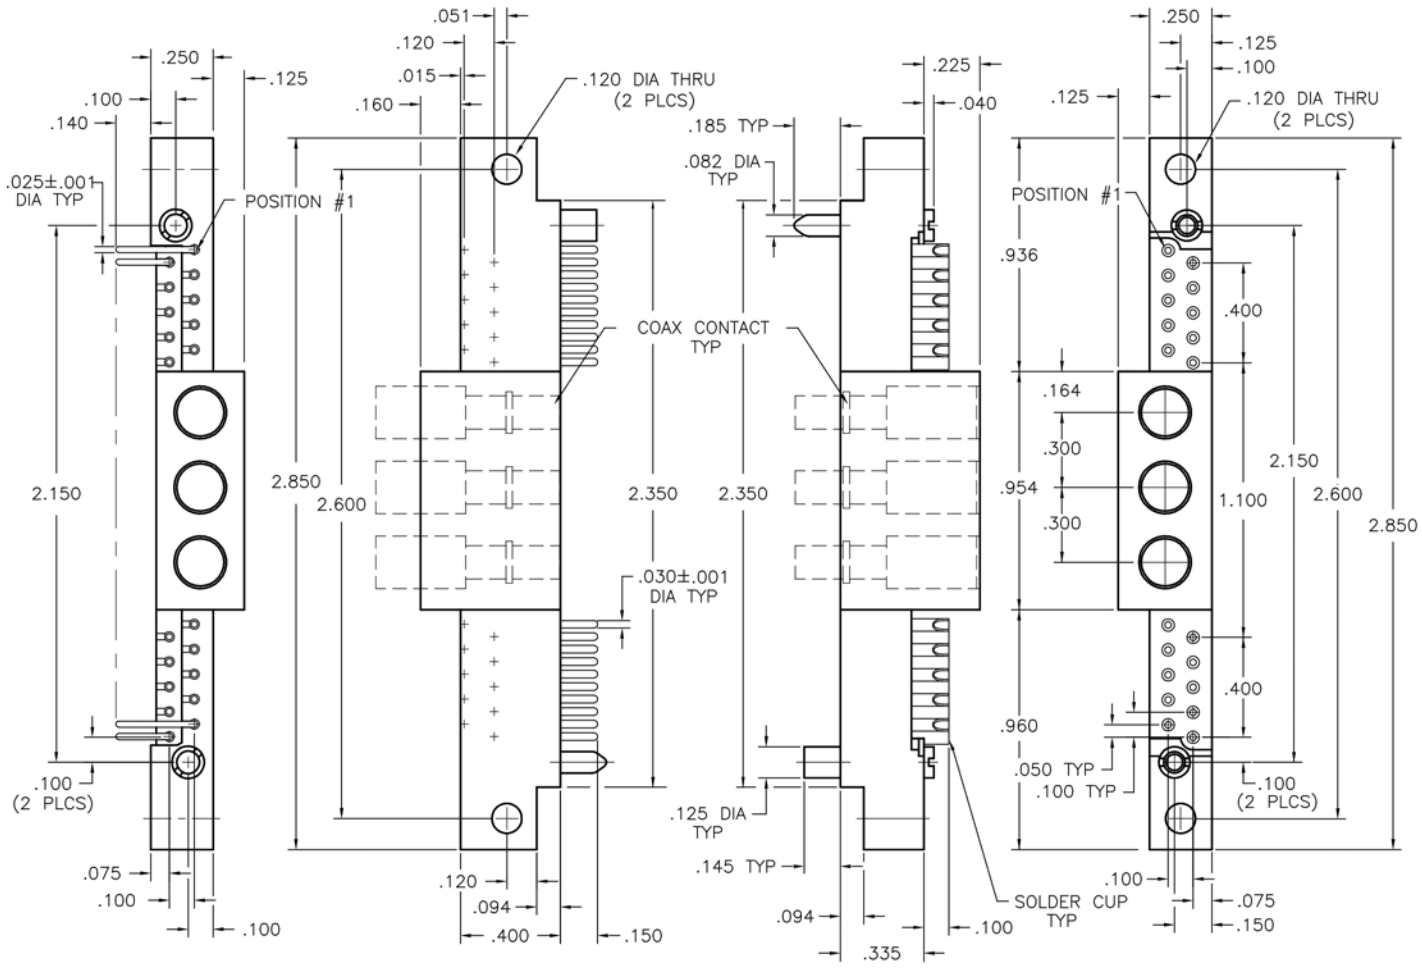

PLUG RECEPTACLE

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WTB 20–3 PR9 SC
RECEPTACLE: WTB 20–3 SAC SC
XXX XXXX XXX XX

PLUG		RECEPTACLE	
SERIES			
WTB	Plug, right angle, with mounting ears	WTB	Receptacle, straight, with mounting ears
SIZE			
20-3	20 right angle signal pins, plus 3 straight or right angle removable coax sockets	20-3	20 straight signal pins, plus 3 straight removable coax pins
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
HARDWARE			
SC	Guide set	SC	Guide set
SC-#	Guide set, polarized	SC-#	Guide set, polarized

OPTIONS

- Molded insulator: Diallyl Phathalate per ASTM-D5948 (GDI-30F or SDG-F)
- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts: WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)

- Option Codes: Add to the end of the part number. Example: WTB20-3SAD11SC-C34. Call factory for additional codes.


-342 Remove mounting ears. (.250" each end)
-C34 Remove .225" standoff so connector is flush to board (receptacle only).
-G69 Solder cups are fixed in an outward orientation, otherwise contacts can rotate.
-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).


☒ = Option not RoHS compliant

Downloaded from Arrow.com.

TWO ROW – COAX CONNECTORS - PC CARD-TO-BOARD OR CHASSIS


WTB - WTB
0.100" **I** 20-6 CONTACTS

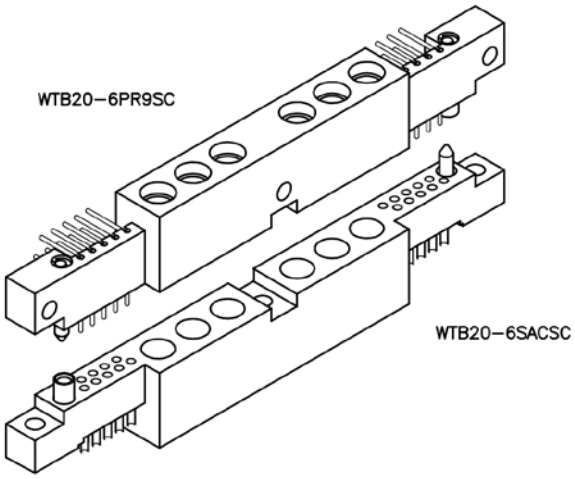

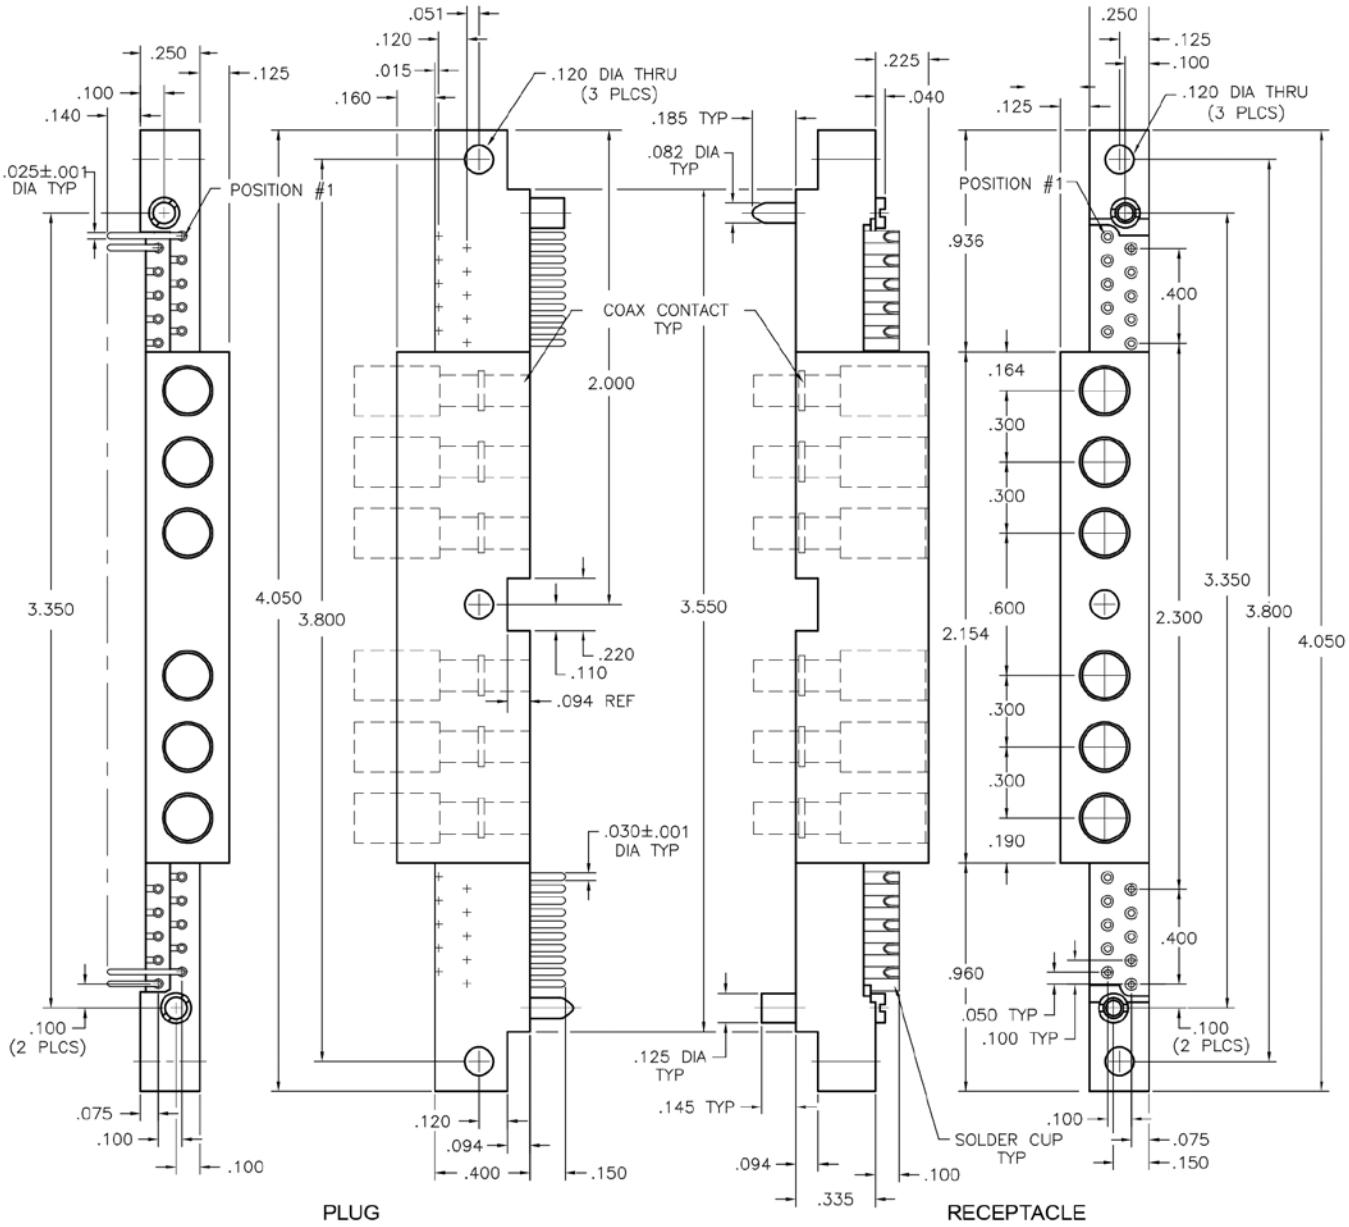

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

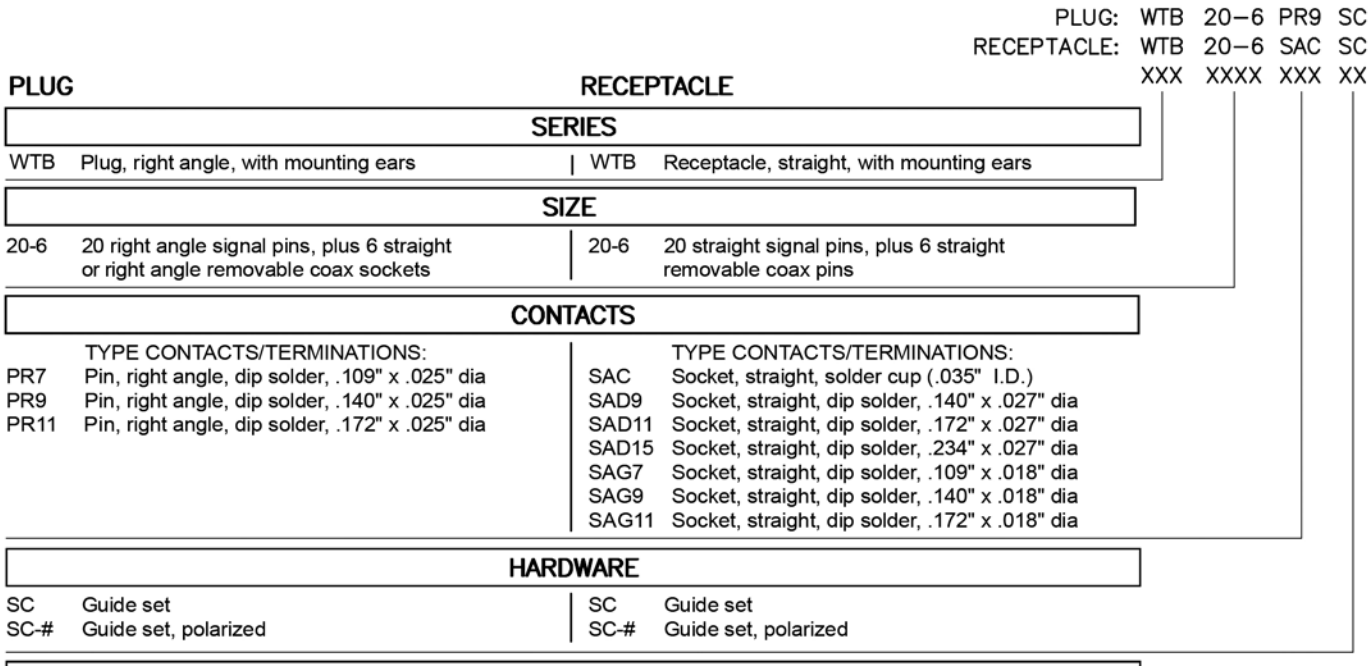

- Molded insulator: Diallyl Phathalate per ASTM-D5948 (GDI-30F or SDG-F)
- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts: WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)

- Option Codes: Add to the end of the part number. Example: WTB20-6SAD9SC342. Call factory for additional codes.


-342 Remove mounting ears. (.250" each end)
-C34 Remove .225" standoff so connector is flush to board (receptacle only).
-G69 Solder cups are fixed in an outward orientation, otherwise contacts can rotate.
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).


☒ = Option not RoHS compliant


Downloaded from Arrow.com.

THREE ROW – COAX CONNECTORS - PC CARD-TO-CHASSIS OR BOARD

WG - WG
0.100" I 47-1 CONTACTS

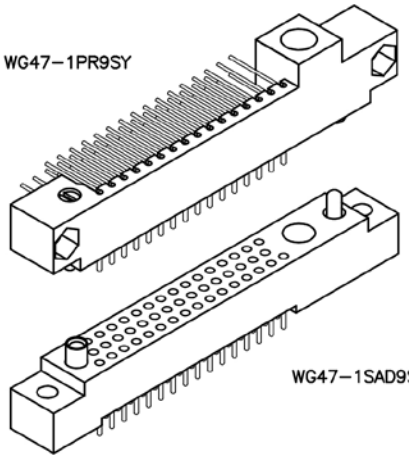

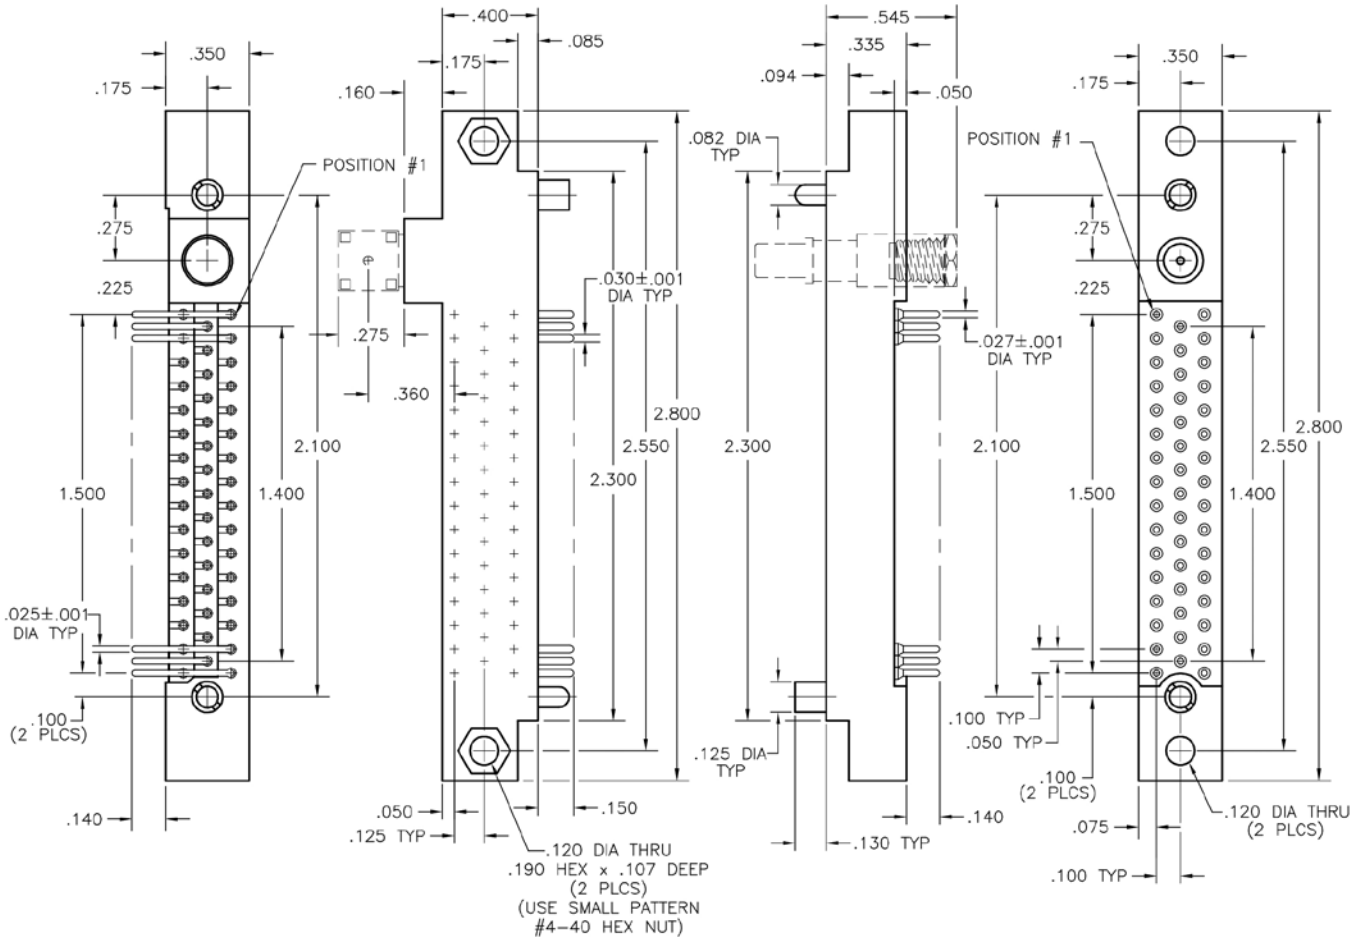

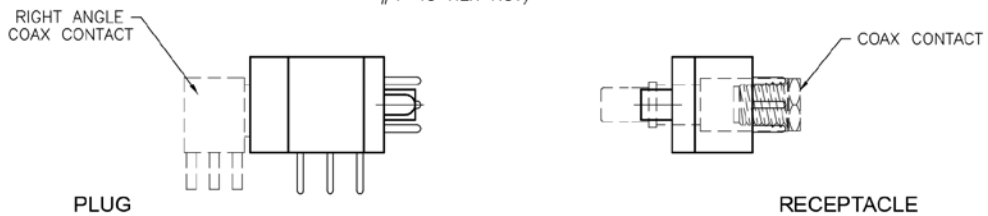

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WG 47–1 PR11 SY
RECEPTACLE: WG 47–1 SAD9 SY
XX 47–1 XXXX XX


PLUG		RECEPTACLE	
SERIES			
WG	Plug, right angle, with mounting ears	WG	Receptacle, straight, with mounting ears
SIZE			
47-1	47 right angle signal pins, plus 1 right angle or straight removable coax socket	47-1	47 straight signal pins, plus 1 straight removable coax pin
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
PR7	Pin, right angle, dip solder, .109" x .025" dia	SAC	Socket, straight, solder cup (.035" I.D.)
PR9	Pin, right angle, dip solder, .140" x .025" dia	SAD9	Socket, straight, dip solder, .140" x .027" dia
PR11	Pin, right angle, dip solder, .172" x .025" dia	SAD11	Socket, straight, dip solder, .172" x .027" dia
		SAD15	Socket, straight, dip solder, .234" x .027" dia
		SAG7	Socket, straight, dip solder, .109" x .018" dia
		SAG9	Socket, straight, dip solder, .140" x .018" dia
		SAG11	Socket, straight, dip solder, .172" x .018" dia
HARDWARE			
SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized

OPTIONS


- Molded insulator (plug only): Diallyl Phathalate per ASTM-D5948 (GDI-30F or SDG-F)
- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts: WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)
- Option Codes: Add to the end of the part number. Example: WG47-1SACSY-C34. Call factory for additional codes.

-342 Remove mounting ears. (.250" each end)
-548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
-C34 Remove .225" standoff so connector is flush to board (receptacle only).
-G69 Solder cups are fixed in an outward orientation, otherwise contacts can rotate.
-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC 305 solder (lead free).


☒ = Option not RoHS compliant

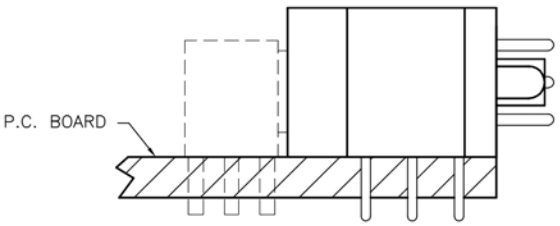

WG47-1PR9SY
P.C. BOARD EXAMPLE



WG47-1SAD9SY
MOTHERBOARD EXAMPLE

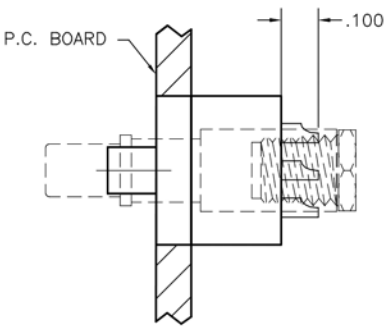



WG47-1SACSY
CHASSIS EXAMPLE

Downloaded from Arrow.com.

ONE ROW – COAX CONNECTORS - PC CARD-TO-CHASSIS

WRBC - WRBC
0.300" I 1, 7 AND 11 CONTACTS

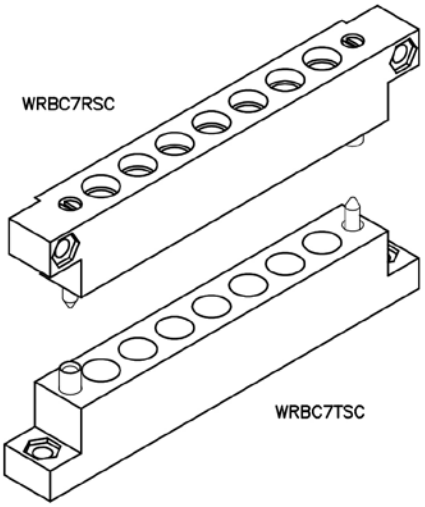

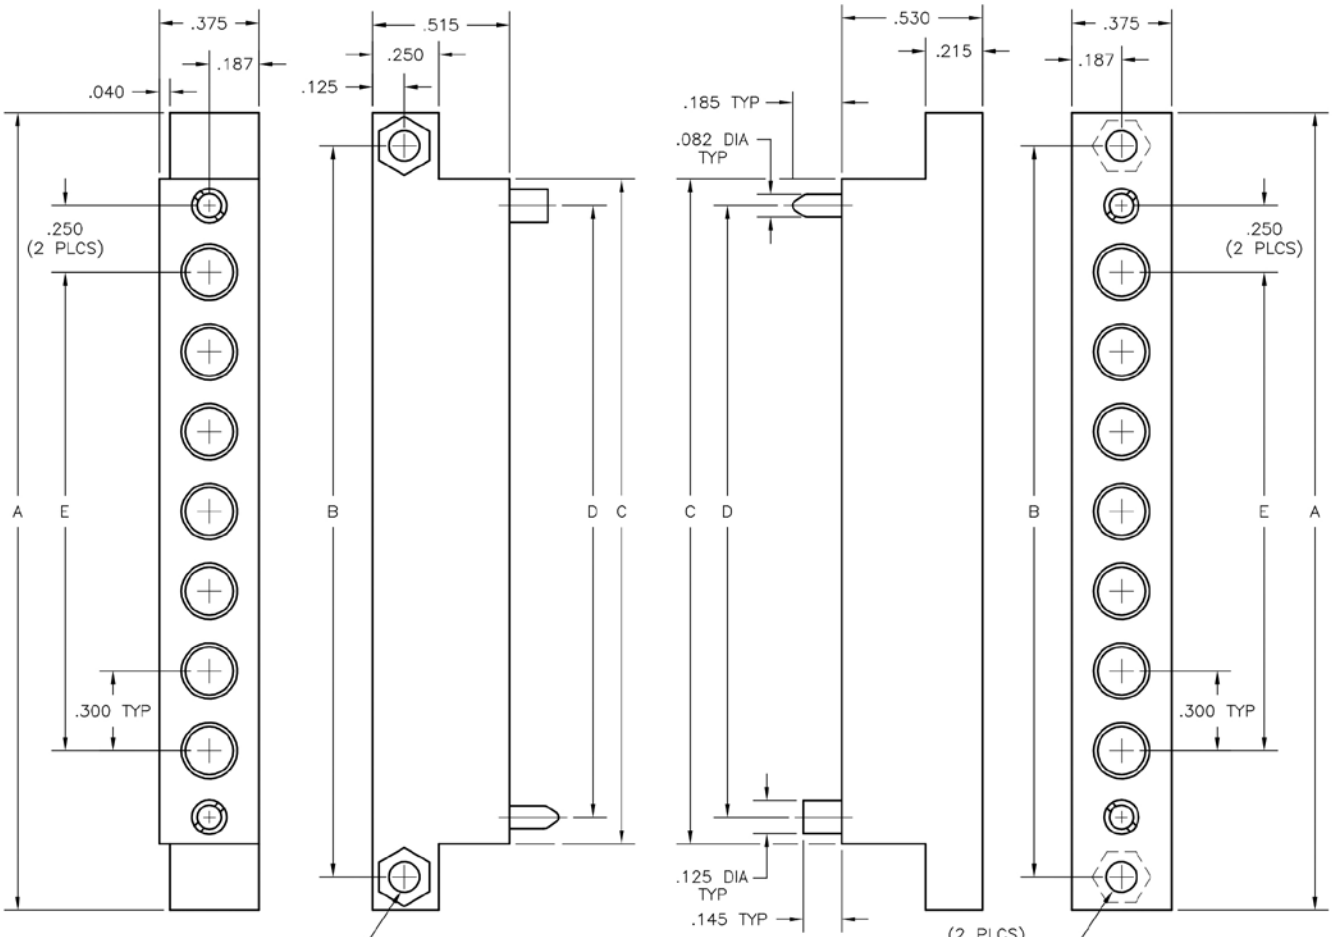

DIMENSIONS					
SIZE	A	B	C	D	E
1*	.875	.625	.375	—	—
7	3.000	2.750	2.500	2.300	1.800
11	4.200	3.950	3.700	3.500	3.000

* = SEE OPPOSITE PAGE FOR 1 POSITION CONFIGURATION

Downloaded from Arrow.com.


LEAD CONFIGURATION OPTIONS

PLUG:	WRBC	7	R	SC
RECEPTACLE:	WRBC	7	T	SC
	XXXX	XX	X	XX


PLUG	RECEPTACLE
SERIES	
WRBC Plug, right angle, with mounting ears	WRBC Receptacle, straight, with mounting ears
SIZE	
XX Number of coax contacts (1, 7 or 11)	XX Number of coax contacts (1, 7 or 11)
CONTACTS	
R TYPE CONTACTS/TERMINATIONS: Sockets, straight or right angle, removable coax contacts	T TYPE CONTACTS/TERMINATIONS: Pins, straight, removable coax contacts
HARDWARE	
SC Guide set SC-# Guide set, polarized	SC Guide set SC-# Guide set, polarized

OPTIONS


- Removable type coax contacts sold separately. See "Coax Contacts" in Accessories section for instructions.
- Coax Contacts: WTC188P = straight pin (to be installed in receptacle insulator only)
  WTC196P = straight pin (to be installed in receptacle insulator only)
  WTC085P = straight pin (to be installed in receptacle insulator only)
  WTC188S = straight socket (to be installed in plug insulator only)
  WTC196S = straight socket (to be installed in plug insulator only)
  WTC085S = straight socket (to be installed in plug insulator only)
  WTC10SRD9 = right angle socket (to be installed in plug insulator only)

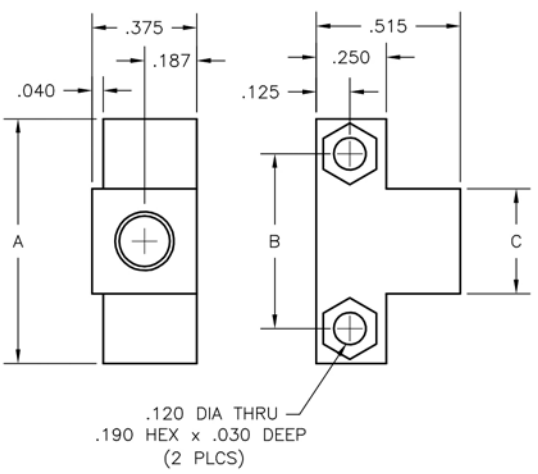


WRBC1R

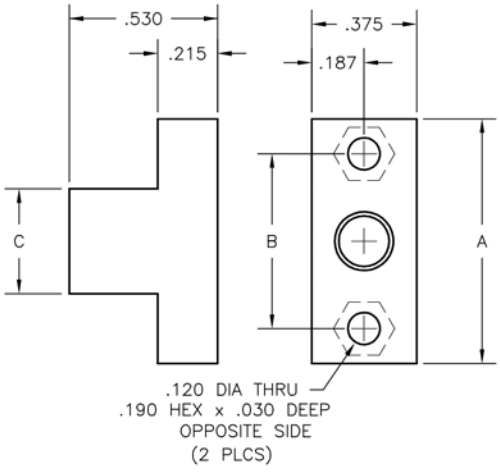

WRBC1T

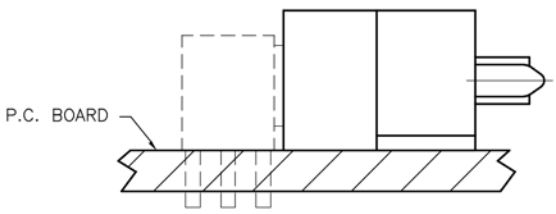

WRBC7RSC
P.C. BOARD EXAMPLE

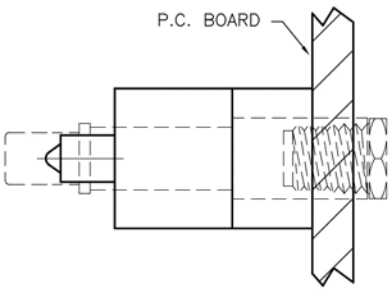



WRBC7TSC
MOTHERBOARD EXAMPLE

Downloaded from Arrow.com.

MISCELLANEOUS CONNECTORS – POWER CABLE-TO-CHASSIS

PA - PA
0.225" **I** 5 AND 4-5 CONTACTS

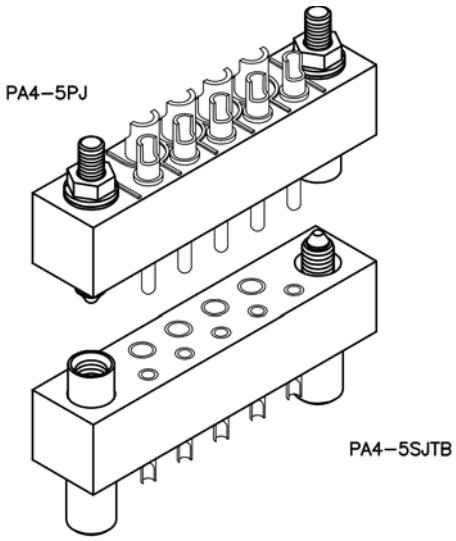

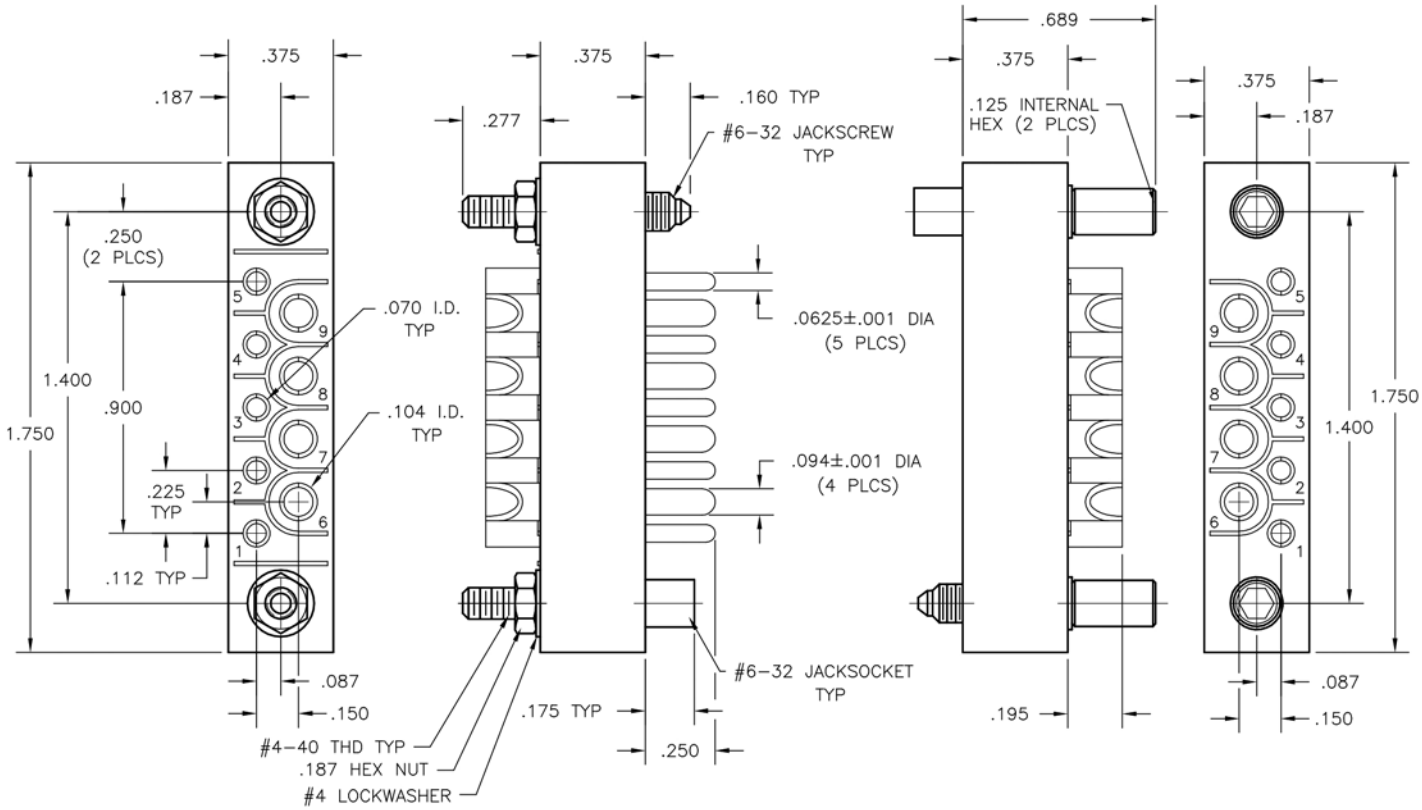

SEE OPPOSITE PAGE FOR 5 POSITION CONFIGURATION.
SEE PAGE W-86 & W-87 FOR 10 POSITION CONFIGURATION.

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	PA	4–5	S	JTB
RECEPTACLE:	PA	4–5	P	J
	XX	XXX	X	XXX

PLUG		RECEPTACLE	
SERIES			
PA	Power connectors	PA	Power connectors
SIZE			
5	5 #12 contacts	5	5 #12 contacts
4-5	4 #12 contacts & 5 #16 contacts	4-5	4 #12 contacts & 5 #16 contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, solder cup	S	Socket, straight, solder cup
PD11	Pin, straight, dip solder, .172" x .062" dia	SD11	Socket, straight, dip solder, .172" x .062" dia
HARDWARE			
SY	Guide set	SY	Guide set
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, 1.054"	JT	Turning jackset, 1.054"
JTB	Hex turning jackset, .314"	JTB	Hex turning jackset, .314"
JTL	Long turning jackset, 1.175"	JTL	Long turning jackset, 1.175"


OPTIONS

- Hood (PA5H) for use with PA5 and PA4-5 connectors. Specify JTL hardware when using hood.
- For hood strain relief, add "H" to "JTL" hardware. Example: PA5SJTLH.
- Option Codes: Add to the end of the part number. Example: PA5PD11SY-P39. Call factory for additional codes.


-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant

NOTES:
Molded bodies: Diallyl phthalate per ASTM-D5948 (GDI-30F or SDG-F)
Contact rating: #12 contacts = 23 amps
#16 contacts = 13 amps
Contact material: Socket - Beryllium copper, gold plated
Pin - Brass gold plated
Contact plating: Nominal Au plating thickness is 20 microinches on mating surfaces
Test voltage: 2000 VRMS @ sea level; 460 VRMS @ 70,000 feet
Contact resistance: #12 contacts=.023 volt maximum drop @ 23 amps (.001 ohms)
#16 contacts=.023 volt maximum drop @ 13 amps (.002 ohms)
Engagement force: 24 ounces maximum average per contact

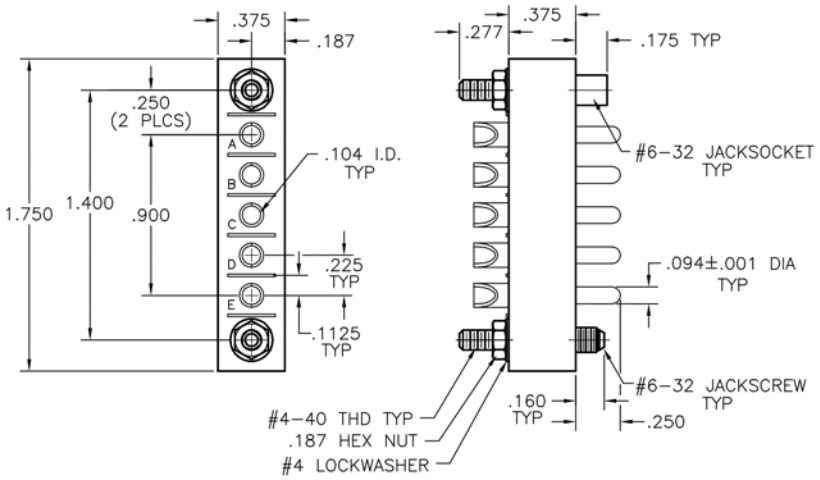

PLUG
EXAMPLE: PA5PJ

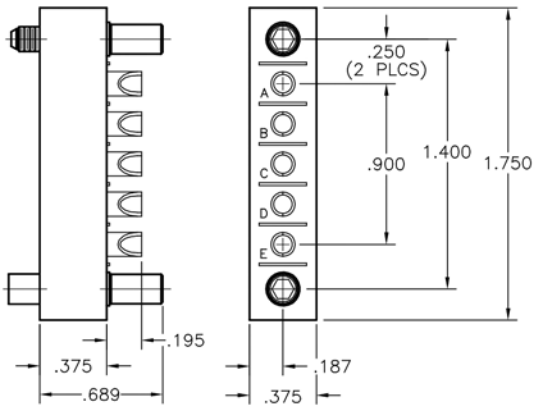



RECEPTACLE
EXAMPLE: PA5SJTB

Downloaded from Arrow.com.

MISCELLANEOUS CONNECTORS – POWER CABLE-TO-CHASSIS

PA - PA
0.225" I 10 CONTACTS

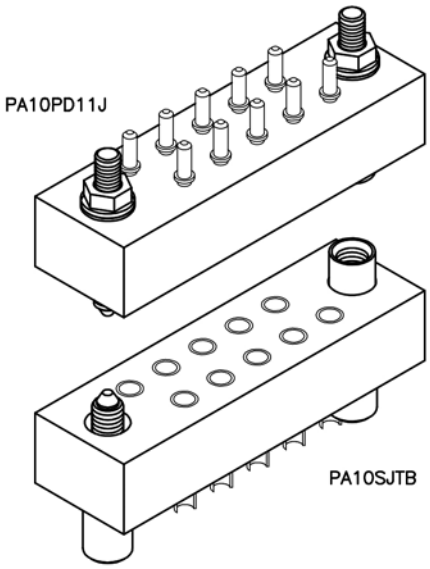

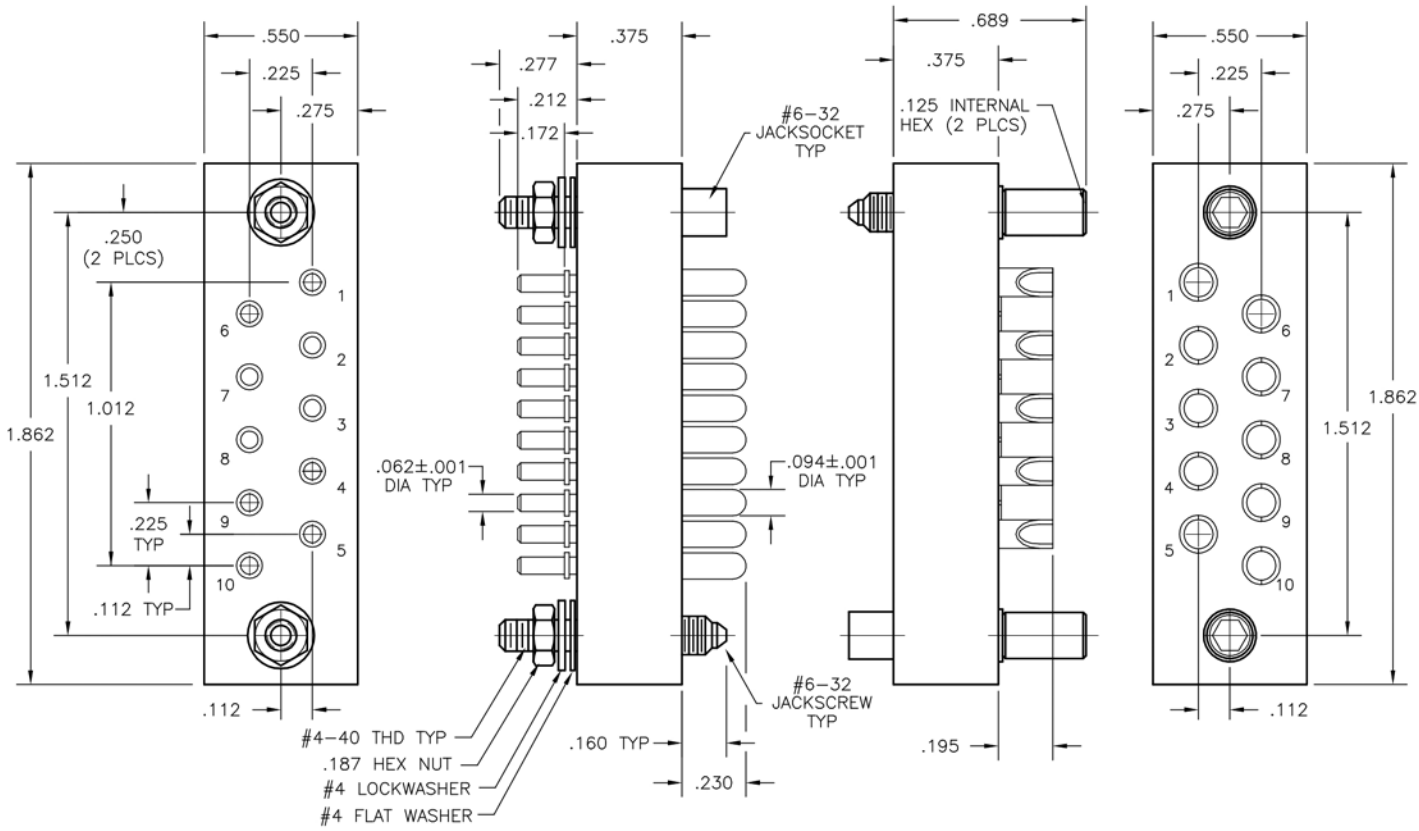

SEE OPPOSITE PAGE FOR 10 POSITION RIGHT ANGLE PLUG CONFIGURATION.

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	PA	10	S	JTB
RECEPTACLE:	PA	10	P	J
	XX	XX	X	XXX

PLUG		RECEPTACLE	
SERIES			
PA	Power connectors	PA	Power connectors
SIZE			
10	10 #12 contacts	10	10 #12 contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, solder cup	S	Socket, straight, solder cup
PD11	Pin, straight, dip solder, .172" x .062" dia	SD11	Socket, straight, dip solder, .172" x .062"
PR7	Pin, right angle, dip solder, .109" x .082" dia		
PR8	Pin, right angle, dip solder, .125" x .082" dia		
HARDWARE			
SY	Guide set	SY	Guide set
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, 1.054" (straight plug only)	JT	Turning jackset, 1.054"
JTB	Hex turning jackset, .314" (straight plug only)	JTB	Hex turning jackset, .314"
JTL	Long turning jackset, 1.175"	JTL	Long turning jackset, 1.175"


OPTIONS

- Option Codes: Add to the end of the part number. Example: PA10PD11SY-P39. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps ® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant


NOTES:
Molded bodies: Polyphenylene sulfide
Contact rating: #12 contacts = 23 amps
Contact material: Socket - Beryllium copper, gold plated
Pin - Brass gold plated
Contact plating: Nominal Au plating thickness is 20 microinches on mating surfaces
Test voltage: 2000 VRMS @ sea level; 460 VRMS @ 70,000 feet
Contact resistance: .023 volt maximum drop @ 23 amps (.001 ohm)
Engagement force: 24 ounces maximum average per contact

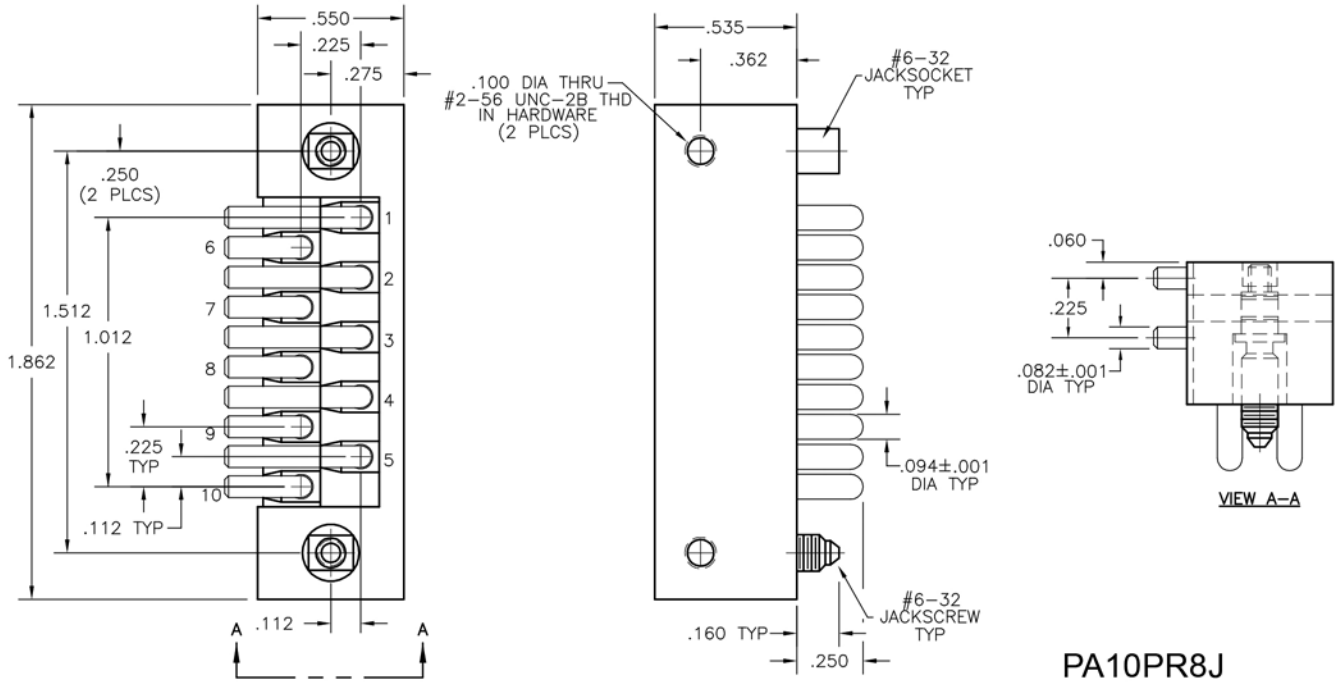


PA10PR8J

Downloaded from Arrow.com.

PB - PB
0.225" **I** 20 CONTACTS

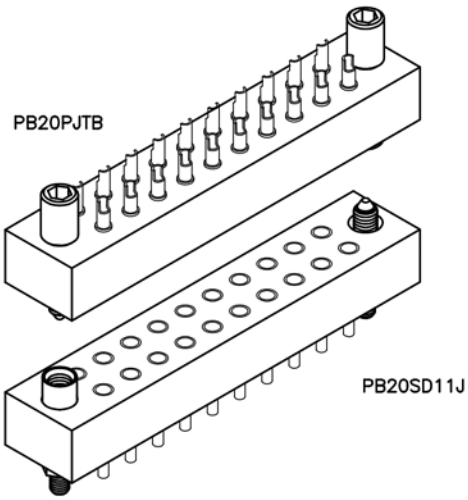

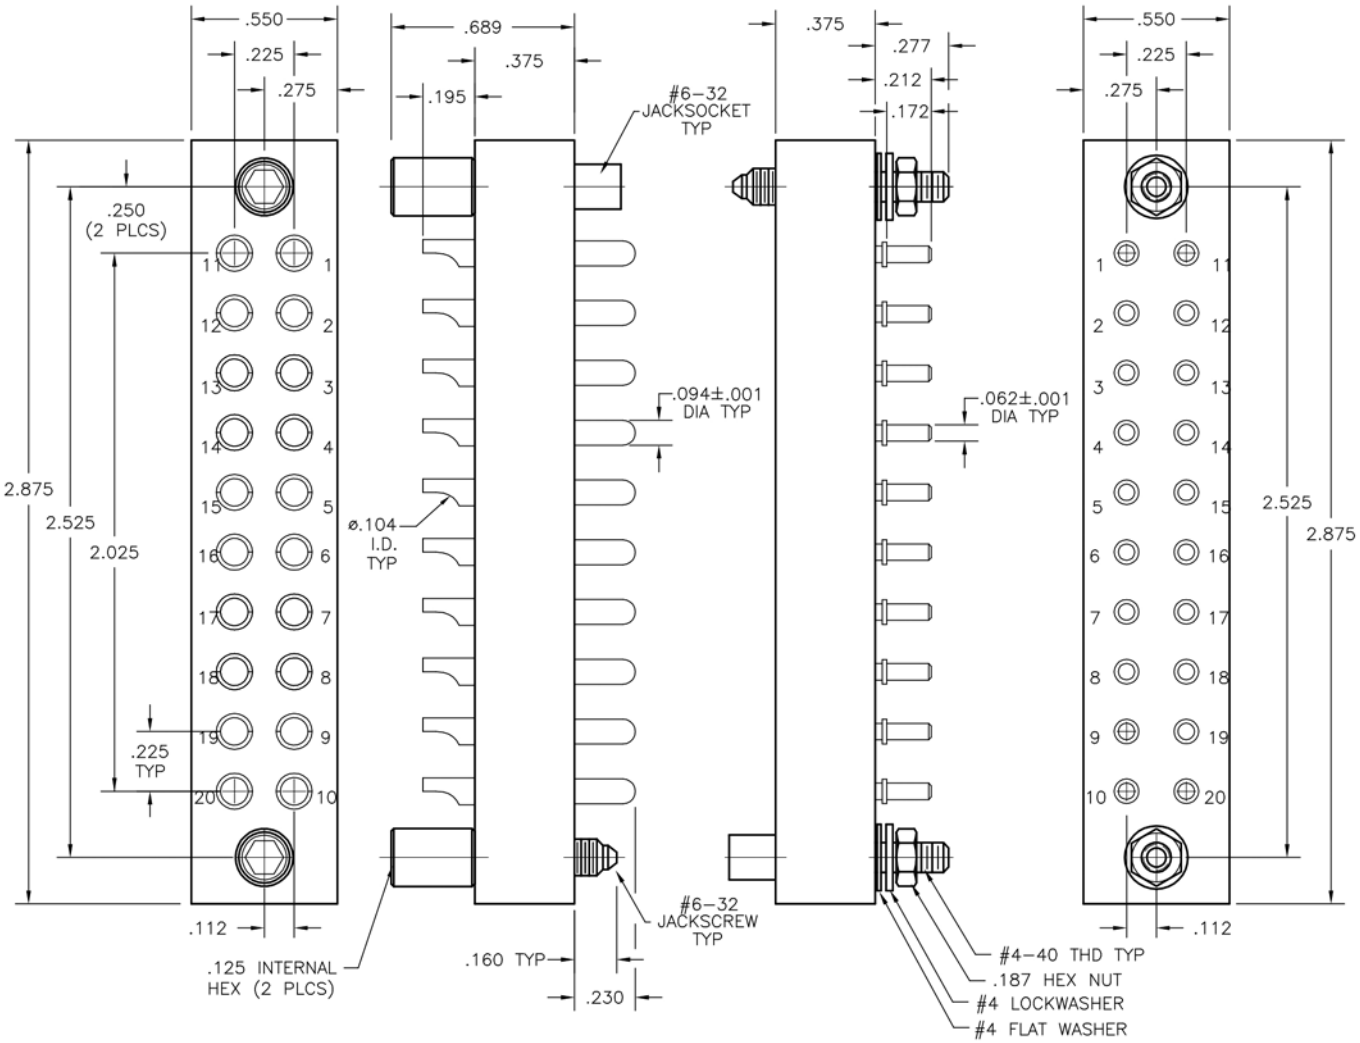

PLUG RECEPTACLE

SEE OPPOSITE PAGE FOR 20 POSITION RIGHT ANGLE PLUG CONFIGURATION.

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG:	PB	20	S	JTB
RECEPTACLE:	PB	20	P	J
	XX	XX	X	XXX

PLUG		RECEPTACLE	
SERIES			
PB	Power connectors	PB	Power connectors
SIZE			
20	20 #12 contacts	20	20 #12 contacts
CONTACTS			
	TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:
P	Pin, straight, solder cup	S	Socket, straight, solder cup
PD11	Pin, straight, dip solder, .172" x .062" dia	SD11	Socket, straight, dip solder, .172" x .062"
PR7	Pin, right angle, dip solder, .109" x .082" dia		
PR8	Pin, right angle, dip solder, .125" x .082" dia		
HARDWARE			
SY	Guide set	SY	Guide set
J	Fixed jackset	J	Fixed jackset
JT	Turning jackset, 1.054" (straight plug only)	JT	Turning jackset, 1.054"
JTB	Hex turning jackset, .314" (straight plug only)	JTB	Hex turning jackset, .314"
JTL	Long turning jackset, 1.175"	JTL	Long turning jackset, 1.175"


OPTIONS

- Option Codes: Add to the end of the part number. Example: PA5PD11SY-P39. Call factory for additional codes.

-D01 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with 63/37 or 60/40 solder. ☒
-P39 Pretinned contact terminations (except solder cups, wire wraps® and flex contacts) with SAC305 solder (lead free).

☒ = Option not RoHS compliant


NOTES:
Molded bodies: Polyphenylene sulfide
Contact rating: #12 contacts = 23 amps
Contact material: Socket - Beryllium copper, gold plated
Pin - Brass gold plated
Contact plating: Nominal Au plating thickness is 20 microinches on mating surfaces
Test voltage: 2000 VRMS @ sea level; 460 VRMS @ 70,000 feet
Contact resistance: .023 volt maximum drop @ 23 amps (.001 ohm)
Engagement force: 24 ounces maximum average per contact

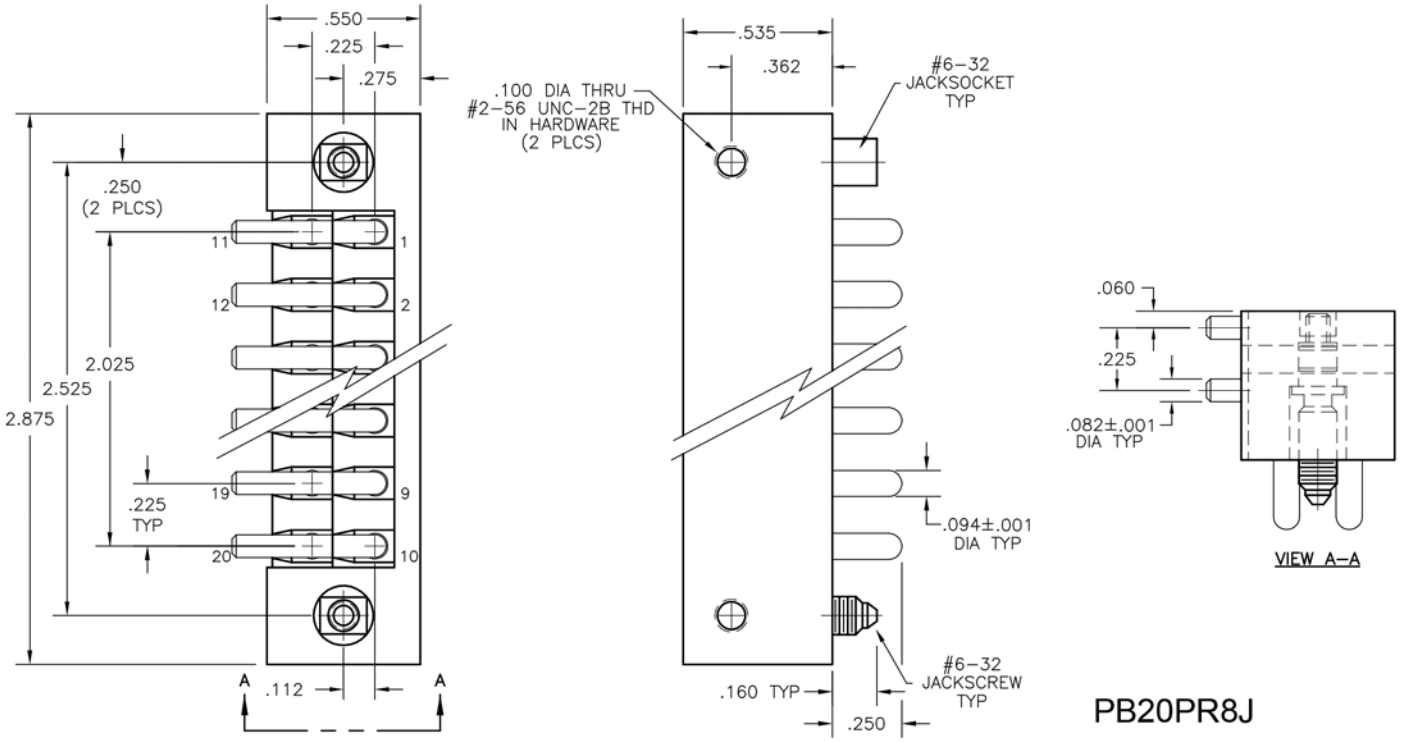



Downloaded from Arrow.com.

MISCELLANEOUS CONNECTORS – QUARTER ROUND SANDWICH BOARDS

WTA - WTA
0.087" BY 0.050" I 59 CONTACTS

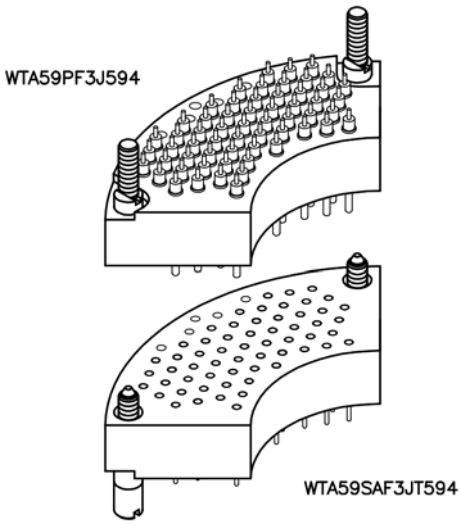

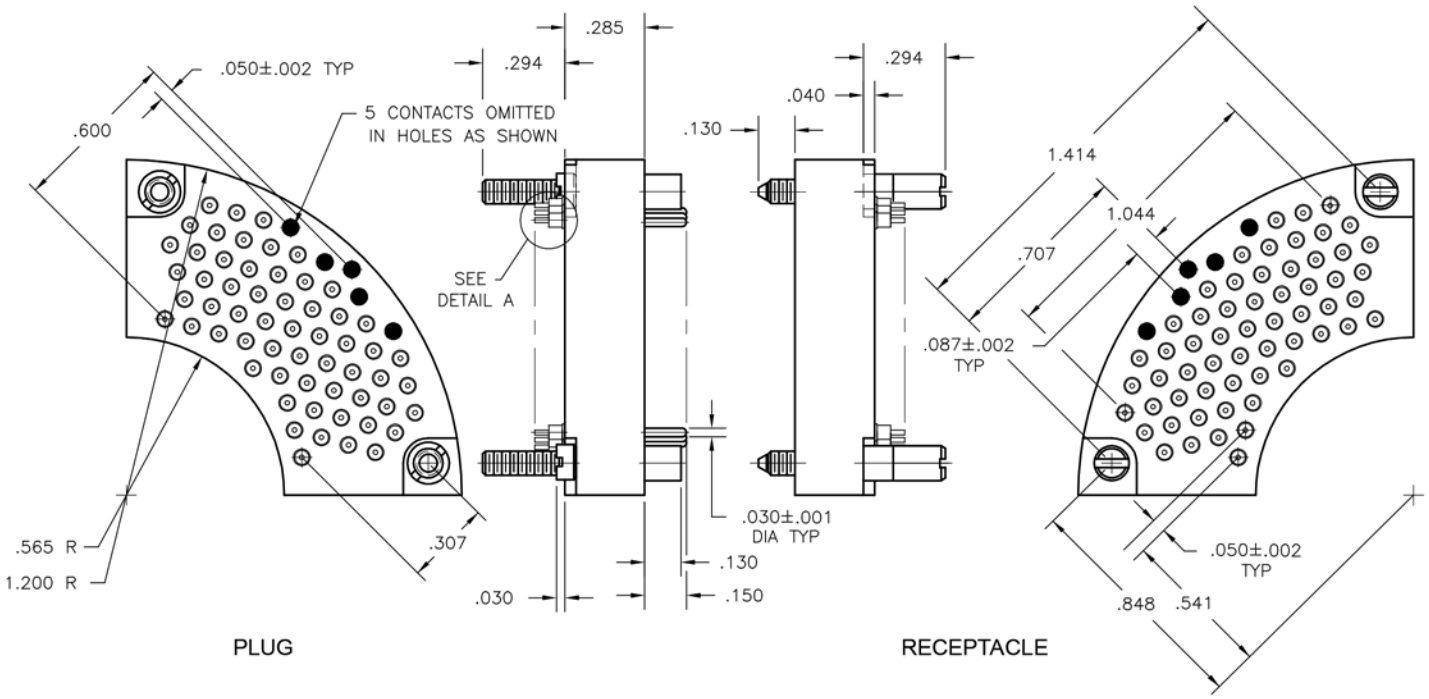


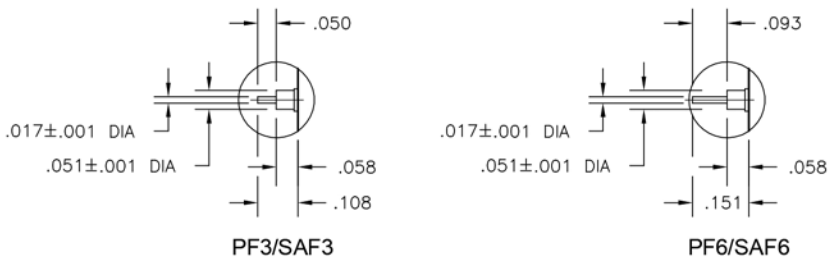

DETAIL A

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

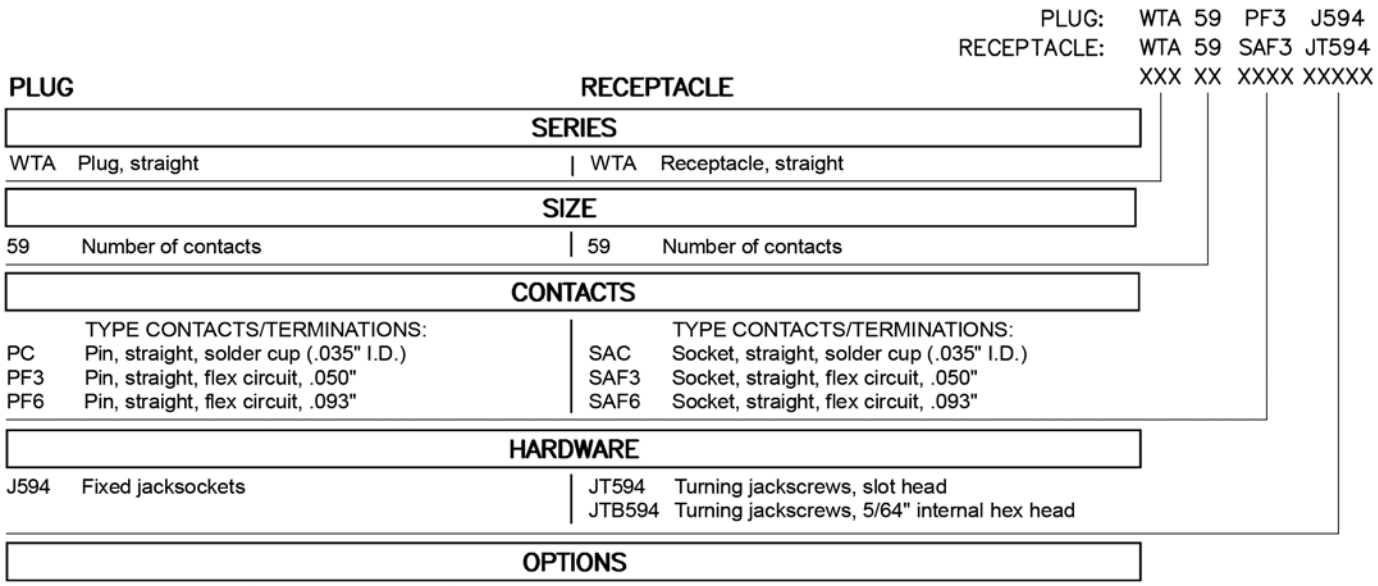



- The connector is loaded with 59 contacts in a 64 position quarter round insulator (-594).
- Insulator: glass filled nylon per ASTM-D4066.
- Not recommended for use with lead free solder process.
- To order connector without hardware, leave hardware designator out of part number. Example: WTA59SAF3-594.

Downloaded from Arrow.com.

MISCELLANEOUS CONNECTORS – STACKABLE BOARD-TO-BOARD

WE
0.100" I 111 CONTACTS

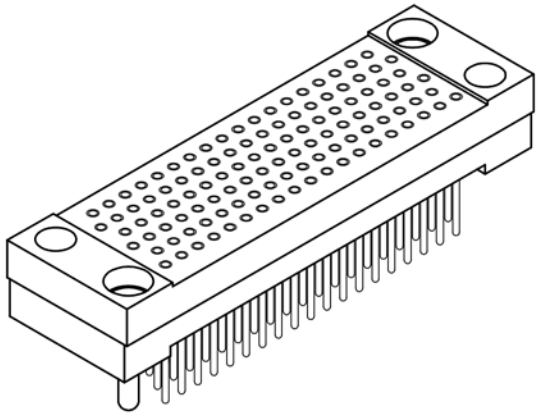

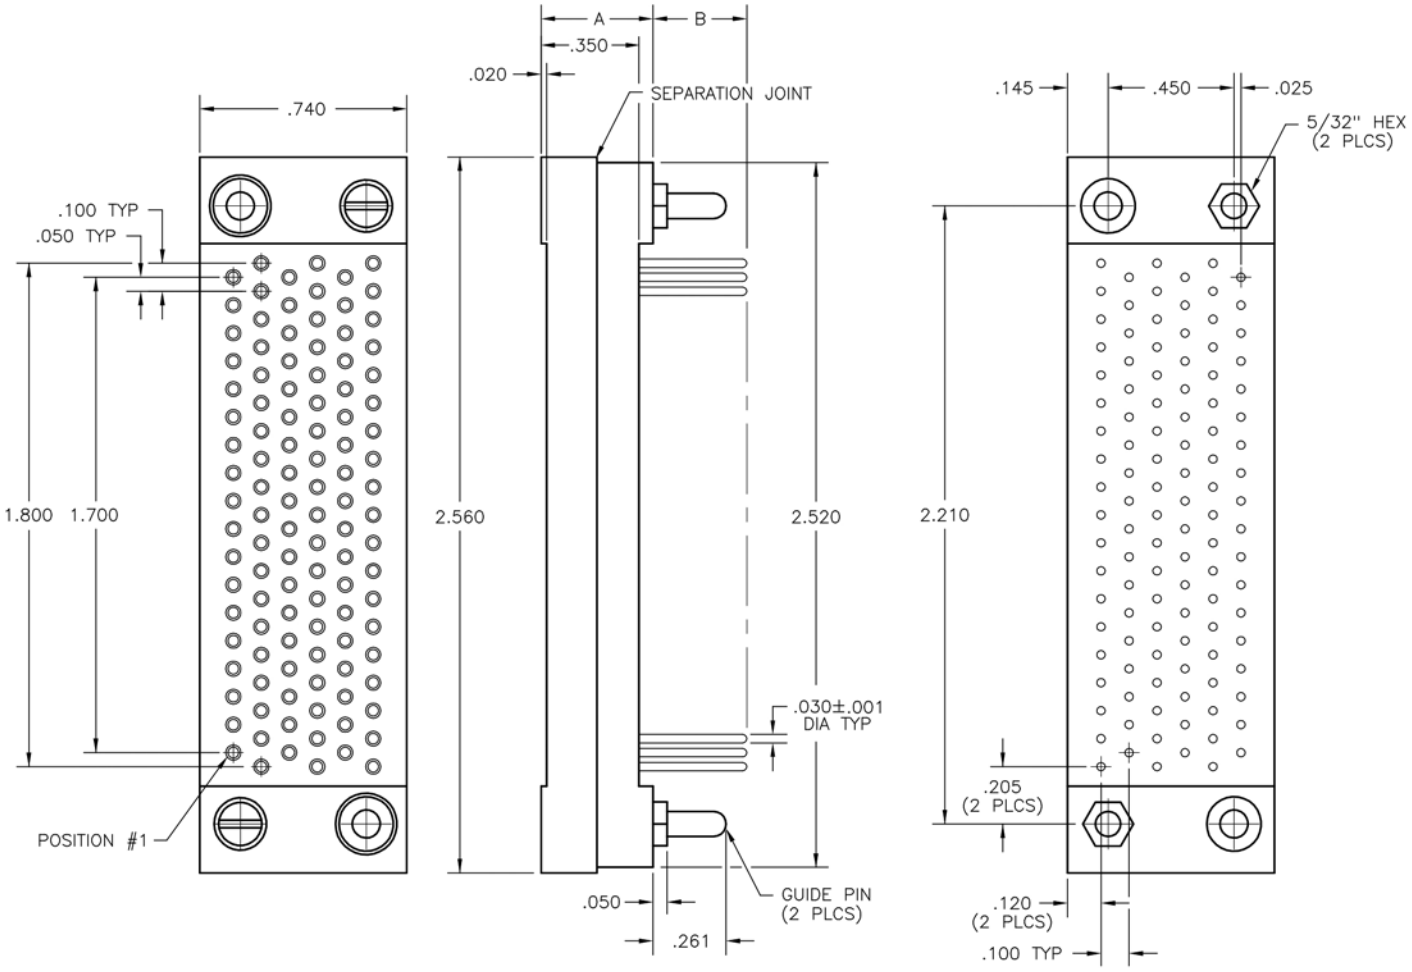

DIMENSIONS			
STYLE	A	B±.015	TYPE
WEA	.400	.335	STACKABLE
WEB	.450	.130	MOTHER BOARD
WEB	.450	.335	STACKABLE
WEC	.495	.335	STACKABLE

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

WEA 111 111A SP21 GB
XXX XXX XXXX XXXX XX

SERIES

WEA	Molding height .400"
WEB	Molding height .450"
WEC	Molding height .495"

SIZE

111	Number of positions

LOADING


111A	Fully loaded

CONTACTS

	TYPE CONTACTS/TERMINATIONS:
SP21	Socket, stackable, .335" termination length
SP9	Socket, dip solder, .130" termination length
PP14	Pin, stackable, .218" termination length (WEB Only)

HARDWARE

GA	Guide set, motherboard
GB	Guide set, stackable

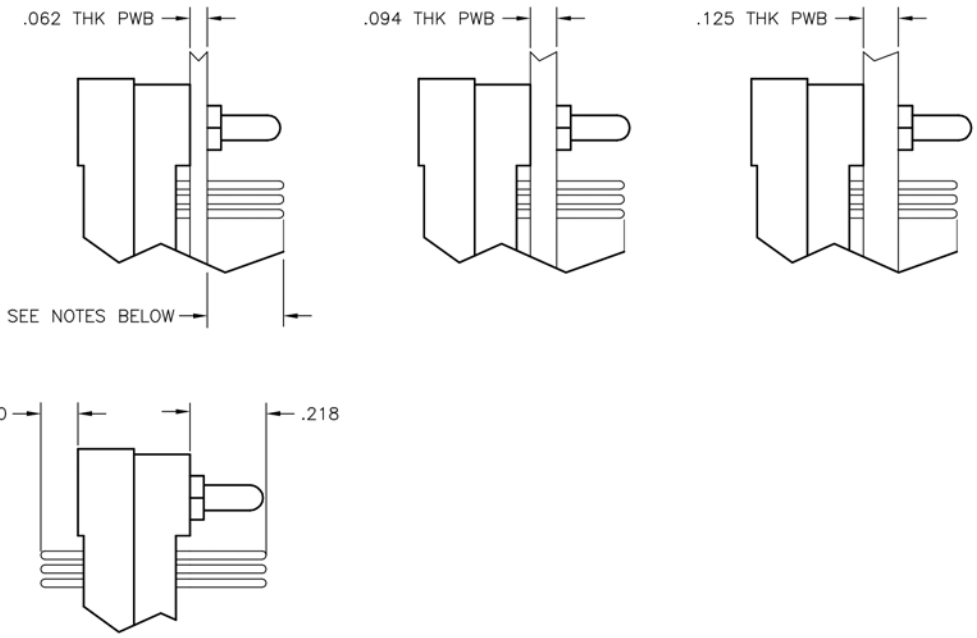

WEB111-111APP14GB

Notes:

Dimensions "A" & "B" represent current configurations. Board thickness information is for reference only. Contacts are individually replaced by removing the guide pins and screws. Molding halves will separate at the designated joint.


For Stackable Applications:
Minimum contact termination length to be .190" beyond PWB for minimum recommended mating in this series.
Maximum contact termination length to be .250" beyond PWB.


For Mother Board Applications:
Termination lengths typically extend .047" beyond PWB (example: a .062" board would typically require a .109" termination length, dimension "B").

Downloaded from Arrow.com.

MISCELLANEOUS CONNECTORS – STACKABLE BOARD-TO-BOARD

WE
0.100" I 135 CONTACTS

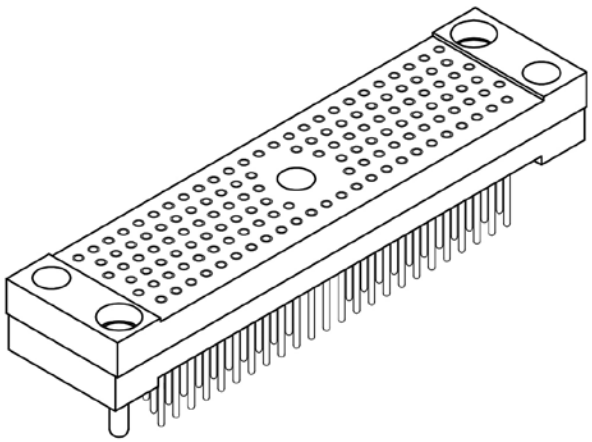

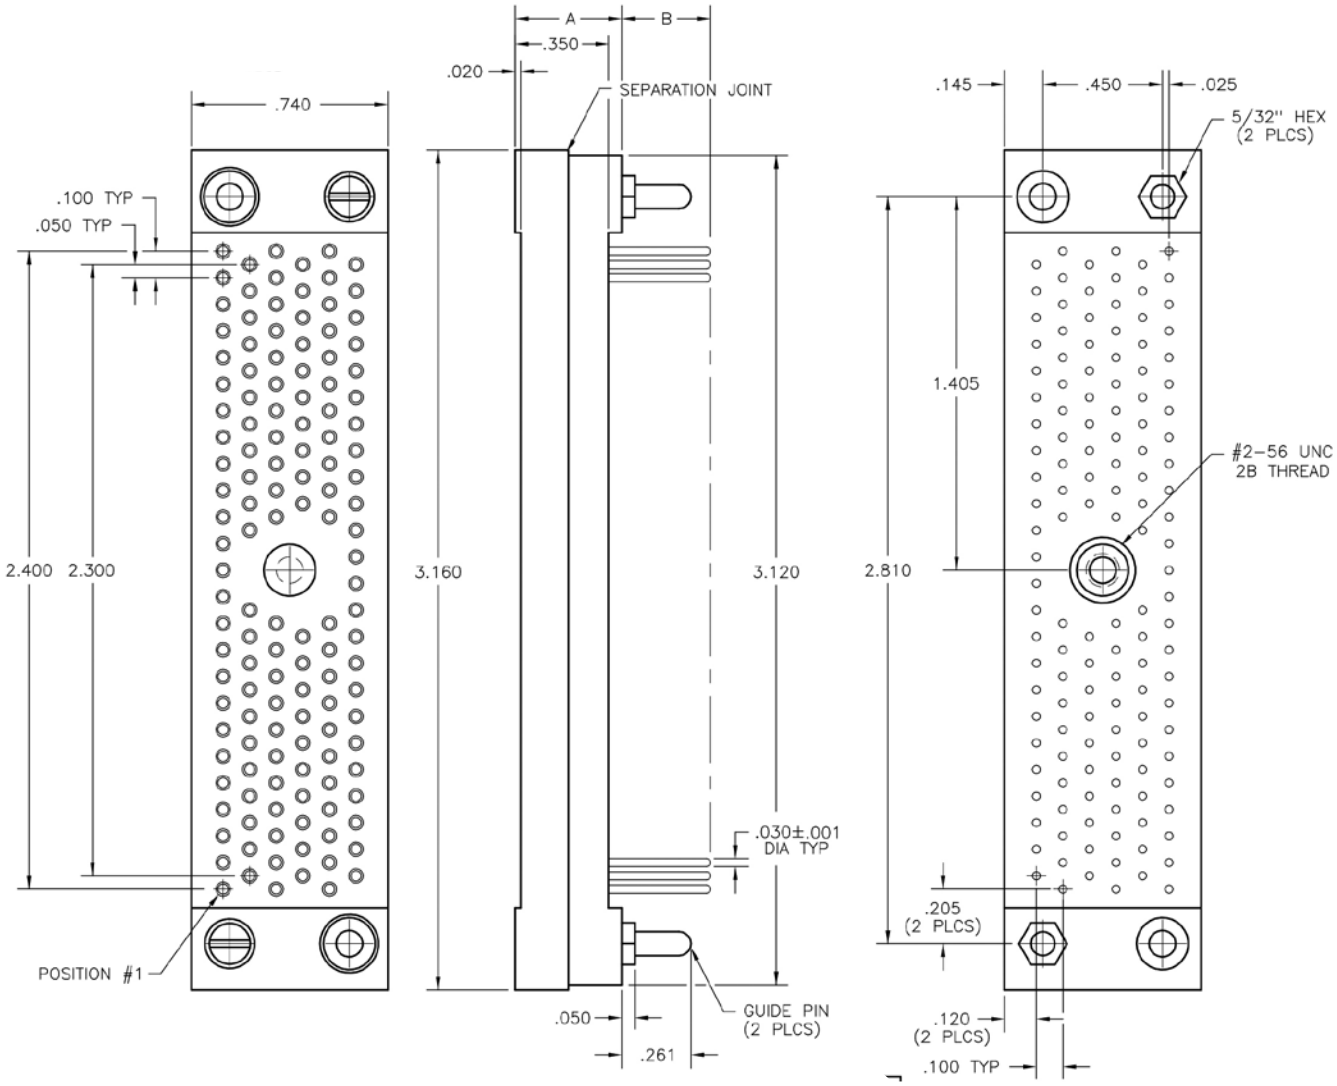

DIMENSIONS			
STYLE	A	B±.015	TYPE
WEA	.465	.335	STACKABLE
WEA	.465	.130	MOTHER BOARD
WEB	.500	.335	STACKABLE
WEB	.500	.130	MOTHER BOARD
WEC	.740	.335	STACKABLE
WEC	.740	.130	MOTHER BOARD

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

WEA 135 135A SP21 GB
XXX XXX XXXX XXXX XX

SERIES

WEA	Molding height .465"
WEB	Molding height .500"
WEC	Molding height .740"

SIZE

135	Number of positions

LOADING


135A	Fully loaded

CONTACTS

	TYPE CONTACTS/TERMINATIONS:
SP21	Socket, stackable, .335" termination length
SP9	Socket, dip solder, .130" termination length
PP21	Pin, stackable, .335" termination length (WEC only)

HARDWARE

GA	Guide set, motherboard
GB	Guide set, stackable
GC	Guide set, stackable (Both sides, WEC only)

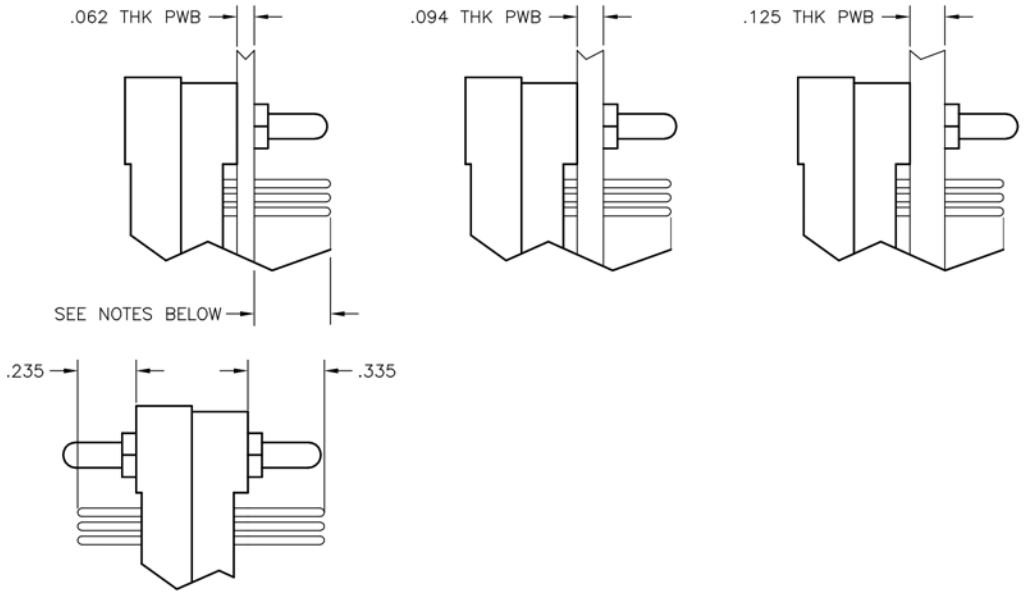

WEC135-135APP21GC

Notes:

Dimensions "A" & "B" represent current configurations. Board thickness information is for reference only. Contacts are individually replaced by removing the guide pins and screws. Molding halves will separate at the designated joint.

For Stackable Applications:
Minimum contact termination length to be .190" beyond PWB for minimum recommended mating in this series.
Maximum contact termination length to be .250" beyond PWB.

For Mother Board Applications:
Termination lengths typically extend .047" beyond PWB (example: a .062" board would typically require a .109" termination length, dimension "B").

Downloaded from Arrow.com.

AIRBORN WB SERIES: 0.050”

MIL-C-55302

molex

Downloaded from Arrow.com.

TABLE OF CONTENTS

AirBorn WB Series
0.050” Rectangular Plastic Board-Level Connectors

Specifications....W-97

Performance....W-98

Part Number Description....W-99

Two Row – PC Card or SMT-to-Board Connectors

WB Plug, Right-Angle, with Mounting Ears....W-100

WBB, WBA Plug, Straight, Surface-Mount, with Mounting Ears....W-102

Hardware....W-104

WB Board Layout - Plug, Right-Angle....W-105

WB Board Layout - Receptacle, Straight....W-106

WBB, WBA Board Layout - Plug, Straight, Surface-Mount....W-107

Downloaded from Arrow.com.

SPECIFICATIONS – MATERIALS AND FINISHES*

PIN CONTACTS:	Phosphor bronze per ASTM B 139
SOCKET CONTACT:	BeCu per MIL-C-55302
CONTACT FINISH:	Au per ASTM B 488-, SAE AMS 2422. Localized finish over MIL-C-55302
MOLDED INSULATORS:	Glass filled polyphenylene sulfide per MIL-M-24519, type GST-40F
KEY FEATURES:	Polarized octagonal guides can be a molded integral part of the insulator or separate stainless steel hardware.
TOLERANCES: *(Unless otherwise specified)*	Angles: ±5° Decimals: ±0.010” Fractions: ±1/64”

NOTES

Molex can manufacture special configurations for your exact specifications.

*Reference the above listed specifications or an equivalent industry standard when applicable

Downloaded from Arrow.com.

PERFORMANCE REFERENCE MIL-C-55302

CONTACT RATING: 1.5 amperes

SOLDERABILITY: Tested to MIL-STD-202, method 208

OPERATING TEMPERATURE: -65° to +125° C or -85° to +257° F

CONTACT ENGAGEMENT FORCE: 2.0 oz maximum with 0.0189/0.0190" diameter test pin in accordance with SAE AS 31971

CONTACT SEPARATION FORCE: 10 oz maximum with 0.0169/0.0170" diameter test pin in accordance with SAE AS 31971

CATEGORY	REQUIREMENTS	TEST METHOD PER: SAE AS 13441
TEST VOLTAGE	600V, RMS, 60 Hz at sea level 150V, RMS, 60 Hz at 70,000 feet	#3001
INSULATION RESISTANCE	5,000 megohms minimum at 500 VDC	#3003
DURABILITY	500 connector mating cycles	
CONTACT RESISTANCE	0.0375 volt maximum drop at 1.5 amperes (0.025 Ohms)	#3004

Downloaded from Arrow.com.

PART NUMBER DESCRIPTION

Each part number consists of four elements: series, size (number of contacts), type of contacts, and type of hardware.

Each catalog page shows the choices available for each of these elements. By selecting one option from each category on the page, you can build a set of connectors to meet your requirements.

Each part number is identified by a combination of letters and/or numbers of varying lengths. These numbers are written together without spaces or punctuation.

SERIES:
The series letters identify the connector body style. Follow choices on each catalog page for series numbers.

SIZE:
The size is determined by the number of contacts in the connector and is an integral part of the part number. Order only sizes shown on the catalog page unless otherwise noted.


CONTACTS:
Each page also identifies all contact options for a given connector.


HARDWARE:
Hardware options are shown on each catalog page. Follow the choices for each connector.

NOTES:
Each page is as comprehensive as possible. However, if you do not find a particular connector size or option, please contact the factory for further assistance.

Downloaded from Arrow.com.

WB - WB
0.050" **I** 20 THROUGH 132 CONTACTS

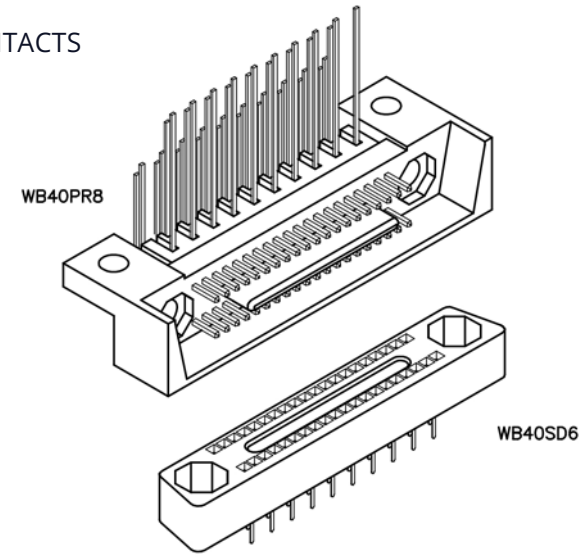

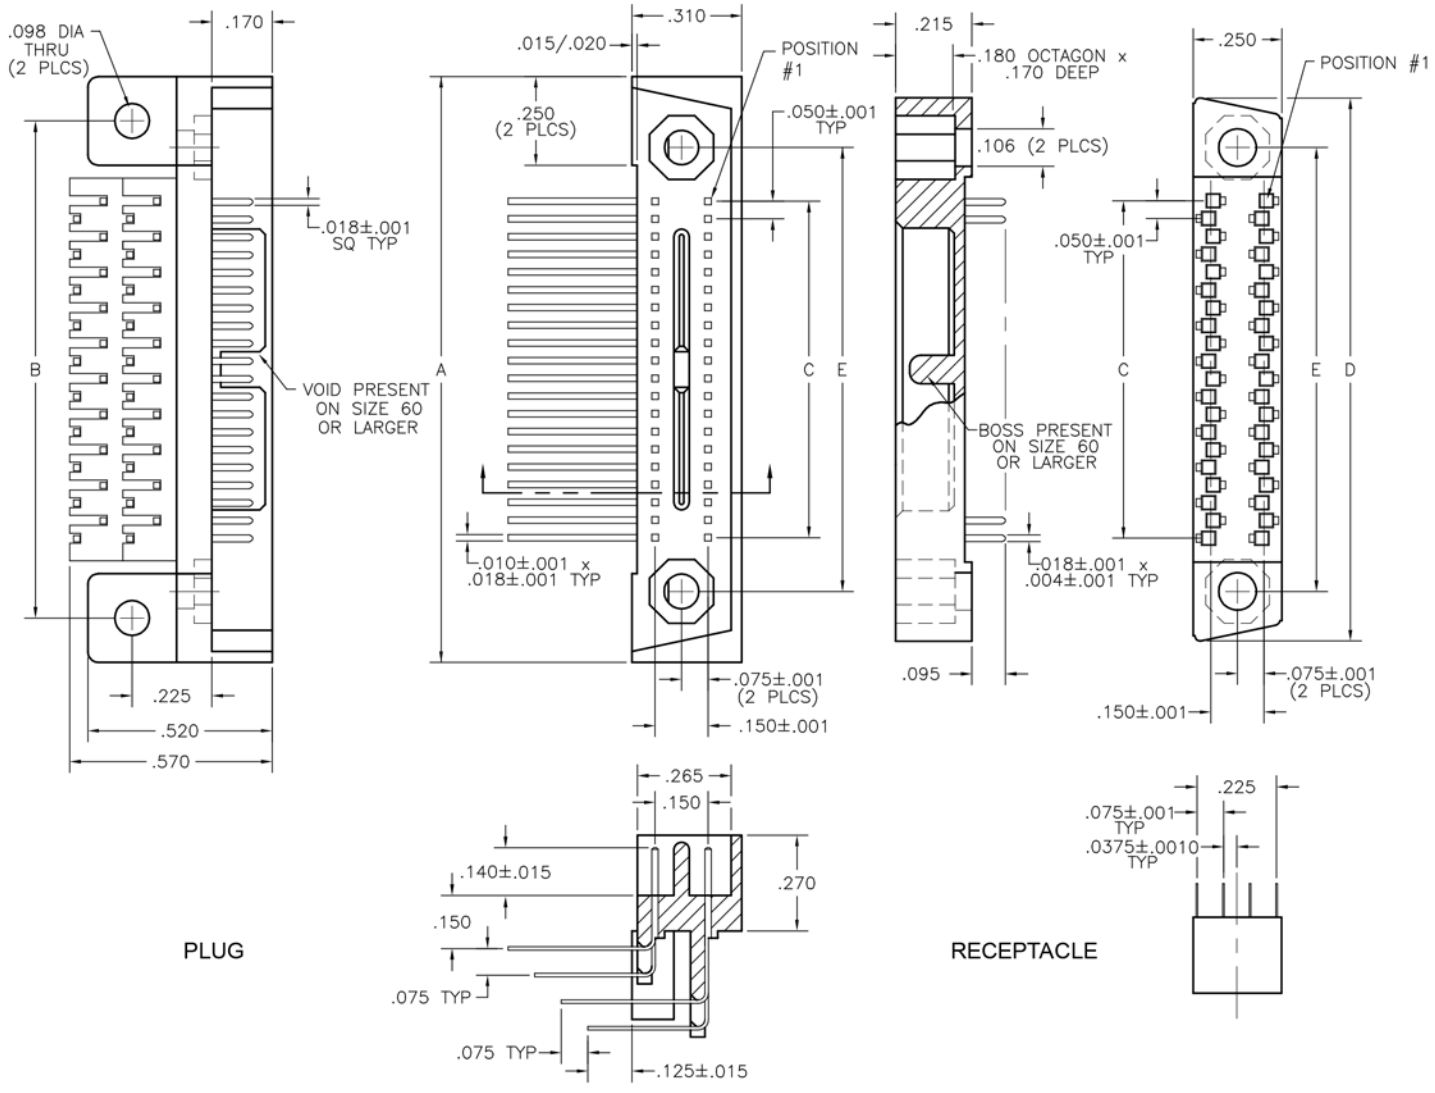

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WB40PR8
RECEPTACLE: WB40SD6
XXXXXXXXXXX


PLUG	RECEPTACLE
SERIES	
WB 2 row, right angle, plug, with mounting ears	WB 2 row, straight, receptacle, with mounting ears
SIZE	
20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132	20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132
CONTACTS	
TYPE CONTACTS/TERMINATIONS:	TYPE CONTACTS/TERMINATIONS:
PR8 Pin, right angle, dip solder, .125"	SD6 Socket, straight, dip solder, .095"
	SD9 Socket, straight, dip solder, .140"
	SD12 Socket, straight, dip solder, .190"
	SD19 Socket, straight, dip solder, .300"
HARDWARE	
STYLE OF HARDWARE: (See WB-9)	STYLE OF HARDWARE: (See WB-9)
K*_* Integral keying guides, polarized	K*_* Integral keying guides, polarized
KY*_* Stainless steel keying guides, polarized	KY*_* Stainless steel keying guides, polarized
JMM 2 stainless steel fixed jackscrews	JTFF 2 stainless steel turning jacksockets


DIMENSIONS					
SIZE	A	B	C	D	E
20	1.150	.900	.450	1.030	.750
30	1.400	1.150	.700	1.280	1.000
40	1.650	1.400	.950	1.530	1.250
50	1.900	1.650	1.200	1.780	1.500
60	2.150	1.900	1.450	2.030	1.750
70	2.400	2.150	1.700	2.280	2.000
80	2.650	2.400	1.950	2.530	2.250
90	2.900	2.650	2.200	2.780	2.500
100	3.150	2.900	2.450	3.030	2.750
110	3.400	3.150	2.700	3.280	3.000
128	3.850	3.600	3.150	3.730	3.450
132	3.950	3.700	3.250	3.830	3.550

Downloaded from Arrow.com.

WBB - WB AND WBA - WB

0.050" I 20 THROUGH 132 CONTACTS

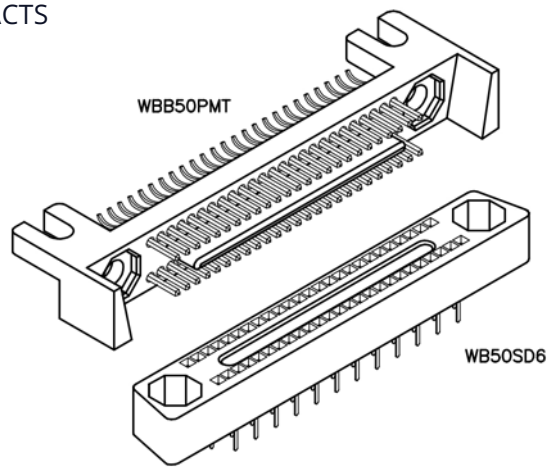

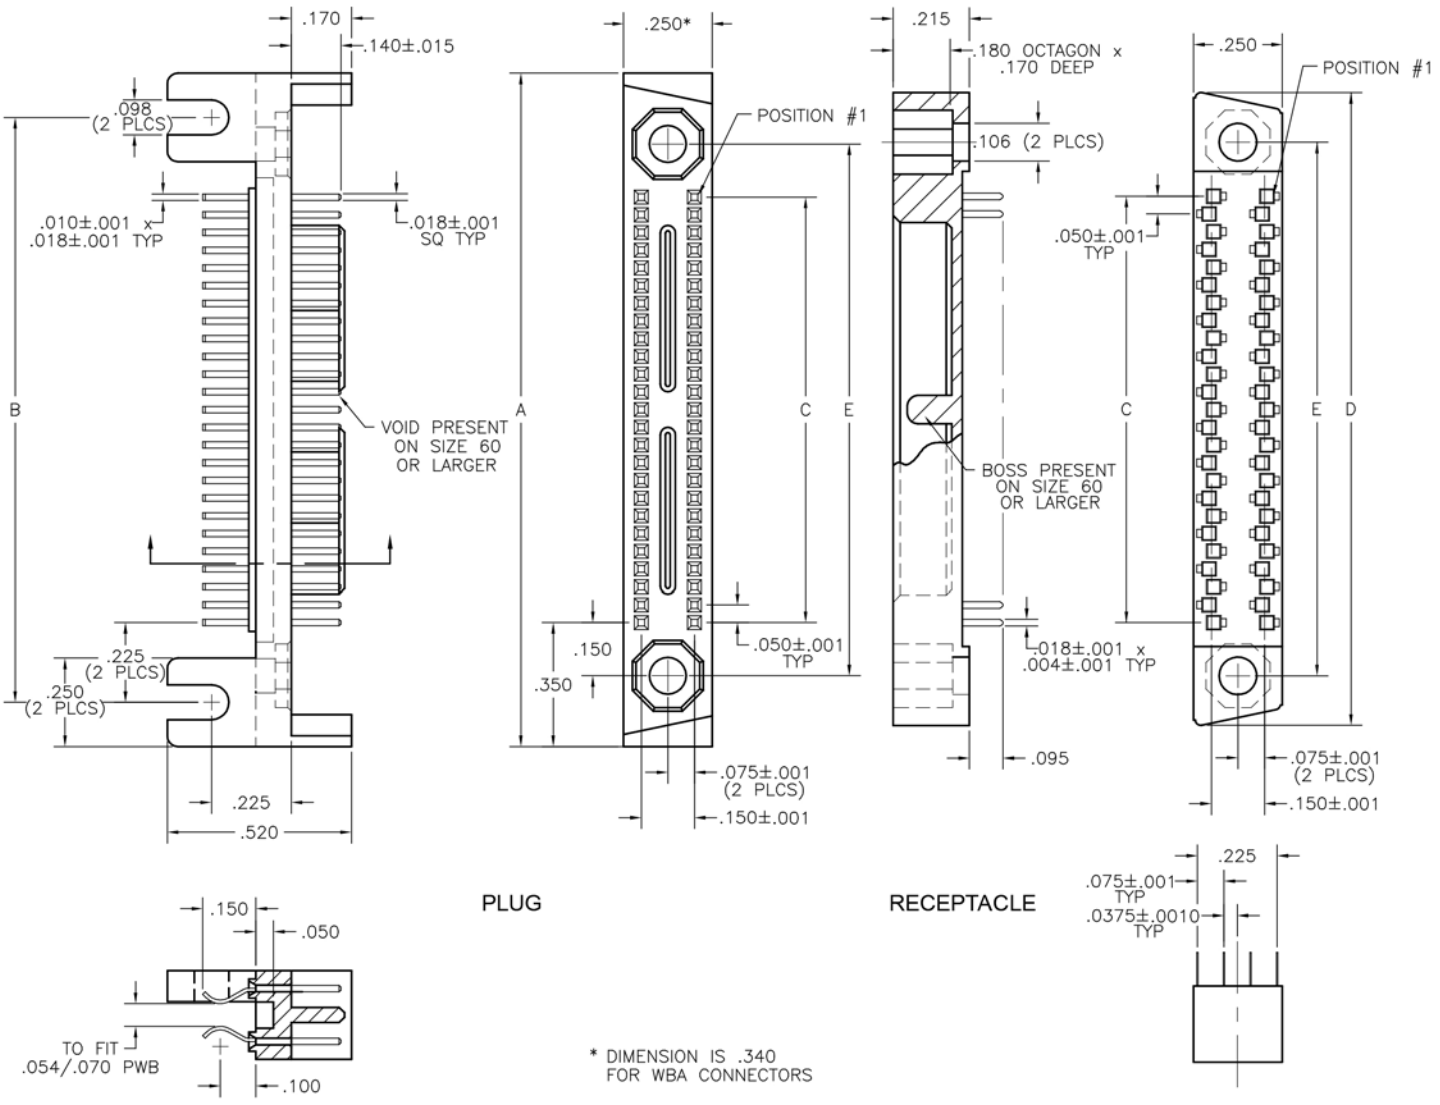

Downloaded from Arrow.com.

LEAD CONFIGURATION OPTIONS

PLUG: WBB50PMT
RECEPTACLE: WB50SD6
XXXXXXXXXXX

PLUG	RECEPTACLE
SERIES	
WBB 2 row, SMT, plug, with mounting ears WBA 2 row, SMT, plug, full skirt, with mounting ears	WB 2 row, straight, receptacle, with mounting ears
SIZE	
20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132	20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 128, 132
CONTACTS	
TYPE CONTACTS/TERMINATIONS: PMT Pin, card edge SMT (Board: .054/.070)	TYPE CONTACTS/TERMINATIONS: SD6 Socket, straight, dip solder, .095" SD9 Socket, straight, dip solder, .140" SD12 Socket, straight, dip solder, .190" SD19 Socket, straight, dip solder, .300"
HARDWARE	
STYLE OF HARDWARE: (See WB-9) K*_* Integral keying guides, polarized KY*_* Stainless steel keying guides, polarized JMM 2 stainless steel fixed jackscrews	STYLE OF HARDWARE: (See WB-9) K*_* Integral keying guides, polarized KY*_* Stainless steel keying guides, polarized JTFF 2 stainless steel turning jacksockets


DIMENSIONS					
SIZE	A	B	C	D	E
20	1.150	.900	.450	1.030	.750
30	1.400	1.150	.700	1.280	1.000
40	1.650	1.400	.950	1.530	1.250
50	1.900	1.650	1.200	1.780	1.500
60	2.150	1.900	1.450	2.030	1.750
70	2.400	2.150	1.700	2.280	2.000
80	2.650	2.400	1.950	2.530	2.250
90	2.900	2.650	2.200	2.780	2.500
100	3.150	2.900	2.450	3.030	2.750
110	3.400	3.150	2.700	3.280	3.000
128	3.850	3.600	3.150	3.730	3.450
132	3.950	3.700	3.250	3.830	3.550

Downloaded from Arrow.com.


HARDWARE

Polarization


Integral Keying Guides

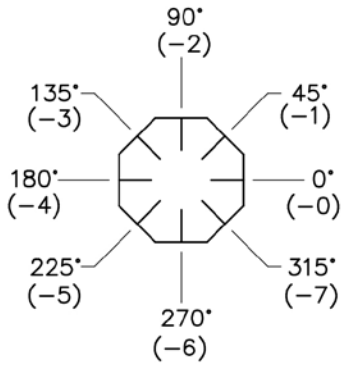


Polarization



Polarization Chart

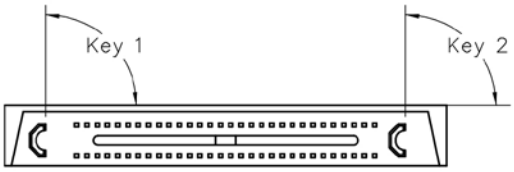

Example: WB**PR8K2-2
(Plug)

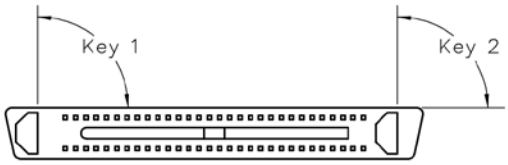


Example: WB**SD6K2-2
(Receptacle)

Notes:
1. Each "dash" number represents 45° clocking from horizontal (0°).
2. The first number designates "Key 1", the second number designates "Key 2".

Hardware Options:

Hardware Style: KY* - *



Stainless Steel Polarized Guide

Plug	Mates with	Receptacle
–0		–0
–1		–7
–2		–6
–3		–5

Plug	Mates with	Receptacle
–4		–4
–5		–3
–6		–2
–7		–1


Hardware Style: JMM
(Plug only)



Groove Pin

Fixed Jackscrew
(#4-40 UNC-2A)

Hardware Style: JTFF
(Receptacle only)



E-Ring


Turning Jacksocket

Downloaded from Arrow.com.


TWO ROW – RIGHT-ANGLE PTH PLUG

WB – RECOMMENDED BOARD LAYOUT

0.050" I 20 THROUGH 132 CONTACTS

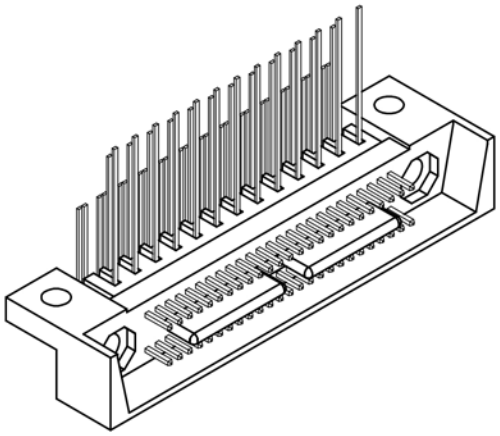

DIMENSIONS		
SIZE	A	B
20	.900	.450
30	1.150	.700
40	1.400	.950
50	1.650	1.200
60	1.900	1.450
70	2.150	1.700
80	2.400	1.950
90	2.650	2.200
100	2.900	2.450
110	3.150	2.700
128	3.600	3.150
132	3.700	3.250

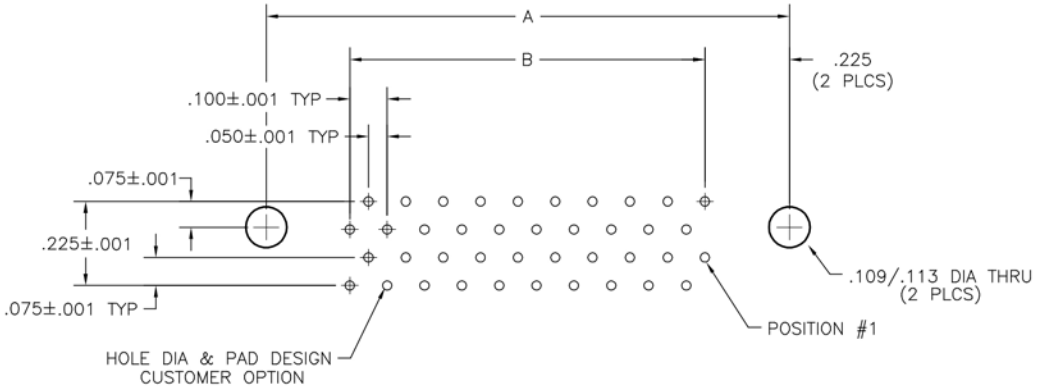


RIGHT ANGLE PTH PLUG
PC BOARD VIEWED FROM COMPONENT SIDE


SIZE	CONTACT ID	SIZE	CONTACT ID	SIZE	CONTACT ID
20	19 17 15 13 11 20 18 16 14 12 9 7 5 3 1 10 8 6 4 2	60	59 57 — 33 31 60 58 — 34 32 29 27 — 3 1 30 28 — 4 2	100	99 97 — 53 51 100 98 — 54 52 49 47 — 3 1 50 48 — 4 2
30	30 28 26 24 22 20 18 16 29 27 25 23 21 19 17 15 13 11 9 7 5 3 1 14 12 10 8 6 4 2	70	70 68 — 38 36 69 67 — 39 37 35 33 — 3 1 34 32 — 4 2	110	110 108 — 58 56 109 107 — 59 57 55 53 — 3 1 54 52 — 4 2
40	39 37 — 23 21 40 38 — 24 22 19 17 — 3 1 20 18 — 4 2	80	79 77 — 43 41 80 78 — 44 42 39 37 — 3 1 40 38 — 4 2	128	127 125 — 67 65 128 126 — 68 66 63 61 — 3 1 64 62 — 4 2
50	50 48 — 28 26 49 47 — 29 27 25 23 — 3 1 24 22 — 4 2	90	90 88 — 48 46 89 87 — 49 47 45 43 — 3 1 44 42 — 4 2	132	131 129 — 69 67 132 130 — 70 68 65 63 — 3 1 66 64 — 4 2

Downloaded from Arrow.com.












WB – RECOMMENDED BOARD LAYOUT
0.050" I 20 THROUGH 132 CONTACTS

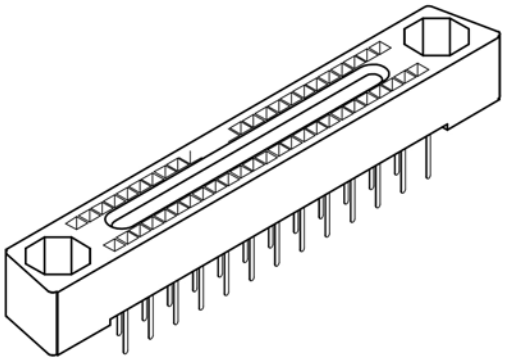

DIMENSIONS		
SIZE	A	B
20	.750	.450
30	1.000	.700
40	1.250	.950
50	1.500	1.200
60	1.750	1.450
70	2.000	1.700
80	2.250	1.950
90	2.500	2.200
100	2.750	2.450
110	3.000	2.700
128	3.450	3.150
132	3.550	3.250

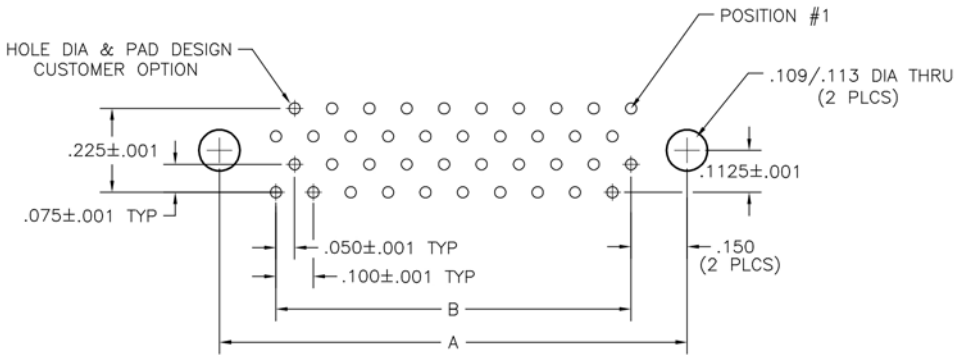

STRAIGHT PTH RECEPTACLE
PC BOARD VIEWED FROM COMPONENT SIDE


SIZE	CONTACT ID	SIZE	CONTACT ID	SIZE	CONTACT ID
20		60		100	
30		70		110	
40		80		128	
50		90		132	

Downloaded from Arrow.com.

TWO ROW – STRAIGHT SMT PLUG












WBB - WBA – RECOMMENDED BOARD LAYOUT

0.050" I 20 THROUGH 132 CONTACTS

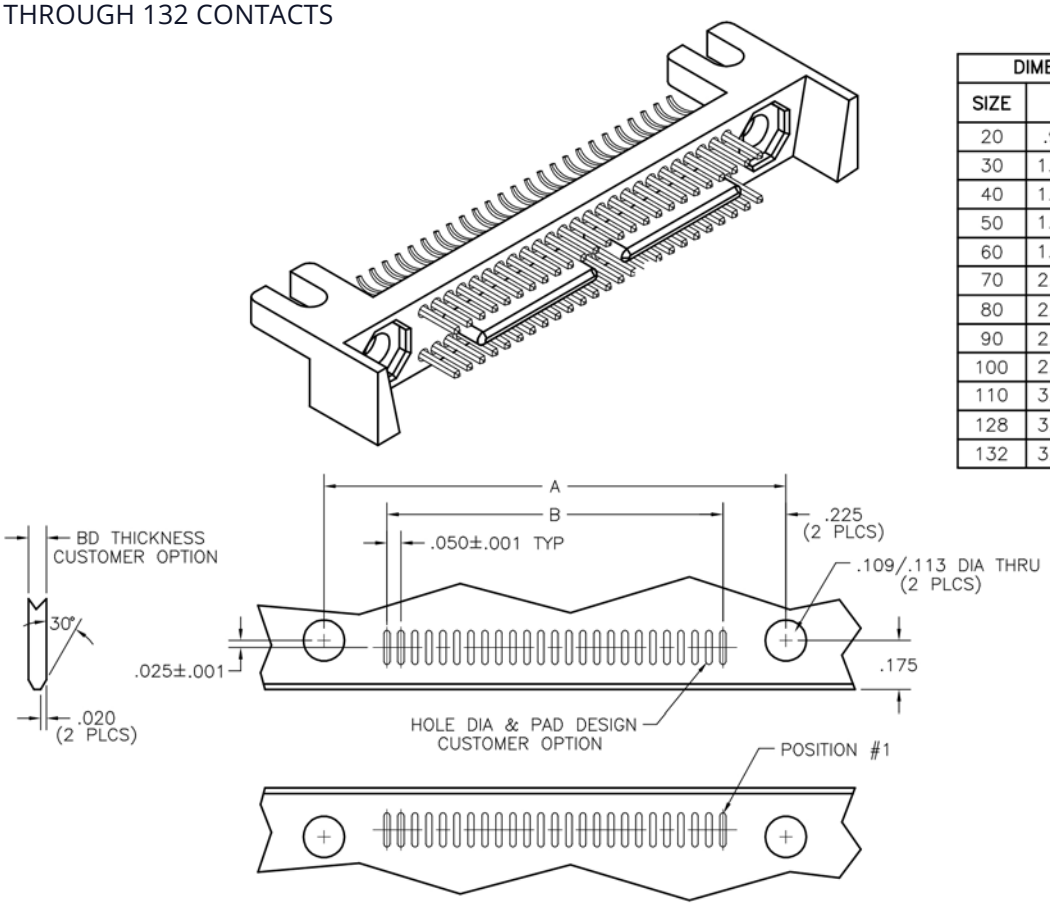

STRAIGHT SMT PLUG

DIMENSIONS		
SIZE	A	B
20	.900	.450
30	1.150	.700
40	1.400	.950
50	1.650	1.200
60	1.900	1.450
70	2.150	1.700
80	2.400	1.950
90	2.650	2.200
100	2.900	2.450
110	3.150	2.700
128	3.600	3.150
132	3.700	3.250

SIZE	CONTACT ID	SIZE	CONTACT ID	SIZE	CONTACT ID
20		60		100	
30		70		110	
40		80		128	
50		90		132	

Downloaded from Arrow.com.


AIRBORN W SERIES ACCESSORIES

molex

Downloaded from Arrow.com.

ACCESSORIES

FLOATING MOUNTS FOR WTB-WTK RECEPTACLES

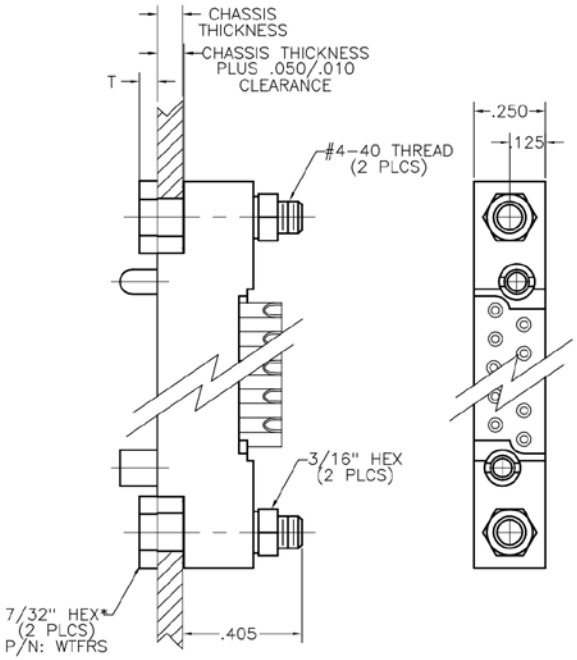


FLOATING MOUNT REAR

DIMENSIONS			
CHASSIS THICKNESS	MOUNTING SCREW HEX HEAD	MOUNTING SCREW ROUND HEAD	T
.062	WTFRS062	WTFRAS062	.062
.093	WTFRS093	WTFRAS093	.062
.125	WTFRS125	WTFRAS125	.050

CONNECTOR SIZES 10–70 REQUIRE 2 WTFRS SCREW ASSEMBLIES.

CONNECTOR SIZES OVER 70 REQUIRE 2 WTFRS ASSEMBLIES AND ONE WTFRA SCREW ASSEMBLY.

* – 7/32 DIA ROUND HEAD – WTFRAS CENTER POSITION ON SIZES OVER 70

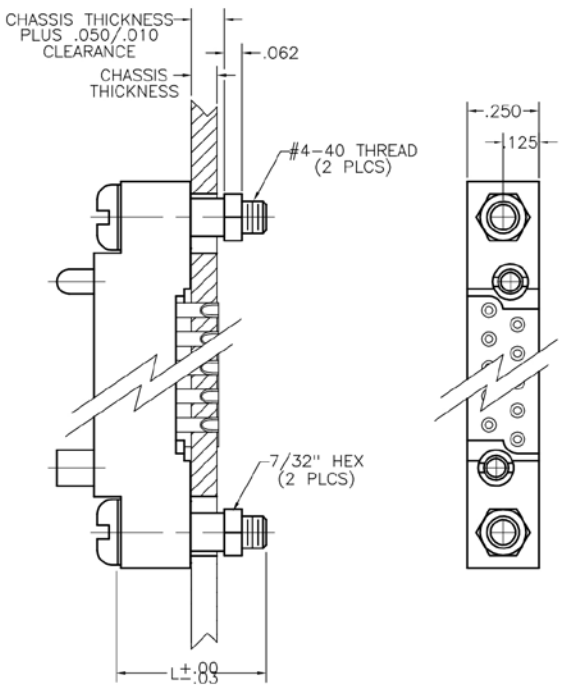


FLOATING MOUNT FRONT

DIMENSIONS			
CHASSIS THICKNESS	BUSHING	QTY. REQ. FOR SIZES 10–70	L
.062	WTFFS062	2	.50
.093	WTFFS093		.50
.125	WTFFS125		.56

CHASSIS CUTOUT WTB - WTK

SIZES 10-70


DIMENSIONS					
SIZE	A +.006 −.000	B ±.003	SIZE	A +.006 −.000	B ±.003
10	.882	1.100	44	2.582	2.800
14	1.082	1.300	50	2.882	3.100
20	1.382	1.600	54	3.082	3.300
24	1.582	1.800	56	3.182	3.400
26	1.682	1.900	60	3.382	3.600
30	1.882	2.100	66	3.682	3.900
36	2.182	2.400	70	3.882	4.100
40	2.382	2.600			

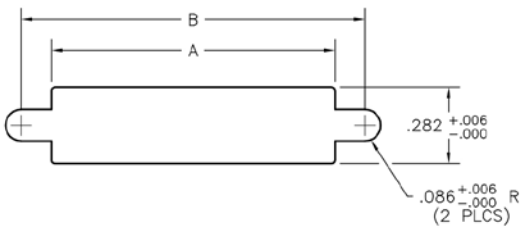


Downloaded from Arrow.com.


ACCESSORIES


FLOATING MOUNTS FOR WTB - WTK RECEPTACLES

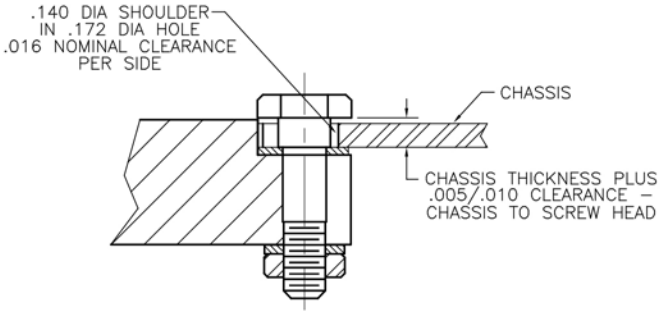

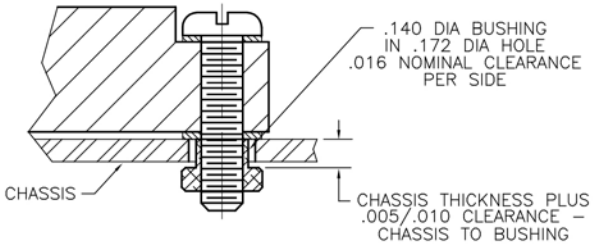

FLOATING STUD,
HEX HEAD
7/32±.005 HEX HEAD

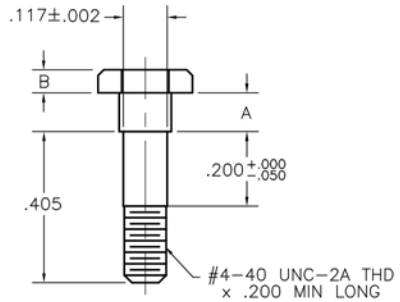

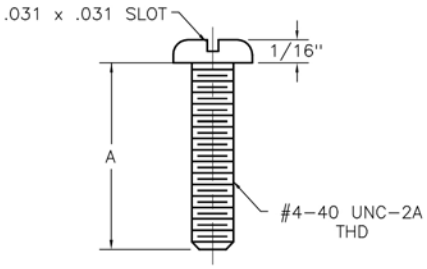



FLOATING STUD,
ROUND HEAD
.212±.007 DIA HEAD

FLAT WASHER
.215 O.D. x .120 I.D.

SPLIT LOCKWASHER
.212±.015 O.D. x .115 I.D.

HEX NUT
3/16±.005

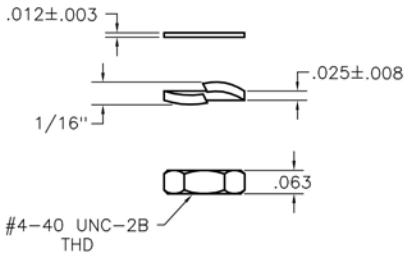

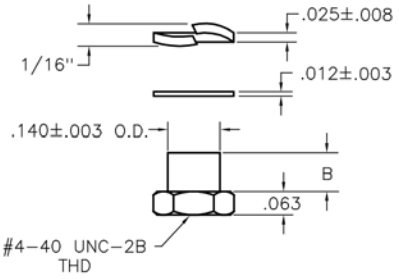

SPLIT LOCKWASHER
.212±.015 O.D. x .115 I.D.

FLAT WASHER
.215 O.D. x .120 I.D.

FLOATING BUSHING
7/32" HEX

PART NUMBER	A +.000 −.005	B +.000 −.005	CHASSIS THICKNESS
WTFRS062	.073	.062	.062
WTFRS093	.104	.062	.093
WTFRS125	.135	.050	.125


PART NUMBER	A +.000 −.030	B±.003	CHASSIS THICKNESS
WTFFS040	.439	.051	.040
WTFFS062	.500	.073	.062
WTFFS093	.500	.104	.093
WTFFS125	.562	.135	.125
WTFFS200	.625	.210	.200

PART DESCRIPTION	MATERIAL SPECIFICATION	FINISH SPECIFICATION	WTFRS	WTFRAS	WTFFS
FLOATING STUD 7/32" DIA, ROUND HEAD	SST SERIES 300 PER ASTM–A582 AND/OR QQ–S–763/766	PASSIVATE PER SAE AMS–QQ–P–35 OR ASTM–A967		X	
FLOATING STUD 7/32" HEX HEAD			X		
FLOATING BUSHING 7/32" HEX HEAD					X
MOUNTING SCREW 7/32" DIA, ROUND HEAD					X
#4 LOCKWASHER			X	X	X
#4 FLAT WASHER			X	X	X
HEX NUT #4–40			X	X	

Downloaded from Arrow.com.

ACCESSORIES

FACE SEAL GASKETS FOR WTA - WTB SERIES

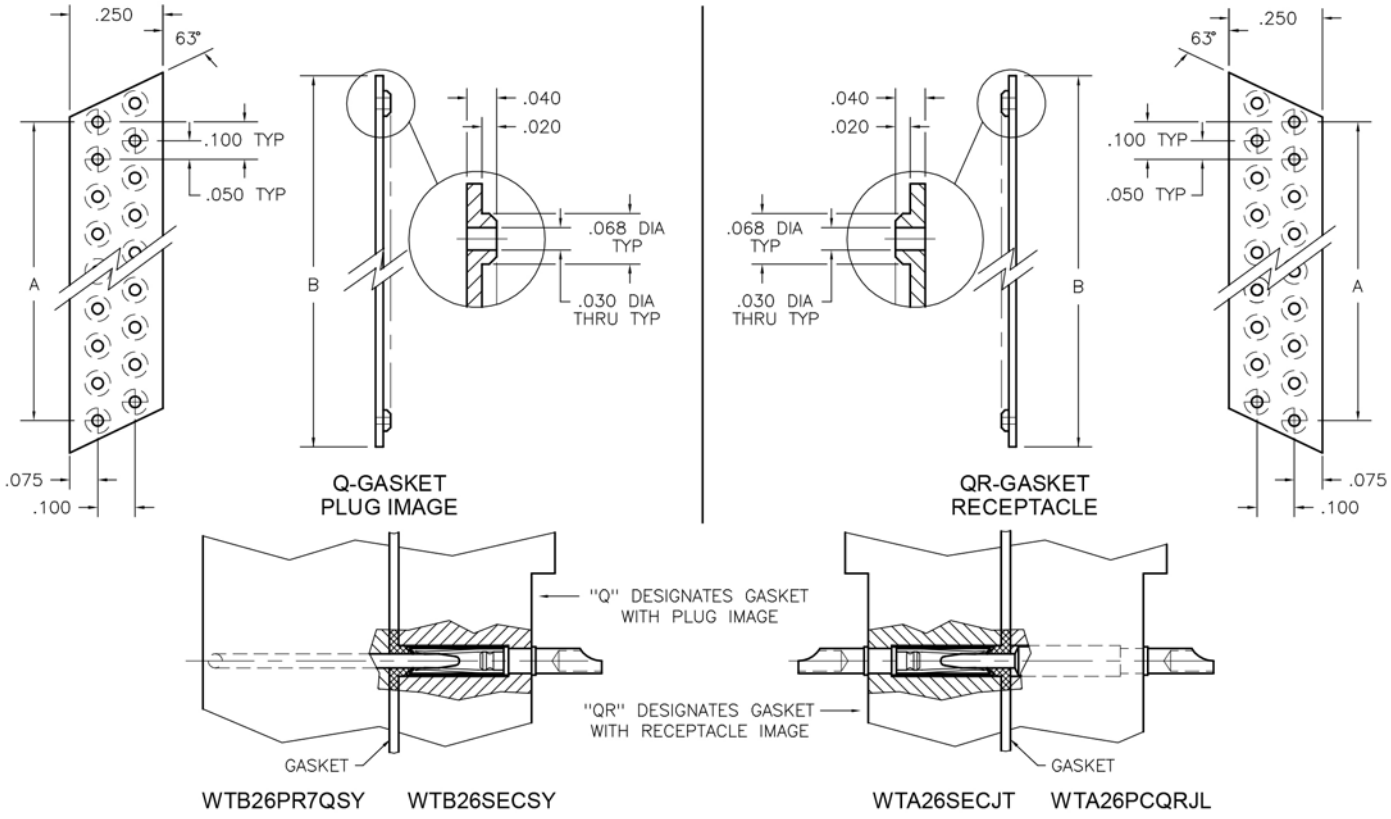

FOR CONNECTOR CODE	USE TWO GASKETS CODE NUMBER
WTB90PR	WTB45Q
WTB100PR	WTB50Q
WTB120PR	WTB60Q

NOTES:
1. DUE TO THE ELASTICITY OF SILICONE RUBBER, A & B DIMENSIONS ARE FOR REFERENCE ONLY. THE ACCUMULATIVE TOLERANCE FOR LINEAR HOLE CENTERS SHALL BE NO MORE THAN ±.030 FOR EACH INCH OF SPACE BETWEEN END HOLES.
2. MATERIAL: SILICONE RUBBER, CLASS 2A OR 2B, GRADE 50 PER A-A-59588.
3. FOR USE WITH MALE (PIN) CONNECTORS ONLY.
4. CHECK SALES DEPARTMENT FOR COMBINATION CONNECTOR AND GASKET CODES. EXAMPLE: WTB26PR7QSY-1.

CODE CHART						
NO. OF CONTACTS	A	B	GASKET CODE (PLUG IMAGE)	FOR USE WITH	GASKET CODE (RCPT IMAGE)	FOR USE WITH
10	.400	.625	WTB10Q	WTA-P-JT JTA JTL WTAV-P-SY SYL WTB-PR-SY WTBV-P-SY	WTB10QR	WTA-P-J JL WTAX-P-SY SYL
14	.600	.825	WTB14Q		WTB14QR	
20	.900	1.125	WTB20Q		WTB20QR	
24	1.100	1.325	WTB24Q		WTB24QR	
26	1.200	1.425	WTB26Q		WTB26QR	
30	1.400	1.625	WTB30Q		WTB30QR	
36	1.700	1.925	WTB36Q		WTB36QR	
40	1.900	2.125	WTB40Q		WTB40QR	
44	2.100	2.325	WTB44Q		WTB44QR	
50	2.400	2.625	WTB50Q		WTB50QR	
54	2.600	2.825	WTB54Q		WTB54QR	
56	2.700	2.925	WTB56Q		WTB56QR	
60	2.900	3.125	WTB60Q		WTB60QR	
66	3.200	3.425	WTB66Q		WTB66QR	
70	3.400	3.625	WTB70Q		———	

Downloaded from Arrow.com.

ACCESSORIES

FACE SEAL GASKETS FOR WG - WGA - WGE SERIES

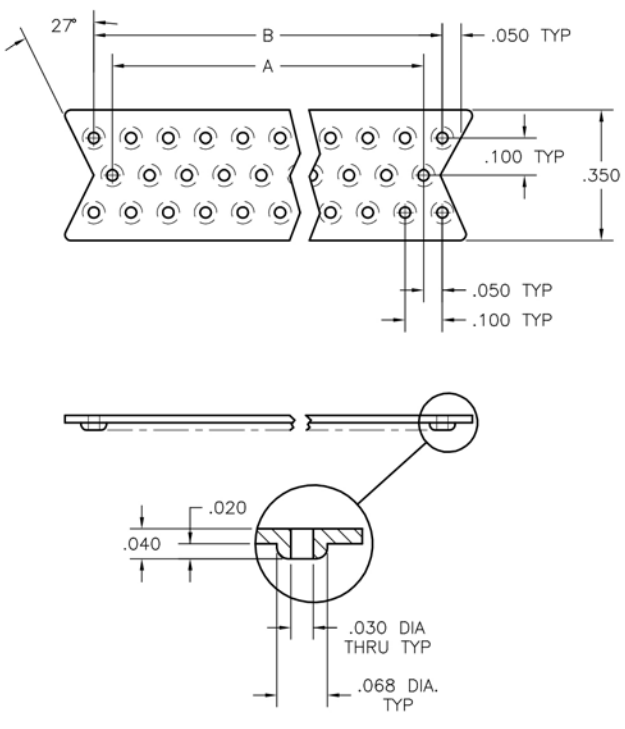


FIGURE 1

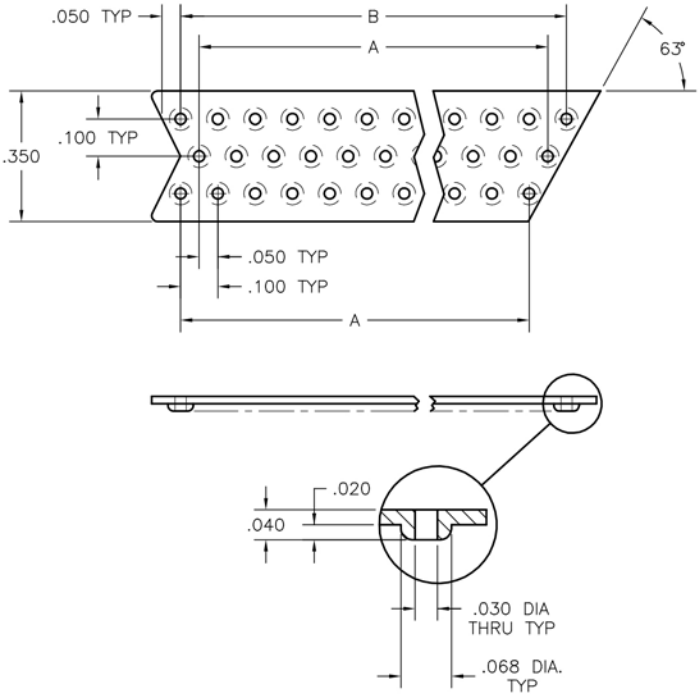


FIGURE 2

NOTES:
1. DUE TO THE ELASTICITY OF SILICONE RUBBER, A & B DIMENSIONS ARE FOR REFERENCE ONLY. THE ACCUMULATIVE TOLERANCE FOR LINEAR HOLE CENTERS SHALL BE NO MORE THAN ±.030 FOR EACH INCH OF SPACE BETWEEN END HOLES.
2. MATERIAL: SILICONE RUBBER, CLASS 2A OR 2B, GRADE 50 PER A-A-59588.
3. FOR USE WITH MALE (PIN) CONNECTORS ONLY.
4. CHECK SALES DEPARTMENT FOR COMBINATION CONNECTOR AND GASKET CODES. EXAMPLE: WG80PR7QSY-1.


CODE CHART					
NO. OF CONTACTS	A	B	FIGURE	GASKET CODE	FOR USE WITH
50	1.500	1.600	1	WG50Q	WG-P-JT JTA JTL
80	2.500	2.600	1	WG80Q	
92	2.900	3.000	1	WG92Q	
61	1.900	2.000	2	WG61Q	WGV-P-SY SYL
52	1.600	1.700	2	WG52Q	
62	1.900	2.000	1	WG62Q	WG-PR-SY
70	2.200	2.300	1	WG70Q	

FOR CONNECTOR CODE	USE TWO GASKETS CODE NUMBER
WGA122PR	WG61Q
WG104PR	WG52Q
WG160PR	WG80Q

Downloaded from Arrow.com.

ACCESSORIES

HOODS FOR WTA - WTAX SERIES

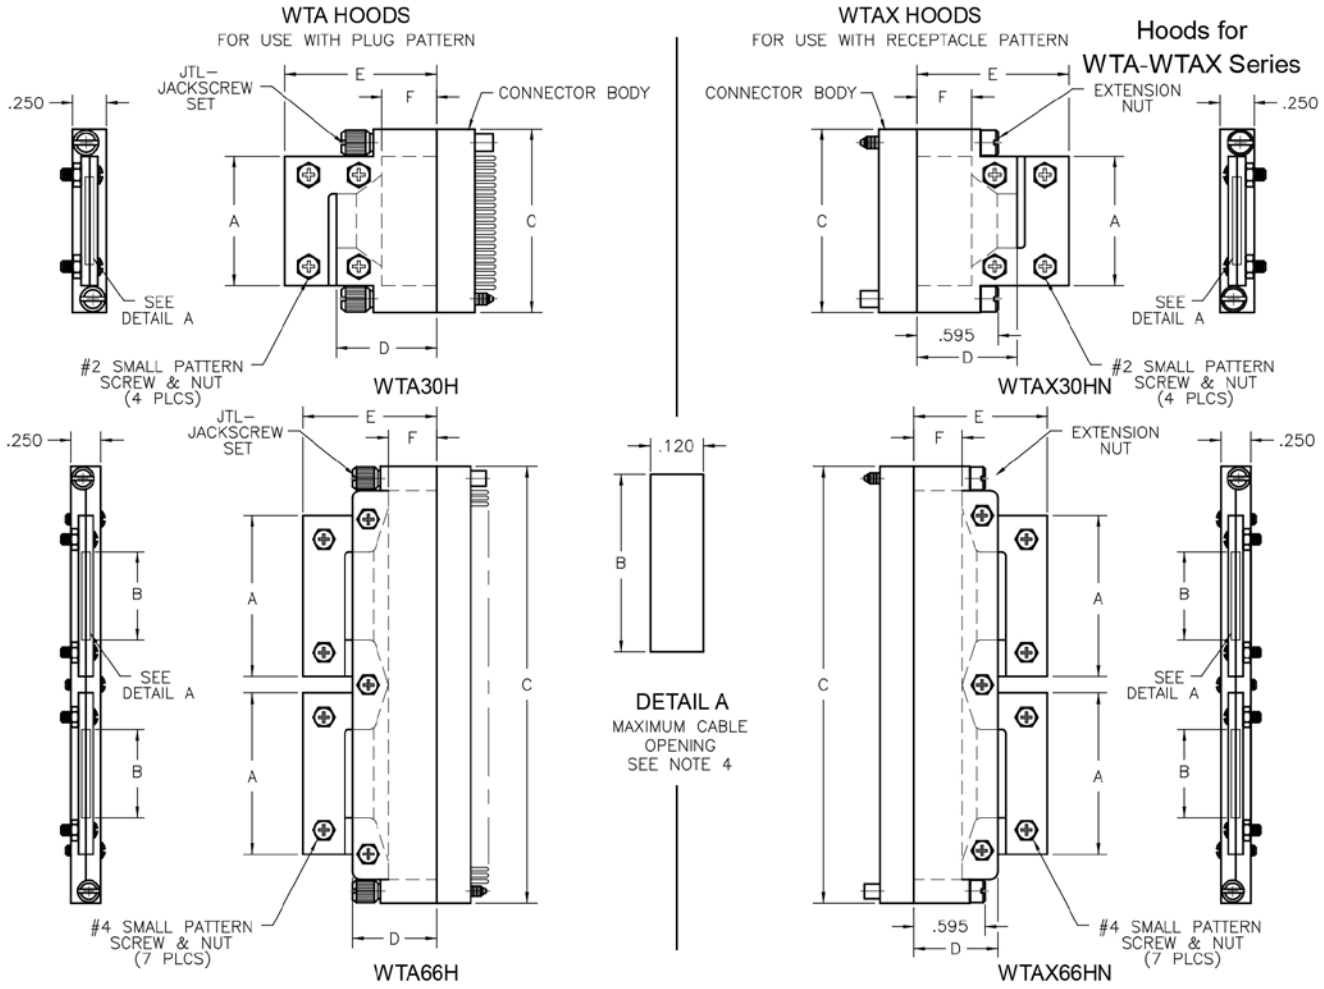

CODE CHART																	
WTA HOODS, PLUG IMAGE							WTAX HOODS, RECEPTACLE IMAGE							PART NO. DESIGNATION			
PART NO.	A	B +.015 −.025	C	D	E	F	PART NO.	A	B +.015 −.025	C	D	E	F	SERIES	SIZE	HOOD DESIGNATION	FOR HARDWARE TYPE
WTA20H	.950	.400	1.350	.700	1.115	.400	———	———	———	———	.700	1.115	.400	WTA	20 THRU 70	H	JTL – LONG TURNING JACKSCREW SET
WTA30H	1.450	.800	1.850				WTAX30H	1.450	.800	1.850							
WTA36H	1.300	.750	2.150				WTAX36H	1.300	.750	2.150							
WTA40H	1.500	.950	2.350				WTAX40H	1.500	.950	2.350							
WTA44H	1.700	1.150	2.550				WTAX44H	1.700	1.150	2.550							
WTA50H	2.000	1.450	2.850				WTAX50H	2.000	1.450	2.850				WTAX	30 THRU 70	HN	J – FIXED JACKSCREW SET SY – GUIDE SET
WTA54H	2.200	1.650	3.050				WTAX54H	1.950	1.400	3.050							
WTA56H	2.060	1.500	3.150				WTAX56H	2.060	1.500	3.150							
WTA60H	1.240	.700	3.350				WTAX60H	1.240	.700	3.350							
WTA66H	1.350	.735	3.650				WTAX66H	1.345	.735	3.650							
WTA70H	1.445	.885	3.850				WTAX70H	1.445	.885	3.850							

NOTES:
1. DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE.
2. HOODS ARE SUPPLIED UNASSEMBLED.
3. HOOD MATERIAL: POLYETHYLENE, HIGH DENSITY
   CLAMPING SCREWS AND NUTS: STAINLESS STEEL
4. THE TOP CLAMPS ARE FLEXIBLE TO ACCOMMODATE MAXIMUM CABLE BUNDLE.
5. CHECK WITH SALES DEPARTMENT FOR SIZES NOT LISTED.
6. SCREWS SUPPLIED ARE CROSS–RECESS ONLY.
7. TOLERANCES: ±.015
8. SIZES 20–30 USE #2 SMALL PATTERN SCREW & NUT.
   SIZES 36–70 USE #4 SMALL PATTERN SCREW & NUT.
9. HOODS CANNOT BE USED ON CONNECTORS SPECIFYING THE –C45 OPTION CODE.

EXAMPLES:
WTA**H = DESIGNATES HOOD USED WITH JTL HARDWARE
WTA**HN = DESIGNATES HOOD USED WITH J OR SY HARDWARE (INCLUDES EXTENSION NUTS).
WTAHN = DESIGNATES EXTENSION NUTS ONLY.


** = DESIGNATES CONNECTOR SIZE. SEE PAGE WA–7 FOR ADDITIONAL INFORMATION ON EXTENSION NUTS.

Downloaded from Arrow.com.


ACCESSORIES

HOODS FOR WTD - WTDX SERIES

WTD HOODS
FOR USE WITH PLUG PATTERN

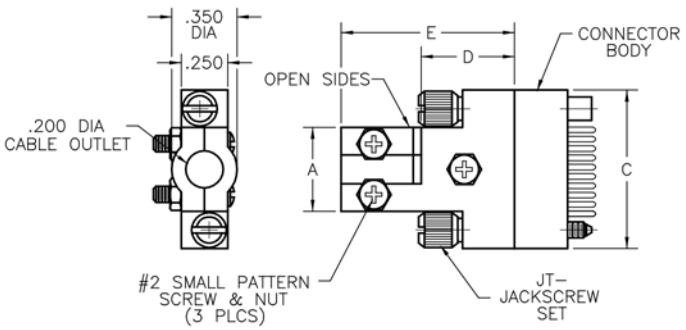


WTD10H

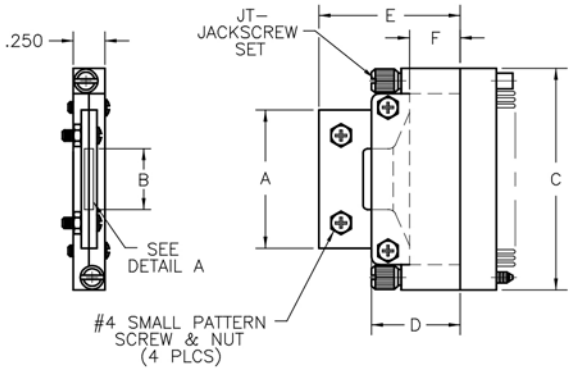


WTD26H

WTDX HOODS
FOR USE WITH RECEPTACLE PATTERN

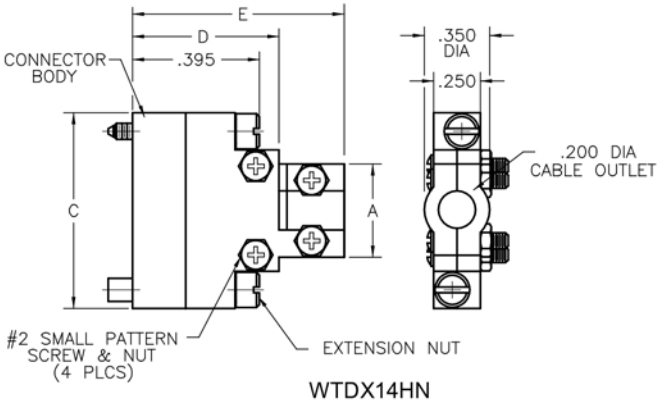

WTDX14HN



DETAIL A
MAXIMUM CABLE OPENING
SEE NOTE 4

PART NO. DESIGNATION			
SERIES	SIZE	HOOD DESIGNATION	FOR HARDWARE TYPE
WTD	10, 14 & 26	H	JT – TURNING JACKSCREW SET
WTDX		HN	J – FIXED JACKSCREW SET SY – GUIDE SET

CODE CHART													
WTD HOODS, PLUG IMAGE							WTDX HOODS, RECEPTACLE IMAGE						
PART NO.	A	B +.015 –.025	C	D	E	F	PART NO.	A	B +.015 –.025	C	D	E	F
WTD10H	.450	——	.850	.500	.850	.200	WTDX10H	.450	——	.850	.500	.850	——
WTD14H	.500	——	1.050				WTDX14H	.500	——	1.050			——
WTD26H	1.090	.540	1.650		.915		WTDX26H	1.250	.600	1.650		.915	.200

NOTES:
1. DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINE.
2. HOODS ARE SUPPLIED UNASSEMBLED.
3. HOOD MATERIAL: POLYETHYLENE, HIGH DENSITY
   CLAMPING SCREWS AND NUTS: STAINLESS STEEL
4. THE TOP CLAMPS ARE FLEXIBLE TO ACCOMMODATE MAXIMUM CABLE BUNDLE.
5. CHECK WITH SALES DEPARTMENT FOR SIZES NOT LISTED.
6. SEE PAGE W-114 FOR WTA-WTAX SERIES HOODS
7. IF USED WITH WTA OR WTAX CONNECTORS IS DESIRED, LEAD DRESS AREA WILL BE AT A MINIMUM.
8. SCREWS SUPPLIED ARE CROSS–RECESS ONLY.
9. TOLERANCES: ±.015
10. SIZES 10 & 14 USE #2 SMALL PATTERN SCREW & NUT. SIZE 26 USE #4 SMALL PATTERN SCREW & NUT.
11. HOODS CANNOT BE USED ON CONNECTORS SPECIFYING THE –C45 OPTION CODE.


EXAMPLES:
WTD**H = DESIGNATES HOOD USED WITH JT HARDWARE
WTD**HN = DESIGNATES HOOD USED WITH J OR SY HARDWARE (INCLUDES EXTENSION NUTS).
WTDHN = DESIGNATES EXTENSION NUTS ONLY.

** = DESIGNATES CONNECTOR SIZE. SEE PAGE WA–7 FOR ADDITIONAL INFORMATION ON EXTENSION NUTS.

Downloaded from Arrow.com.

ACCESSORIES


ADAPTER SLEEVE FOR SOLDER CUP CONTACTS

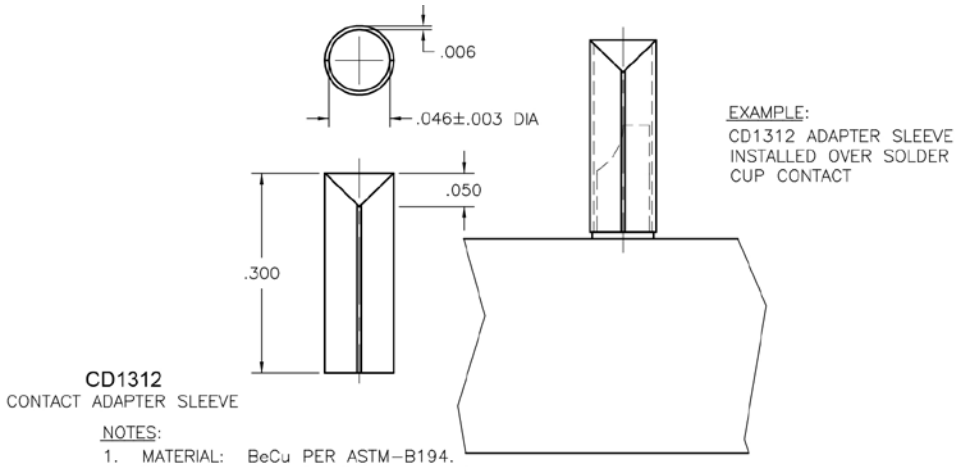

CD1312
CONTACT ADAPTER SLEEVE


NOTES:
1. MATERIAL: BeCu PER ASTM-B194.
   FINISH: GOLD PLATE PER MIL-G-45204
2. CONTACT ADAPTER SLEEVE IS DESIGNED TO ACCEPT #20 WIRE.
3. WITH USE OF THE ADAPTER SLEEVE, EFFECTIVE DIAMETER IS EXPANDED TO .050 I.D.
4. THE CD1312 WILL ALSO ACCEPT: 3 TWISTED OF #28 WIRE
   2 TWISTED OF #26 WIRE

COAX REMOVAL TOOL FOR WTC CONTACTS

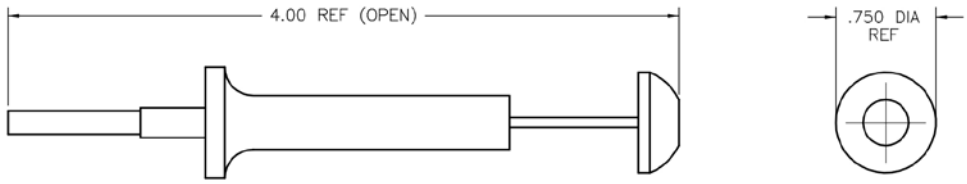


TR2679
REMOVAL TOOL

EXTENSION NUTS

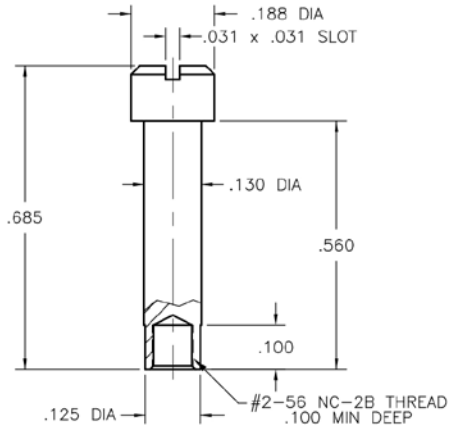

WTAHN
FOR USE WITH WTAH & WTAXH HOODS. SEE PAGE WA-5.

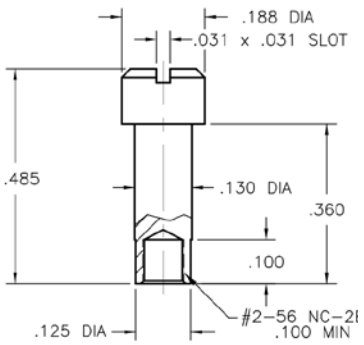


WTDHN
FOR USE WITH WTDH & WTDXH HOODS. SEE PAGE WA-6.

NOTES:
1. EXTENSION NUTS ARE NECESSARY FOR HOODS WHEN CONNECTOR INVOLVED HAS FIXED HARDWARE. FOR EXAMPLE: GUIDE SET (SY) OR FIXED JACKSCREW SET (J).
2. TWO EXTENSION NUTS ARE REQUIRED PER HOOD.
3. MATERIAL: STAINLESS STEEL, TYPE 303.
4. INSTALLATION: REMOVE NUT FROM HARDWARE ON TERMINATION SIDE OF CONNECTOR USING TN1680, NUT SPANNER WRENCH. INSTALL EXTENSION NUT IN ITS PLACE. FOR INFORMATION ON TN1680 SEE WA-8.

Downloaded from Arrow.com.

ACCESSORIES


NUT SPANNER WRENCHES

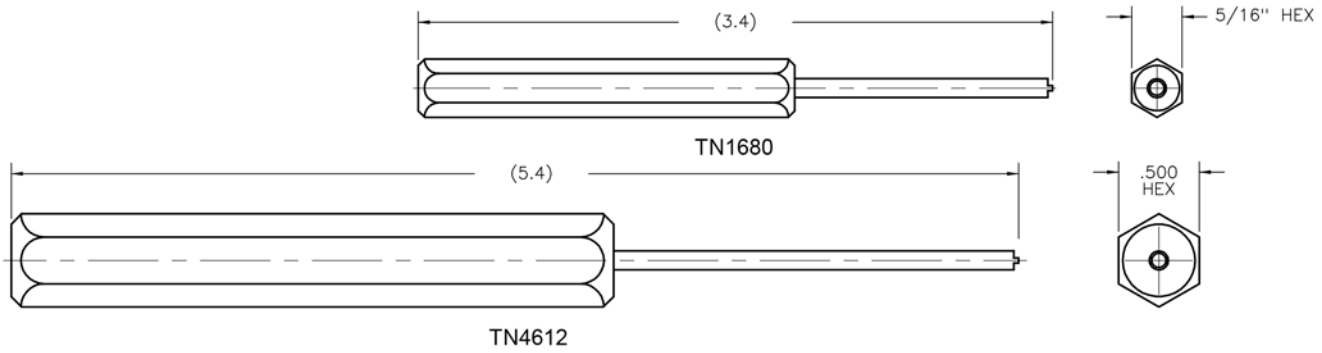

USING EITHER OF THE SPANNER WRENCHES SHOWN ABOVE, GUIDE SETS MAY BE REMOVED AND REPOSITIONED IN ANY OF THE 64 POLARIZING POSITIONS. REFER TO PAGE W-127 FOR POLARIZATION CHART.


CAUTION: WHEN POLARIZED POSITIONS ARE CHANGED, APPLY LOCTITE 242 ® TO THREADS.


IF SPANNER NUTS ARE DIFFICULT TO REMOVE DUE TO HARDENED LOCTITE ®, APPLY HEAT (300° F) TO NUT AREA FOR ONE HOUR AND REPEAT REMOVAL OPERATION.



THE 1/4" DRIVE SPANNER WRENCH ABOVE IS DESIGNED FOR USE IN TORQUE WRENCHES


INSERTION AND REMOVAL TOOLS

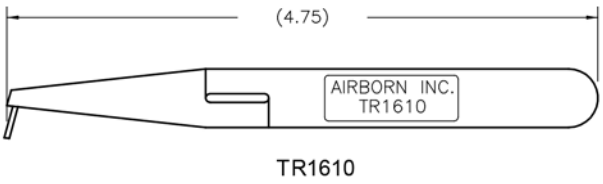


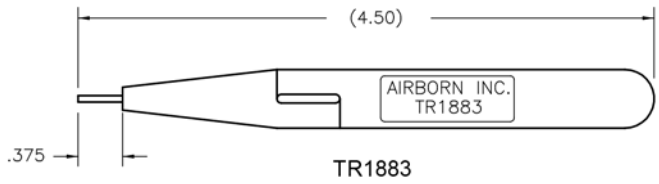

CRIMP TOOLS AND POSITIONERS

TC1652 - CRIMP TOOL
REF M22520/2-01
TP1653 - POSITIONER
REF M22520/2-06

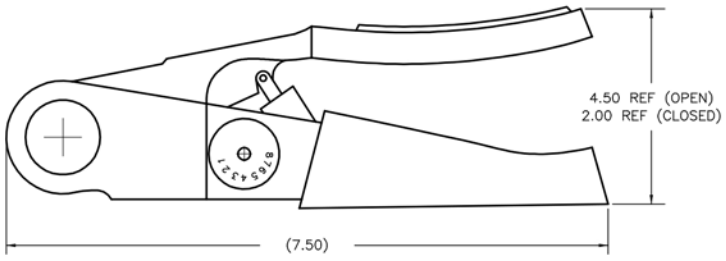



INSULATION STRIPPING
EXPOSE .135/.145 BARE WIRE LENGTH FOR INSERTION INTO CONTACT.


TOOL SELECTION TABLE		
CONTACT	TOOL NO.	POSITIONER
WTK2222P	TC1652	TP1985
WTK2222S		TP1653
WTK2220S657		TP2435
WTK2220P657		TP13784

Downloaded from Arrow.com.


CONTACTS

#22 PINS AND SOCKETS FOR WT, WTA, WTB, WTK, WG AND WGA SERIES

PINS




PC PC Pin, straight, solder cup




PD
PD9 Pin, straight, dip solder, .140"
PD11 Pin, straight, dip solder, .172"




PF
PF3 Pin, straight, flex circuit, .050"
PF6 Pin, straight, flex circuit, .093"



PW PW40 Pin, straight, wire wrap®, .625"




PR
PR5 Pin, right angle, dip solder, .081" x .025" dia
PR7 Pin, right angle, dip solder, .109" x .025" dia
PR9 Pin, right angle, dip solder, .140" x .025" dia
PR11 Pin, right angle, dip solder, .172" x .025" dia
PR15 Pin, right angle, dip solder, .234" x .025" dia
PRD4 Pin, right angle, dip solder, .063" x .030" dia
PRD7 Pin, right angle, dip solder, .109" x .030" dia
PRD8 Pin, right angle, dip solder, .125" x .030" dia




PRW
PRW32 Pin, right angle, wire wrap®, .500"
PRW34 Pin, right angle, wire wrap®, .531"
PRW40 Pin, right angle, wire wrap®, .625"

SOCKETS




SAC SAC Socket, straight, solder cup, closed entry




SAD
SAD7 Socket, straight, dip solder, .109"
SAD9 Socket, straight, dip solder, .140"
SAD11 Socket, straight, dip solder, .172"
SAD15 Socket, straight, dip solder, .234"
SAD16 Socket, straight, dip solder, .250"



SAF
SAF3 Socket, straight, flex circuit, .050"
SAF6 Socket, straight, flex circuit, .093"



SAG
SAG7 Socket, straight, dip solder, .109"
SAG9 Socket, straight, dip solder, .140"
SAG11 Socket, straight, dip solder, .172"

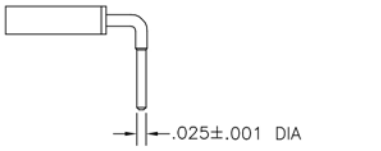

SAR
SAR7 Socket, right angle, dip solder, .109"
SAR9 Socket, right angle, dip solder, .140"
SAR11 Socket, right angle, dip solder, .172"




SAW
SAW24 Socket, straight, wire wrap®, .375"
SAW40 Socket, straight, wire wrap®, .625"

Downloaded from Arrow.com.


CONTACTS

CRIMP REMOVABLE FOR WTDX, WTDXA, WTK AND WTKA SERIES
WGDX, WGCXA, WGK AND WGKA SERIES

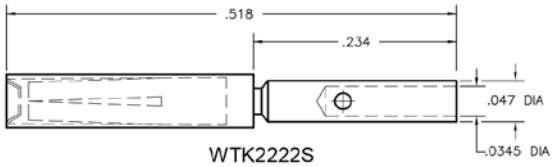


WTK2222S
SOCKET, CRIMP REMOVABLE

WTK2222SA
SOCKET, LOW FORCE, CRIMP REMOVABLE,
22 GAGE BARREL

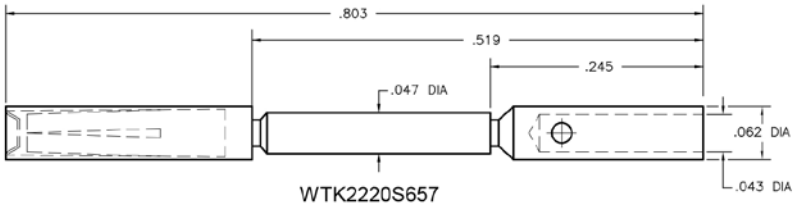


WTK2220S657
SOCKET, CRIMP REMOVABLE,
20 GAGE BARREL

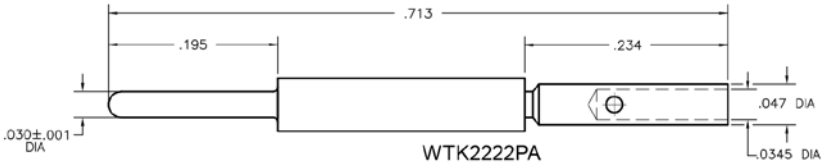


WTK2222PA
PIN, CRIMP REMOVABLE,
22 GAGE BARREL

Note: When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.

COAX

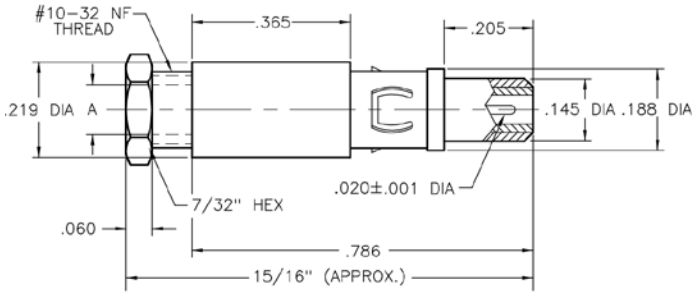


COAX, MALE

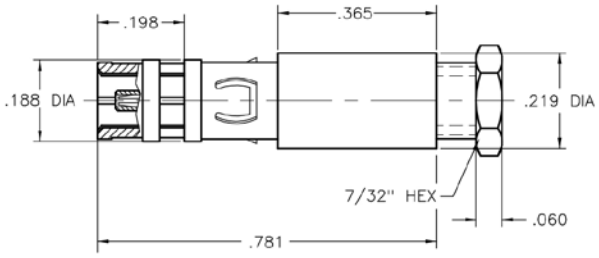

COAX, FEMALE

PART #	DESCRIPTION	DIA "A"	CABLE TYPE	PART #	DESCRIPTION
WTC188P	COAX, STRAIGHT, PIN	.115	RG174, RG188, RG316	WTC188S	COAX, STRAIGHT, SOCKET
WTC196P		.089	RG178, RG196	WTC196S	
WTC085P			SEMI–RIGID, .085–50 OHM	WTC085S	

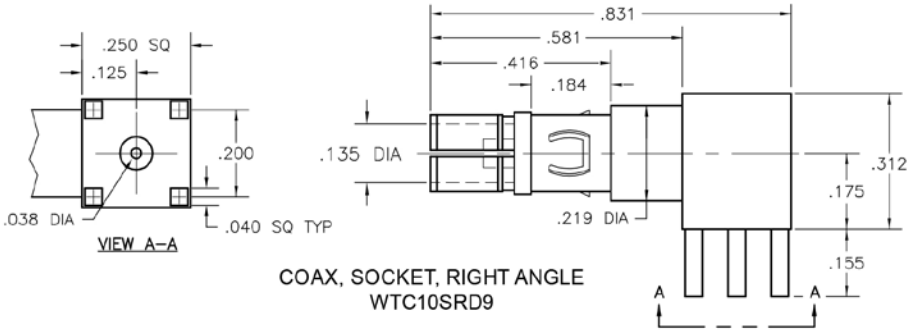


COAX, SOCKET, RIGHT ANGLE
WTC10SRD9


Downloaded from Arrow.com.

JACKSETS

Fixed Jacksets

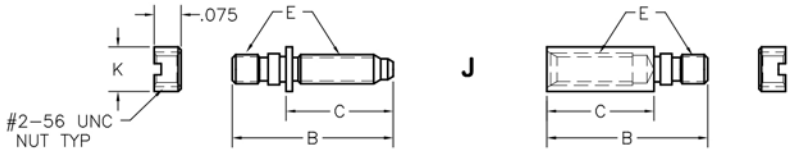


J	Fixed jackset
JFF	Two fixed jacksockets
JFM	Fixed jackset, reversed
JMM	Two fixed jackscrews

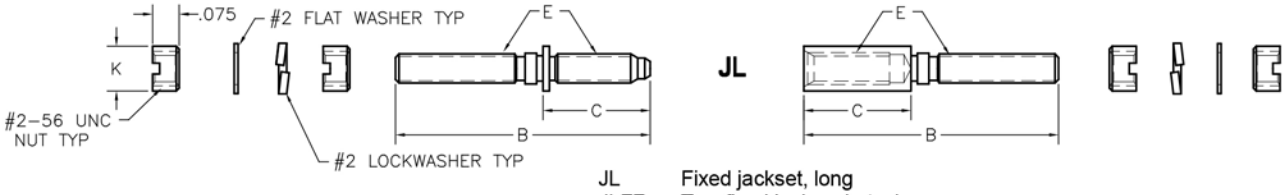


JL	Fixed jackset, long
JLFF	Two fixed jacksockets, long
JLFM	Fixed jackset, long, reversed
JLMM	Two fixed jackscrews, long


Turning Jacksets

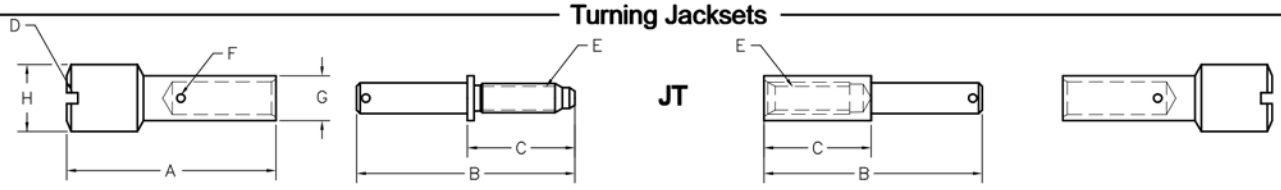


JT	Turning jackset, .500"
JTFF	Two turning jacksockets, .500"
JTFM	Turning jackset, reversed, .500"
JTMM	Two turning jackscrews, .500"

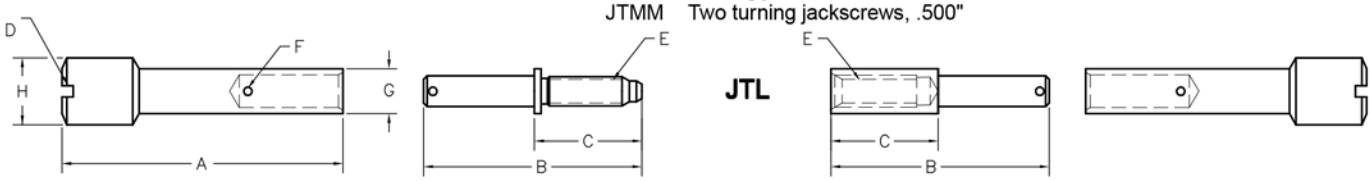

JTL	Turning jackset, .700"
JTLFF	Two turning jacksockets, .700"
JTLFM	Turning jackset, reversed, .700"
JTLMM	Two turning jackscrews, .700"

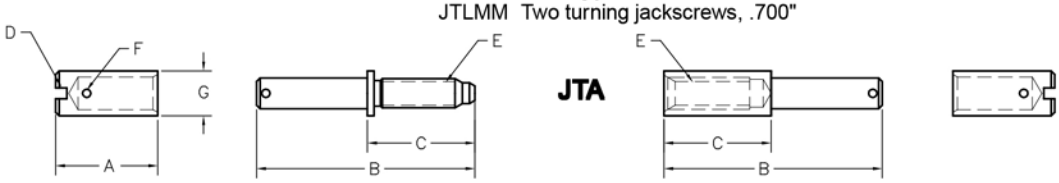


JTA	Turning jackset, .200"
JTAFF	Two turning jacksockets, .200"
JTAFM	Turning jackset, reversed, .200"
JTAMM	Two turning jackscrews, .200"

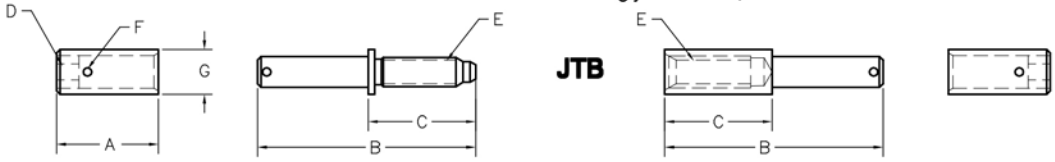

JTB	Turning jackset, .200"
JTBFF	Two turning jacksockets, .200"
JTBFM	Turning jackset, reversed, .200"
JTBMM	Two turning jackscrews, .200"

Downloaded from Arrow.com.


JACKSETS

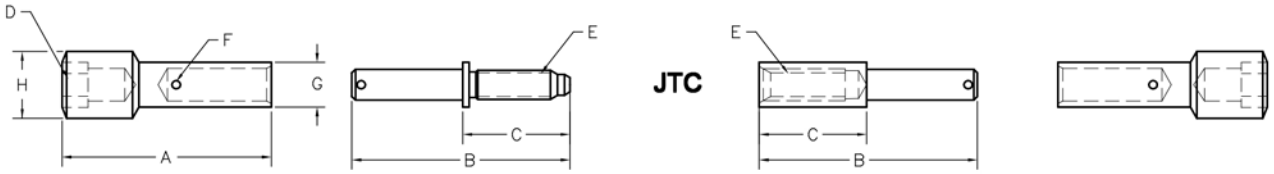

JTC Turning jackset, .500"
JTCFF Two turning jacksockets, .500"
JTCFM Turning jackset, reversed, .500"
JTCMM Two turning jackscrews, .500"

GROOVE PIN

SEE NOTE 1




Notes:
1. Groove pin secures knob to jackscrew and jacksocket on turning hardware.
2. For nut spanner wrench, refer to Data Sheet on WA-9.
3. When installing fixed jacksets, apply Loctite® to threads.
4. Under normal conditions, jackscrews are at socket contact position #1, and jacksockets are at pin contact position #1.
5. Spanner nuts, lockwashers and flat washers shall be supplied separately.

DIMENSIONS										
HARDWARE TYPE	FOR MOLDING TYPE	A	B	C	D	E	F	G	H	K
J	WTA, WTB	—	.450	.300	—	#2–56 UNC THD	—	.125 DIA	—	.125 DIA
JL	WTA, WTB	—	.712		—		—		—	.125 DIA
JT	WTA, WTB WTDX, WTK	.585	.610 .860		.031 x .031 SLOT		.033 DIA		.187 DIA	—
JTA	WTA, WTB WTDX, WTK	.285	.610 .860		.031 x .031 SLOT				.125 DIA	—
JTB	WTA, WTB WTDX, WTK	.285	.610 .860		5/64 INT HEX				.125 DIA	—
JTC	WTA, WTB WTDX, WTK	.585	.610 .860		7/64 INT HEX				.187 DIA	—
JTL	WTA, WTB WTDX, WTK	.785	.610 .860		.031 x .031 SLOT				.187 DIA	—


Downloaded from Arrow.com.

GUIDE SETS


Guide Sets

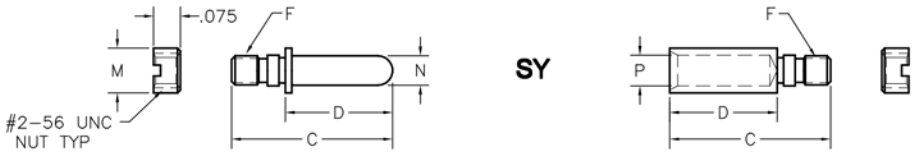

SY Guide set
SYFF Two guide sockets
SYFM Guide set, reversed
SYMM Two guide pins

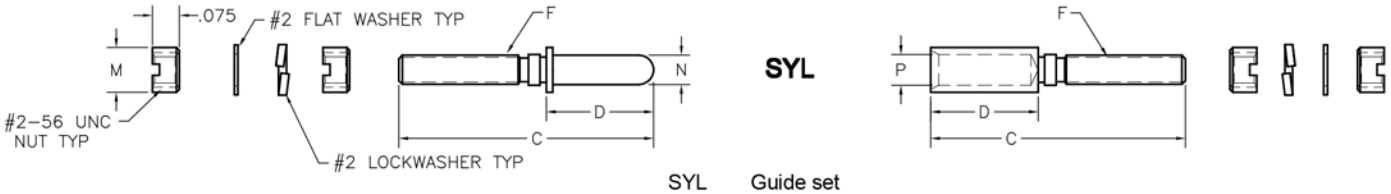

SYL Guide set
SYLFF Two guide sockets
SYLFM Guide set, reversed
SYLMM Two guide pins

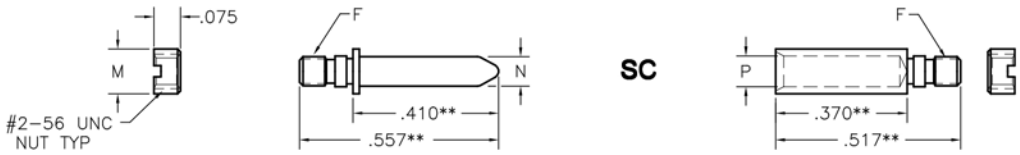

Guide Sets, Polarized





Notes:
1. For polarized "D" shaped guides, see W-126. Polarizing also available for SYL- and SC- guide sets. To order, use P/N WTBSY-* , WTBSYL-* or WTBSC-*. See W-126 for dash number requirement (example WTBSY-33).
2. For universal type test connector, see WA-17.
3. For nut spanner wrench, refer to Data Sheet on WA-9.
4. When installing guide sets, apply Loctite® to threads.
5. Under normal conditions, jackscrews are at socket contact position #1, and jacksockets are at pin contact position #1.
6. Spanner nuts, lockwashers and flat washers shall be supplied separately.

DIMENSIONS							
PART NUMBER	FOR MOLDING TYPE	C	D	F	M	N	P
WTBSC	WTB COAX	**	**	#2–56 UNC THD	.125 DIA	.082 DIA	.086 DIA
WTBSY	WTA,WTB,WG,WGA	.450	.300				
WTBTSY	WTBT	.653					
WTKSY	WTK	.712					
WTBSYL	WTA,WTB,WG						

Downloaded from Arrow.com.

HARDWARE AVAILABILITY BY CONNECTOR SERIES

WTA /B WG – RECEPTACLE BODY HEIGHT = 0.335												
STYLE	**J**	**JL**	**SY**	**SY-***	**SYL**	**SYL-***	**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.247	---	---	0.247	0.247	0.200	0.200	0.230	0.500	0.500	0.700
WTB / WG – PLUG BODY HEIGHT = 0.400												
STYLE	**J**	**JL**	**SY**	**SY-***	**SYL**	**SYL-***	**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.182	---	---	0.182	0.182	0.135	0.135	0.165	0.435	0.435	0.635
WGA – RECEPTACLE BODY HEIGHT = 0.375												
STYLE	**J**	**JL**	**SY**	**SY-***	**SYL**	**SYL-***	**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.207	---	---	0.207	0.207	0.160	0.160	0.190	0.460	0.460	0.660
WGA – PLUG BODY HEIGHT = 0.400												
STYLE	**J**	**JL**	**SY**	**SY-***	**SYL**	**SYL-***	**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.182	---	---	0.182	0.182	0.135	0.135	0.165	0.435	0.435	0.635
WGR92 – RECEPTACLE BODY HEIGHT = 0.375												
STYLE	**J**	**JL**	**SY**	**SY-***	**SYL**	**SYL-***	**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.207	---	---	0.207	0.207	0.160	0.160	0.190	0.460	0.460	0.660
WGR92 – PLUG BODY HEIGHT = 0.350												
STYLE	**J**	**JL**	**SY**				**JTA**	**JTB**	**JTD**	**JT**		
MATING	0.130	0.130	0.130				0.130	0.130	0.130	0.130		
TERMINATION	0.247	0.120	0.120				0.205	0.205	0.505	0.705		
WRD122 – RECEPTACLE BODY HEIGHT = 0.375												
STYLE	**J**	**JL**	**SY**	**SY-**	**SYL**	**SYL-***	**L-D65**	**JTA**	**JTB**	**JTC**	**JT**	**JTL**
MATING	0.130	0.130	0.130	0.130	0.130	0.130	---	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.207	---	---	0.207	0.207	0.230	0.160	0.160	0.460	0.460	0.660
WRD122 – PLUG BODY HEIGHT = 0.635												
STYLE	**JCL**	**SYCL**	**SYCL***									
MATING	0.130	0.130	0.130									
TERMINATION	---	---	---									
WRF100 – PLUG BODY HEIGHT = 0.430												
STYLE								**JTB**				**JTL**
MATING								0.130				0.130
TERMINATION								0.190				0.705
WRTBT – RECEPTACLE BODY HEIGHT = 0.525												
STYLE	**J**		**SY**	**SY-**			**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130		0.130	0.130			0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---		---	---			0.175	0.175	0.205	0.475	0.500	0.675
PA – RECEPTACLE BODY HEIGHT = 0.375												
STYLE	**SY**	**J**						**JTB**		**JT**		
MATING	0.175	0.160						0.175		0.175		
TERMINATION	0.200	0.277						0.314		1.054		
PA – PLUG BODY HEIGHT = 0.375												
STYLE	**SY**	**J**						**JTB**		**JT**		**JTL**
MATING	0.210	0.160						0.160		0.160		0.175
TERMINATION	0.273	0.277						0.314		1.054		1.170

Downloaded from Arrow.com.


HARDWARE AVAILABILITY BY CONNECTOR SERIES


WTK / WTDX – PLUG OR RECEPTACLE BODY HEIGHT = 0.585												
STYLE	**J**	**JL**	**SY**	**SY-***			**JTA**	**JTB**	**JTD**	**JT**	**JTC**	**JTL**
MATING	0.130	0.130	0.130	0.130			0.130	0.130	0.130	0.130	0.130	0.130
TERMINATION	---	0.247	---	---			0.200	0.200	0.230	0.500	0.500	0.700
WTA59 BODY HEIGHT = 0.285												
STYLE	**J**						**JTA**	**JTB**				
MATING	0.130						0.130	0.130				
TERMINATION	---						0.135	0.135				
WRBC – RECEPTACLE BODY HEIGHT = 0.530												
STYLE		**SC**	**SC-***									
MATING		0.145	0.145									
TERMINATION		---	---									
WRBC – PLUG BODY HEIGHT = 0.515												
STYLE		**SC**	**SC-***									
MATING		0.185	0.185									
TERMINATION		---	---									
WTB COAX – RECEPTACLE BODY HEIGHT = 0.335												
STYLE	**J**	**JL**	**SY**	**SY-***			**JTA**	**JTB**		**JT**		
MATING	0.130	0.130	0.130	0.130			0.130	0.130		0.130		
TERMINATION	---	0.247	---	---			0.200	0.200		0.500		
WTB COAX – PLUG BODY HEIGHT = 0.400												
STYLE	**J**	**JL**	**SY**				**JTA**	**JTB**		**JT**		
MATING	0.130	0.130	0.130				0.130	0.130		0.130		
TERMINATION	---	---	---				0.135	0.135		0.435		
WTB COAX – RECEPTACLE WITH SC HARDWARE (GUIDE SOCKET) BODY HEIGHT = 0.335												
STYLE			**SC**	**SC-***								
MATING			0.145	0.145								
TERMINATION			0.040	0.040								
WTB COAX – PLUG WITH SC HARDWARE (GUIDE PIN) BODY HEIGHT = 0.400												
STYLE			**SC**	**SC-***								
MATING			0.185	0.185								
TERMINATION			---	---								
WTB COAX – RECEPTACLE WITH SC HARDWARE (GUIDE PIN) BODY HEIGHT = 0.335												
STYLE			**SC**	**SC-***								
MATING			0.185	0.185								
TERMINATION			0.040	0.040								
WTB COAX – PLUG WITH SC HARDWARE (GUIDE SOCKET) BODY HEIGHT = 0.400												
STYLE			**SC**	**SC-***								
MATING			0.145	0.145								
TERMINATION			---	---								

Downloaded from Arrow.com.

POLARIZATION

D-Shaped Guide Sets

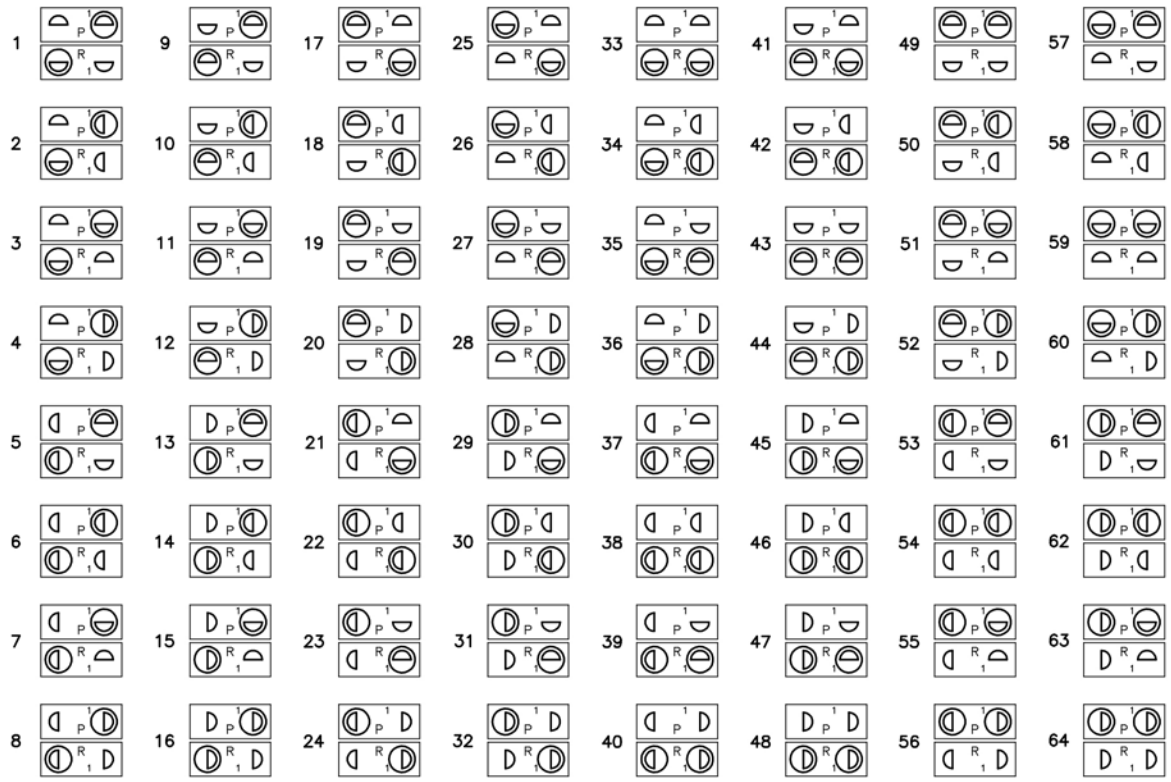

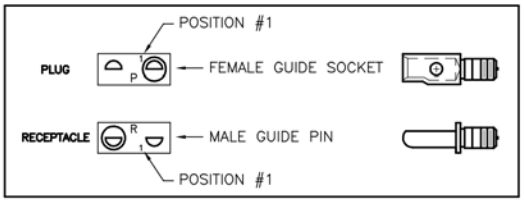

For optimum safety, use polarization number 1-6-11-16-17-22-27 or 32 when possible. These positions will exclude entry of guide pins at both ends of connectors when an attempt is made to mate incorrectly.

Select the appropriate two digit number above and include in the hardware code of the part number.

Example:

Plug	WTB20PR7SY-1
Receptacle	WTB20SECSY-1

To order polarization guide set only, use p/n WTBSY-1. This set consists of one "D-shaped" guide pin, one "D-shaped" guide socket and two spanner nuts (#2-56 UNC thread).

WTBSY-0 is WTBSY-1 except guide set is assembled in connector with the "-1" configuration without applying Loctite.®

To change polarization position of guide sets, order spanner nut wrench, part number TN1680 or TN4612. See W-118.

SERIES	NO. OF CONTACTS	POLARIZED GUIDE SET CODE	POLAR. GUIDE SET ONLY
WTB WG	10 THRU 160	SY–1 (EX. WTB70SACSY–1)	WTBSY–1
WTB COAX TYPE	20–3, 20–6	SC–1 (EX. WTB20–6SACSC–1)	WTBSC–1
WTK	10 THRU 70	SY–1 (EX. WTKA70SSY–1)	WTKSY–1

UNIVERSAL TEST CONNECTORS

The following test guide sets are designed to mate with any of several connectors having different polarization positions. Note that the square quide pin in test connector will enter the D-shaped socket in any of the four positions in which it may be installed. Likewise, the round guide socket in test connector will fit the D-shaped pin in any position.

-65		For positions -1 thru -16
-66		For positions -17 thru -32
-67P -67R		For positions -33 thru -48
-68P -68R		For positions -49 thru -64

When ordering -67 or -68 guide sets only, P (plug) or R (receptacle) must be noted. Ex: WTBSY-67R. Not required if guides are assembled in the connector. Ex: WTB70SACSY-67.

WTBSY-65, WTBSC-65 & WTKSY-65 is Universal Guide Set only, consisting of: one square guide pin
one round guide socket
two spanner nuts (#2-56 thd)


Downloaded from Arrow.com.

POLARIZATION

Polarizing Pin Applications

PIN CONTACT
–STRAIGHT THRU–
CONNECTOR BODY


WT, WTA
WTAV, WTBV



WTA**PCJTA443–1, –2...

SOCKET CONTACT


WT, WTA, WTAX,
WTB, WTBX



WTA**SAD9JL444–1, –2...

PIN CONTACT
–RIGHT ANGLE–
CONNECTOR BODY


WG, WGA, WGE,
WT, WTB

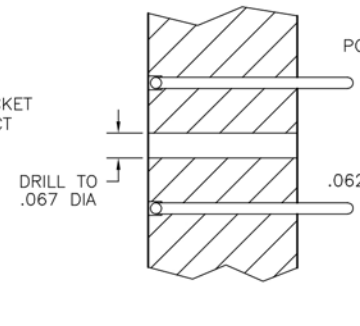

WTB**PR7SY515–1, –2...


SOCKET CONTACT

WG, WGA, WGE,
WT, WTA, WTAX,
WTB, WTDXA, WTKA




WTB**SACSY515–1, –2...

Notes:
1. CODE 443 - Polarizing pin installed in contact position noted by dash number.
2. CODE 444 - Contact position noted by dash number is left open.
3. Either pin or socket contacts can be used with 443 or 444.
4. ** = connector size
5. For additional dimensions and other information, refer to catalog data sheet of specific connector.

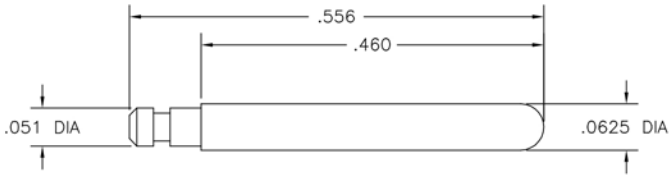


STAINLESS STEEL
POLARIZING PIN

SOCKET CONTACT
WTDXA, WTKA

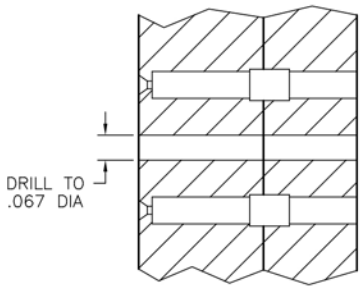

WTDXA**SJT478–1, –2...
WTKA**SSY478–1, –2...

SOCKET CONTACT
WTDXA, WTKA

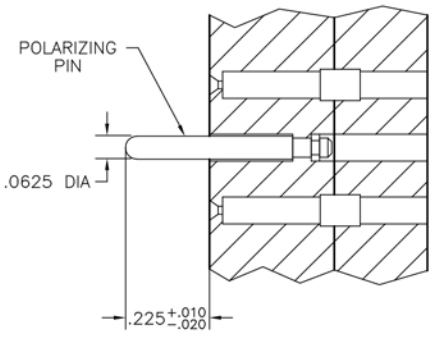

WTDXA**SJT515–1, –2...
WTKA**SSY515–1, –2...

Downloaded from Arrow.com.

creating connections for life

molex.com

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.
Order No. 987652-9561 Rev.1 ©2026 Molex

molex

Downloaded from Arrow.com.