

■ Features

- Power Rating: 96W
- Input Voltage: 100-277Vac
- Constant current and constant voltage hybrid output
- Output current (270mA-4000mA)
- Output current programmable with Near Field Communication controller
- Efficiency to 93%
- Compatible with 0-10V, PWM, Timer, Dim-to-off option, 12V/200mA AUX
- UL Class 2 options available, Type HL
- Lightning, OVP, SCP, OTP, & Over Current Protection
- $T_c=85^\circ\text{C}$
- IP67
- 5-year warranty
- Surge Protection: Diff: 6kV, Common: 10kV



*Near Field Communication controller



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor and outdoor applications

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency 110V/220V	Certification
L2WCP096S400ST*-XYZ	100-277Vac	96W	24-36V	1600mA	4000mA	90%/91%	UL/cUL
L2WCP096S267ST*-XYZ	100-277Vac	96W	36-48V	1070mA	2670mA	89%/91%	UL/cUL
L2WCP096S200ST-XYZ	100-277Vac	96W	48-80V	800mA	2000mA	91%/93%	UL/cUL
L2WCP096S120ST-XYZ	100-277Vac	96W	80-140V	480mA	1200mA	91%/93%	UL/cUL
L2WCP096S069ST-XYZ	100-277Vac	96W	140-233V	270mA	690mA	91%/92%	UL/cUL

*Class 2 output (Add-J for J-Box, EX.) L2WCP096SXXXST-J-XYZ; Contact Autec Sales for all options.)

Ordering options

XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming B=BLE Dimming

■ Technical Data

Input voltage range	100-277Vac
Frequency	47-63Hz
Power factor	> 0.99 @115Vac & 80~100% Full load, > 0.97 @230Vac & 80~100% Full load
Output voltage	24-233V
Output power	96W
Ripple and Noise	2.0%Vo

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com
 January 23, 2020

■ Technical Data(cont.)

Max input current	0.94A @115Vac, 0.45A@230Vac
Efficiency	90-93%
Line Regulation	±0.3%
Load Regulation	±0.6%
Inrush Current	65A @230Vac cold start +25°C
Dimming	0~10V/ PWM/ Timer, Dim-to-off option
THD	< 20%
Current Programmable	Yes
Output Current Programmable Range	270-4000mA
Over Current Protection	Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35~+70°C
Max T-case Temp.	85°C
Operating Humidity	10 ~ 100% RH non-condensing
Storage Temp., Humidity	-40 ~+85°C, 5 ~ 100% RH
Temp. Coefficient	±0.05%°C (0~50°C)
Vibration	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Dimensions	207x70x37mm
Packing	25pcs/carton
Weight	758.7g


■ Safety Compliance

Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC /25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C ($\geq 60\%$ load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024


Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


■ Derating curve

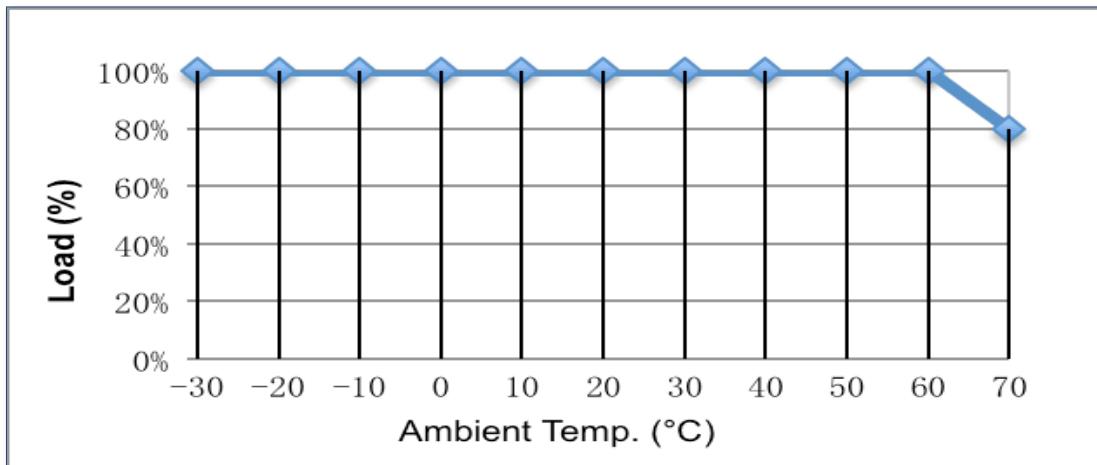


■ Static Characteristics

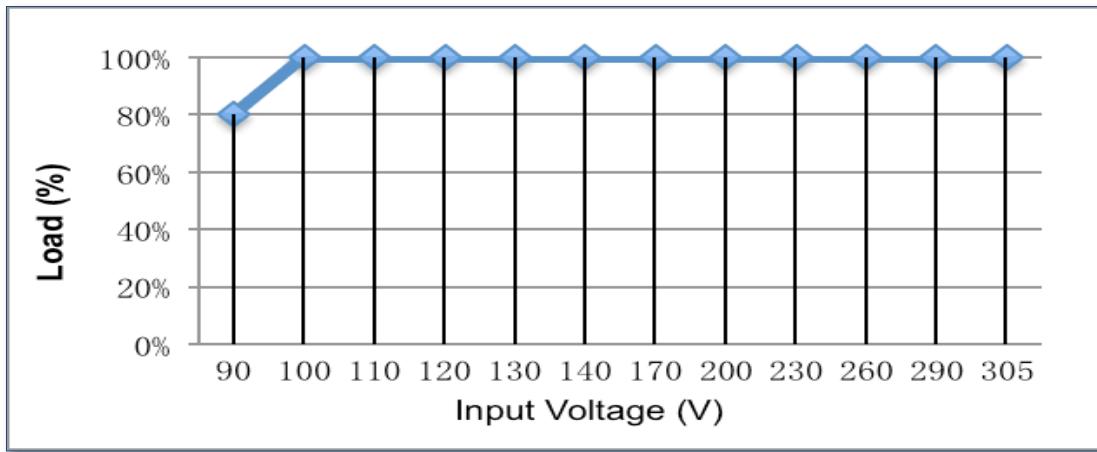


■ Power Factor vs. Output

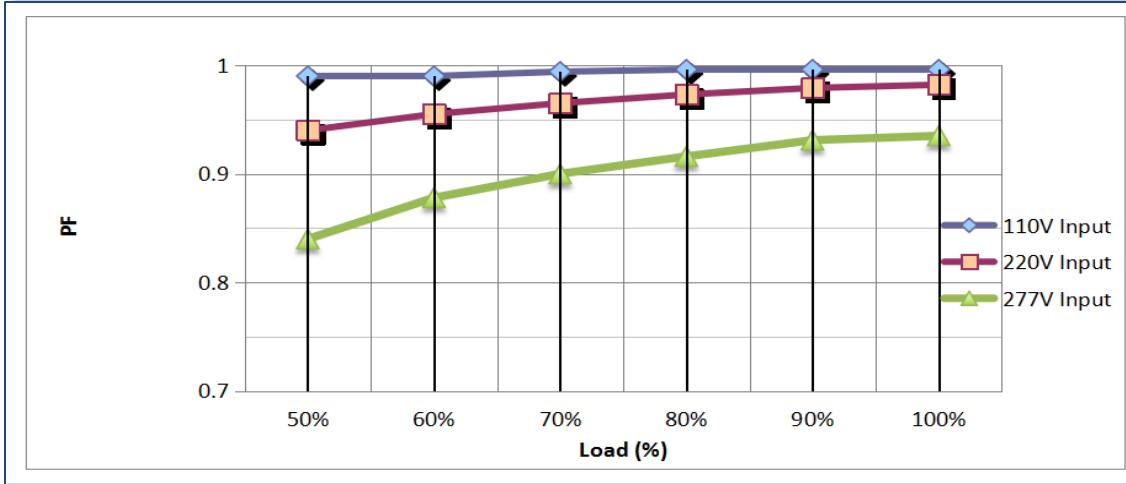


■ THD vs. Output

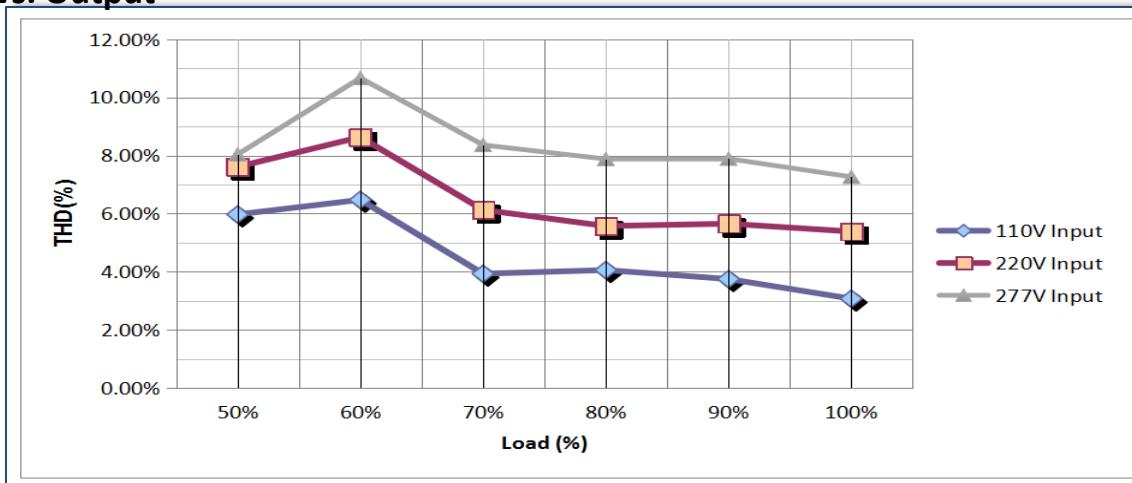

■ Efficiency vs Output

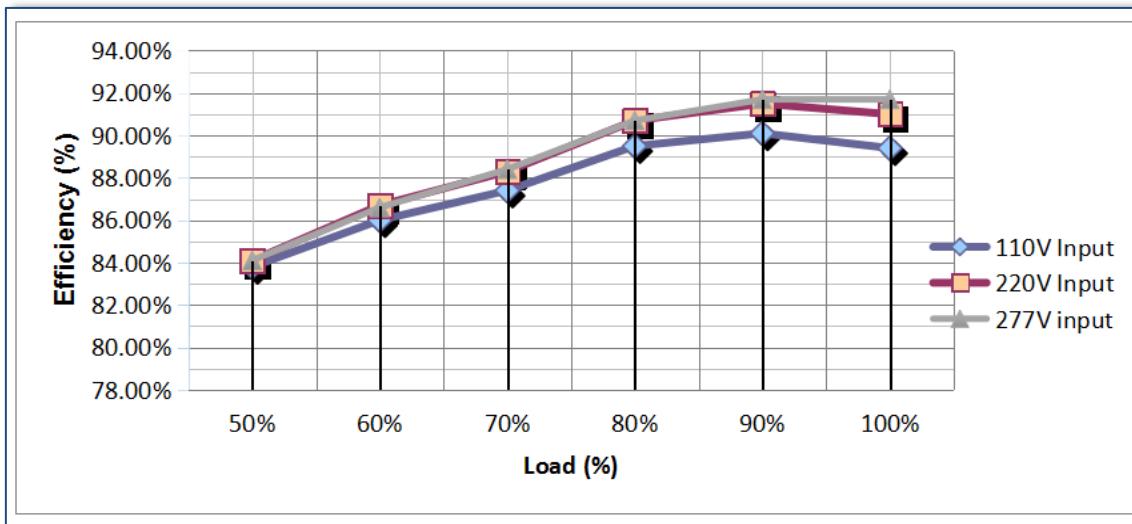

■ Lifetime vs Case Temp.

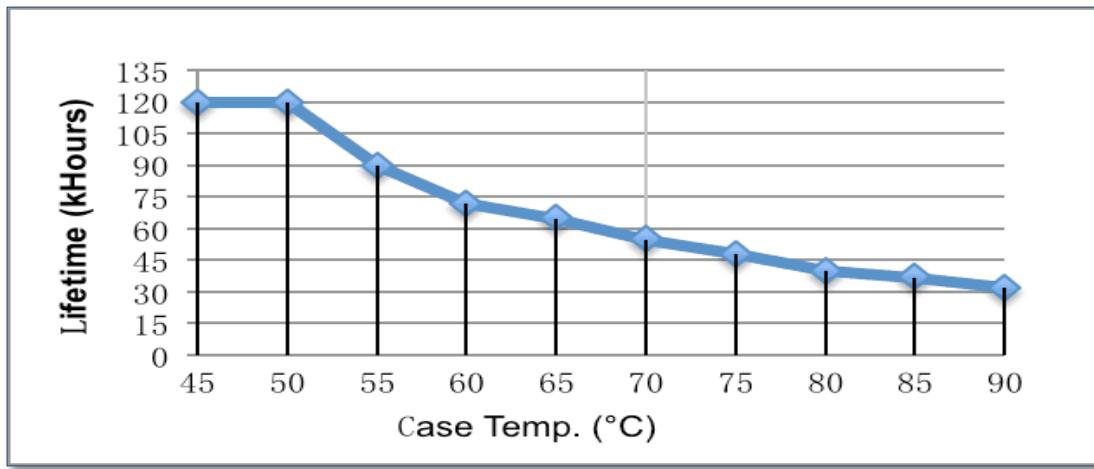

■ **Near Field Communication Controller**





NOTE:

1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

■ **Dimming**

0-10V Analog Dimming & PWM Dimming

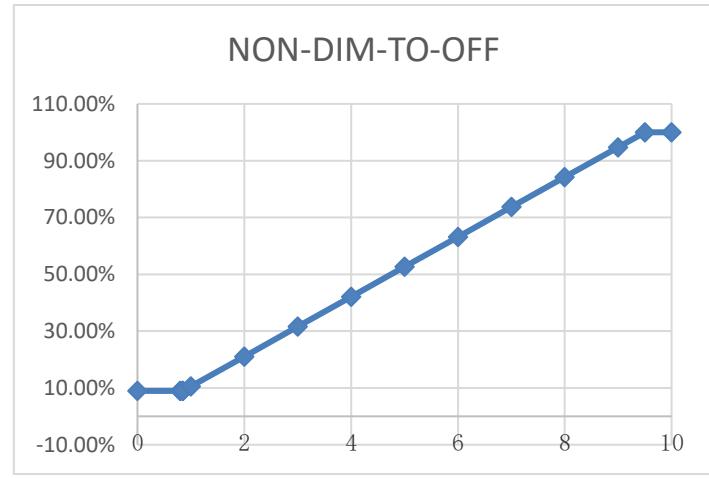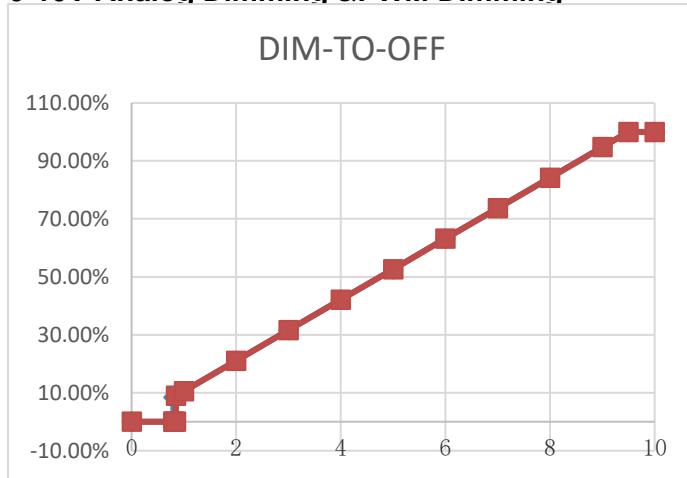


GND	Grey
Dimming wire 0-10V&PWM	Purple
12V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0-1mA
12V AUX Source Current	200mA
PWM Frequency Range	0.5-3KHZ
PWM high level	10V

NOTE:

1. I_o is actual output current and I_r is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com
 January 23, 2020


PWM Dimming

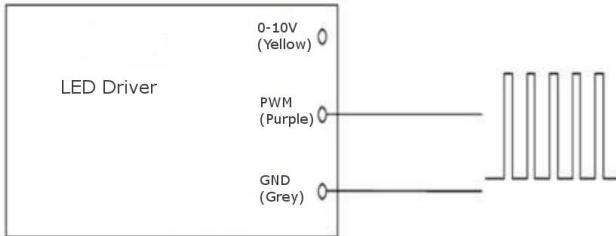


TIMER Dimming

NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of t_1 and t_2 can be set by the programmer.(0.5 step)
3. The value of I_1 and I_2 can be set by the programmer.
4. Changing the current from I_1 to I_2 may take a few min.

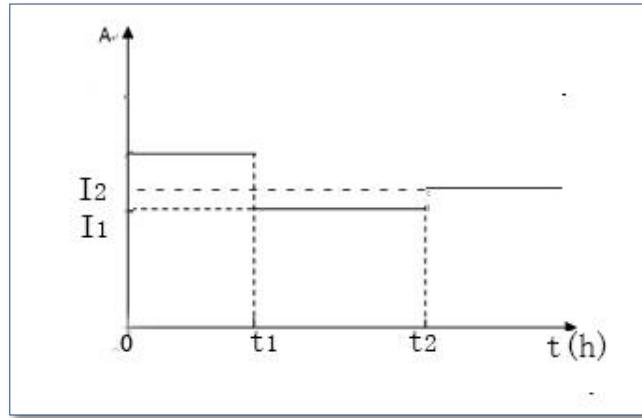


■ Mechanical Design

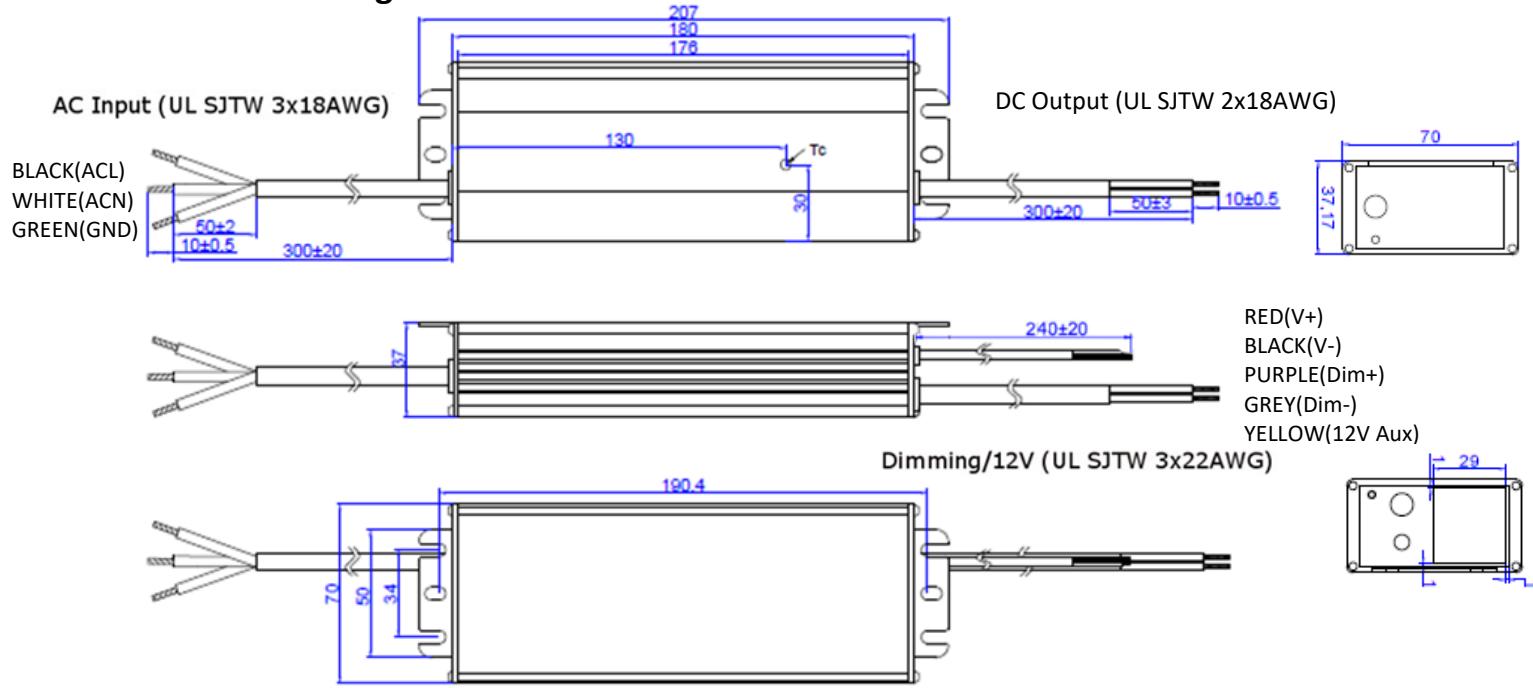

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com
 January 23, 2020


■ Mechanical Design J-Box

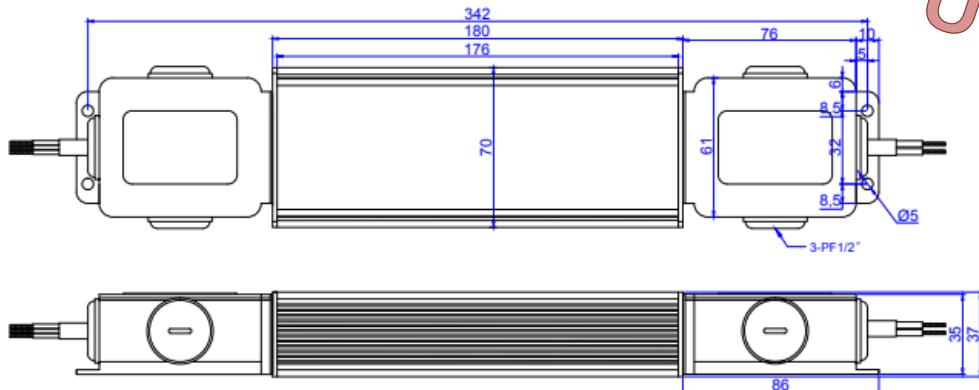


UL PENDING

Part Number Scheme

L2 W C P 096 S XXX S T-XYZ

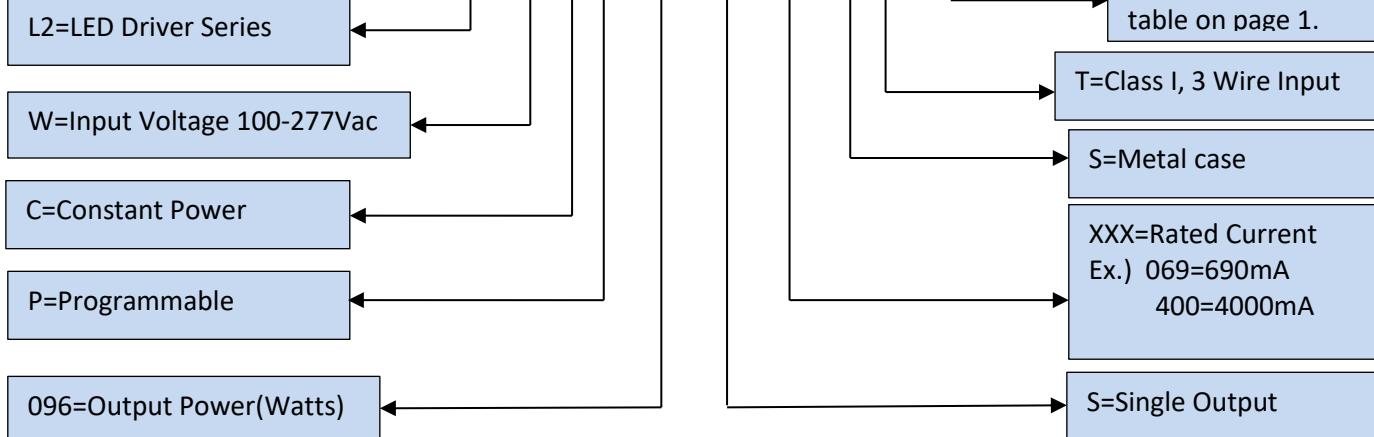

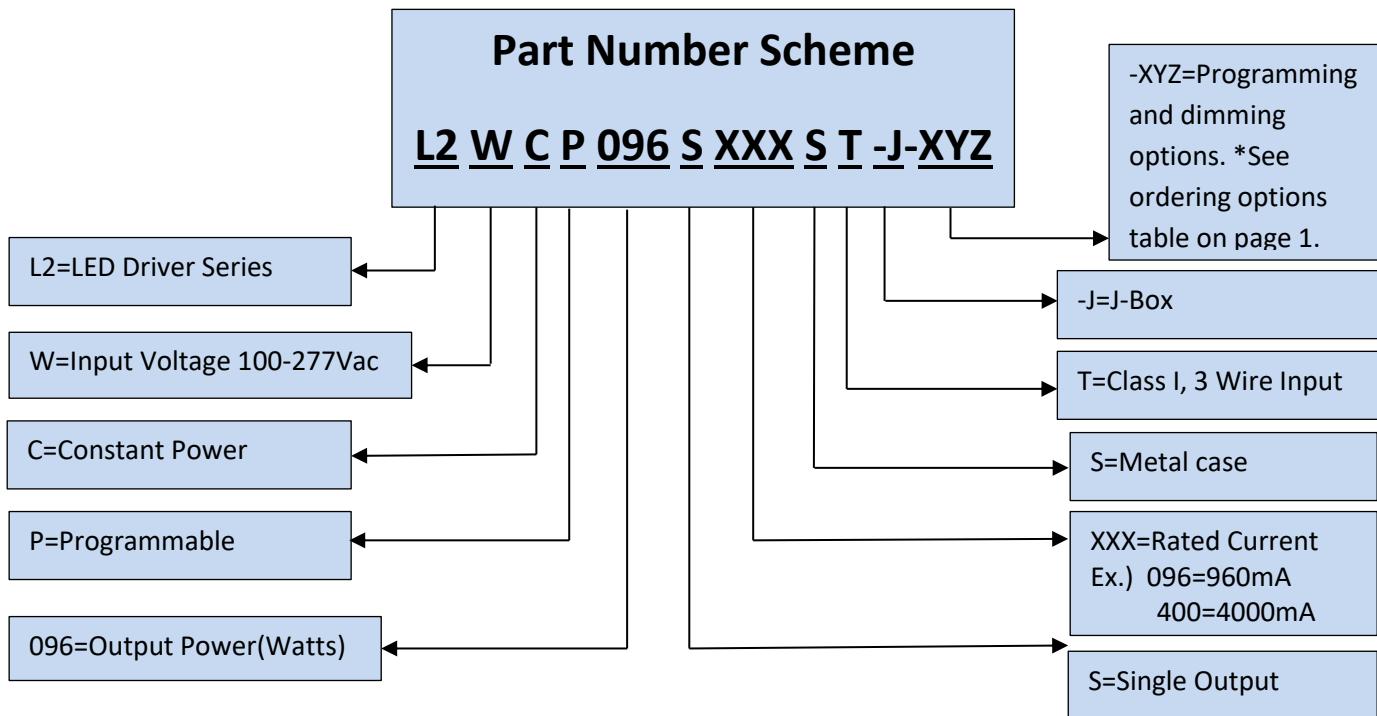

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**