

# Beads-on-Leads (2743004112)



Part Number: 2743004112

43 BEAD ON LEAD

#### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 2 = Taped and Reeled

# Ferrite suppression beads are supplied assembled on tinned copper wire for automated circuit board assembly.

- Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating. The resistance of the wire is 3.5 mOhm for the 22 AWG and 2.2 mOhm for the 20 AWG wire.

### Recommended Soldering Profile

#### <u>Packaging Options:</u>

- Beads-on-leads can be supplied bulk packed. The last digit of bulk packed parts is a "1". Parts with a "2" as the last digit of the part number are supplied taped and reeled per IEC 60286-1 and EIA RS-296-F standards. Taped and reeled parts are supplied 4500 pieces on a 14″ reel. Taping details: Component pitch 5 mm. Inside tape spacing 52.5 mm. Tape width 6 mm.
- Our "Bead-on-Lead Suppression Kit" (part number 0199000028) is available for prototype evaluation.


# For any bead-on lead requirement not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing
3D Model

Weight: 0.5 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 3.5  | ±0.25  | 0.138        | _          |
| В   | 62   | ±1.50  | 2.44         | _          |
| С   | 7.6  | ±0.30  | 0.299        | _          |
| D   | 0.65 | _      | 0            | 22 AWG     |

| Reel Inform         | Reel Information |   |                   |                   |  |  |  |
|---------------------|------------------|---|-------------------|-------------------|--|--|--|
| Tape<br>Width<br>mm |                  |   | Parts<br>13" Reel | Parts 14"<br>Reel |  |  |  |
| 6                   | 5                | _ | _                 | 4500              |  |  |  |



### **Chart Legend**

+ Test frequency


| Typical Impeda       | Impedance (Ω) |  |  |
|----------------------|---------------|--|--|
| 10 MHz               | 56            |  |  |
| 25 MHz <sup>+</sup>  | 86            |  |  |
| 100 MHz <sup>+</sup> | 126           |  |  |
| 250 MHz              | 139           |  |  |


Beads-on-leads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

# **Catalog Drawing**

The impedance of the 73 & 43 beads-on-leads are measure on the E4990A Impedance Analyzer. The 61 beads-on-leads are tested for impedance on the E4991A / HP4291B Impedance Analyzer.

| Typical Impend       | dance $(\Omega)$ |  |
|----------------------|------------------|--|
| 10 MHz               | 50               |  |
| 25 MHz <sup>+</sup>  | 75               |  |
| 100 MHz <sup>+</sup> | 110              |  |
| 250 MHz              | 115              |  |

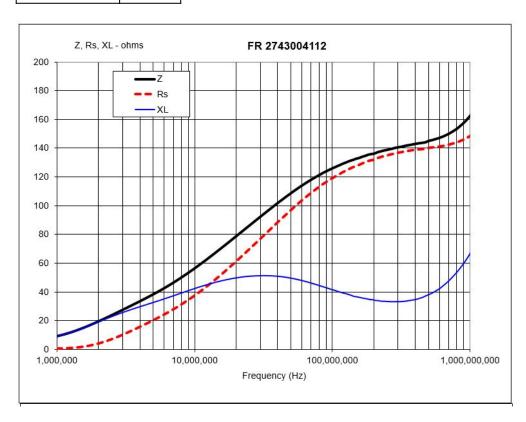

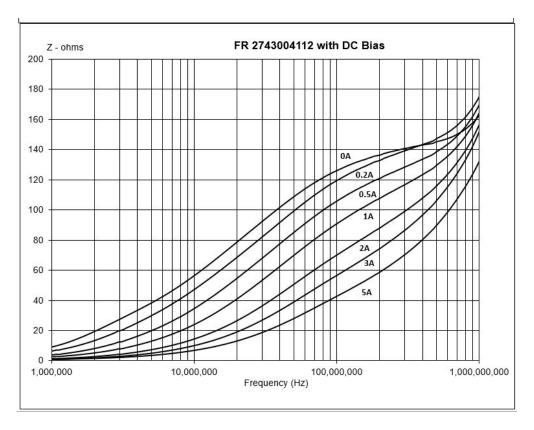

# **CSV** Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288 888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com