


## 2-1969584-8 Product Details

 Share  Print  Email

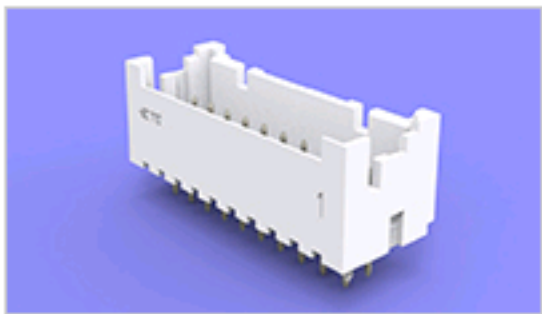

 Active

### Economy Power Connectors

ASSY,HDR,VERT,GWT,NO-BOSS,DUAL ROW,EP2.5

**2-1969584-8** 


TE Internal Number: 2-1969584-8

Product Highlights [View All](#)

- Economy Power 2.5 Product Line
- Connector
- Wire-to-Board
- Applies To Printed Circuit Board
- 28 Positions

Pricing & Availability 

Request Sample 

Add to My Part List 

Buy Product through  
Distributor 

Feedback

Documents


**Features**

Compliance

Please Note:

Use the Product Drawing for all design activity

#### Product Type Features

Product Line	Economy Power 2.5
Product Type 	Connector
Connector Type	Header
PCB Mounting Orientation	Vertical
PCB Mount Retention	With
PCB Mount Alignment	Without
Sealed	No

#### Mechanical Attachment

Mating Retention Type	Latch(ing)
-----------------------	------------

#### Electrical Characteristics

Contact - Rated Current (A)	7.5
Operating Voltage Reference	AC
Operating Voltage (VAC)	250

#### Termination Features

Termination Method to PC Board	Through Hole - Solder
--------------------------------	-----------------------

#### Dimensions

Tail Length (mm [in])	3.4 [0.134]
Length (X-Axis) (mm [in])	37.89 [1.492]
Width (Z-Axis) (mm [in])	10.16 [0.400]
Profile Height (Y-Axis) (mm [in])	9.80 [0.386]

#### Body Features

Selectively Loaded	No
Header Type	Shrouded
Mating Retention	With


#### Contact Features

Contact Type	Pin
Contact Plating, Termination Area, Material	Tin
Contact Plating, Mating Area, Material	Tin
Contact Base Material	Brass

#### Housing Features

Centerline (mm [in]) 	2.50 [0.098]
Connector Style	Plug
Housing Color	White
Housing Material	Nylon - GF

#### Configuration Features

Number of Positions 	28
Number of Rows	2

#### Industry Standards

RoHS/ELV Compliance 	RoHS compliant, ELV compliant
Lead Free Solder Processes 	Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
RoHS/ELV Compliance History	Always was RoHS compliant
UL Flammability Rating	UL 94V-0

#### Environmental

Operating Temperature (°C [°F])	-25 – +105 [-13 – +221]
---------------------------------	-------------------------

#### Conditions for Usage

Applies To	Printed Circuit Board
Glow Wire Rating	Glow Wire

#### Operation/Application

Application Use	Wire-to-Board
Contact Transmits (Typical Application)	Power

#### Packaging Features

Packaging Method	Box/Carton
------------------	------------

#### Other

Brand	TE Connectivity
-------	-----------------

#### Related Products

Not quite the product you're looking for?

[Find Similar Products](#)

[View Part in Product Feature Selector](#)

[Check for Tooling](#)

#### Corporate Information

[About TE](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[Global Accessibility Statement](#)

#### Quick Links

[Distributor Inventory](#)  
[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

#### Customer Support

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

#### Keep Me Informed

