


FEATURES

- 0603, 0805, 0806 AND 1008 CASE SIZES
- HIGH DC CURRENT AND LOW DC RESISTANCE
- NEW "S" VERSION FOR INCREASED SATURATION CURRENT
- UPGRADED "H" VERSION FOR HIGHEST CURRENT
- REFLOW SOLDERING APPLICABLE
- PACKAGE FOR AUTOMATIC PICK-PLACE

RoHS Compliant

Includes all homogeneous materials




SPECIFICATIONS

Specifications	Case Size			
	0603	0805	0806	1008
Inductance Range	0.47 μ H ~ 2.2 μ H	0.22 μ H ~ 10 μ H	0.47 μ H ~ 10 μ H	0.47 μ H ~ 10 μ H
Inductance Tolerance	$\pm 20\%$ (M), $\pm 30\%$ (N)			
Operating Temperature Range	-40°C ~ +85°C			
Self Resonant Frequency, DC Resistance, Rated DC Current and Inductance Tolerance	See Standard Values and Specifications Table			

Note: Extended values, tolerances, and enhanced versions are available please contact NIC for more details.

DIMENSIONS (mm)


Case Size	L	W	H	P
0603	1.6 $\pm$ 0.15	0.8 $\pm$ 0.15	0.5 $\pm$ 0.1	0.3 $\pm$ 0.2
			0.8 $\pm$ 0.15	
0805	2.0 +0.3/-0.1	1.25 $\pm$ 0.2	0.5 $\pm$ 0.1	0.5 $\pm$ 0.3
			0.9 $\pm$ 0.1	
			1.25 $\pm$ 0.2	
0806	2.0 +0.3/-0.1	1.6 $\pm$ 0.2	0.9 $\pm$ 0.1	0.5 $\pm$ 0.3
			1.1 $\pm$ 0.1	
1008	2.5 $\pm$ 0.2	2.0 +0.3/-0.1	0.9 $\pm$ 0.1	0.5 $\pm$ 0.3
			1.1 $\pm$ 0.1	

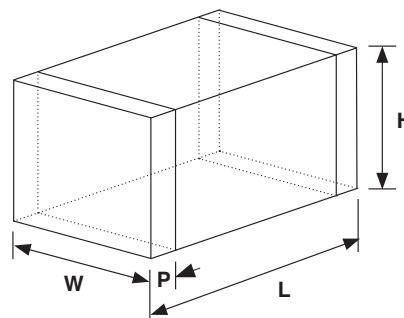

PART NUMBER SYSTEM

NFPS0806 M 1R0 TR 160 E
 — Series* (Recommended "S" for Upgraded Saturation Current)
 (Optional "H" for Highest Current Option)
 — Case Size: 06 = 0603, 10 = 0805
 — Inductance Tolerance Code:
 M = $\pm 20\%$, N = $\pm 30\%$
 — Rated inductance in μ H (R denotes decimal point)
 — Packaging: TR = Tape & Reel
 — Current rating code (120=1200mA)
 — RoHS compliant

*NFP vs. NFPS vs. NFPH Performance Comparison

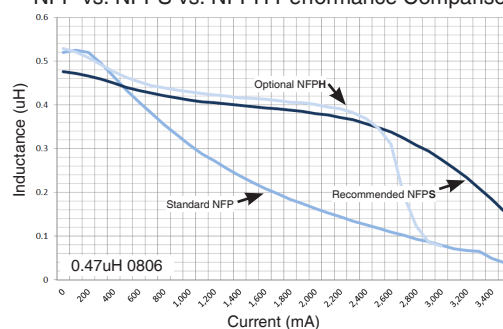

NFP0603 SERIES

0603 CASE SIZE

NIC Partnumber	Inductance (μH)	Tolerance	Test Frequency	SRF MHz (min.)	DC Resistance (Ω)	I _{rms} (mA)	I _{sat} (mA)	Component Thickness (mm)
NFP0603NR47TR90F	0.47	±30% (N)	1MHz	105	0.19 ± 25%	900	-	0.5 ± 0.1
NFPS0603_R22TR125F	0.22	±20% (M), ±30% (N)		200	0.10 ± 25%	1250	1600	0.8 ± 0.15
NFPS0603_R33TR120F	0.33	±20% (M), ±30% (N)		190	0.13 ± 25%	1200	1500	
NFP0603NR47TR120F	0.47	±30% (N)		105	0.12 ± 25%	1200	-	
NFPS0603_R47TR110F	0.47	±20% (M), ±30% (N)		180	0.15 ± 25%	1100	1200	
NFP0603NR68TR100F	0.68	±30% (N)		90	0.16 ± 25%	1000	-	
NFPS0603_R68TR115F	0.68	±20% (M), ±30% (N)		160	0.18 ± 25%	1150	1100	
NFP0603N1R0TR95F	1.0	±30% (N)		60	0.20 ± 25%	950	-	
NFPS0603_1R0TR100F	1.0	±20% (M), ±30% (N)		125	0.20 ± 25%	1000	800	
NFPS0603_1R5TR90F	1.5	±20% (M), ±30% (N)		100	0.23 ± 25%	900	500	
NFP0603N2R2TR75F	2.2	±30% (N)		40	0.30 ± 25%	750	-	
NFPS0603_2R2TR85F	2.2	±20% (M), ±30% (N)		80	0.30 ± 25%	850	300	

Maximum +40°C temperature rise at I_{rms}. Maximum -30% inductance drop from initial measured value at I_{sat}.

NFP0805 SERIES

0805 CASE SIZE

NIC Partnumber	Inductance (μH)	Tolerance	Test Frequency	SRF MHz (min.)	DC Resistance (Ω)	I _{rms} (mA)	I _{sat} (mA)	Component Thickness (mm)
NFP0805MR22TR150F	0.22	±20% (M)	1MHz	100	0.09 ± 25%	1500	-	0.5 ± 0.1
NFP0805_R47TR110F	0.47	±20% (M), ±30% (N)		100	0.12 ± 25%	1100	-	
NFPS0805_R47TR110F	0.47	±20% (M), ±30% (N)		80			1300	
NFP0805_1R0TR80F	1.0	±20% (M), ±30% (N)		60	0.19 ± 25%	800	-	
NFPS0805_1R0TR80F	1.0	±20% (M), ±30% (N)		40			700	
NFP0805_1R5TR70F	1.5	±20% (M), ±30% (N)		50	0.26 ± 25%	700	-	
NFPS0805_1R5TR70F	1.5	±20% (M), ±30% (N)		35			500	
NFP0805_2R2TR60F	2.2	±20% (M), ±30% (N)		40	0.34 ± 25%	600	-	0.9 ± 0.1
NFPS0805_2R2TR60F	2.2	±20% (M), ±30% (N)		30	0.32 ± 25%		350	
NFP0805_R47TR120F	0.47	±20% (M), ±30% (N)		100	0.09 ± 25%	1200	-	
NFPS0805_R47TR150F		±20% (M), ±30% (N)		100	0.08 ± 25%	1500	1200	
NFP0805_1R0TR100F	1.0	±20% (M), ±30% (N)		60	0.11 ± 25%	1000	-	
NFPS0805_1R0TR130F		±20% (M), ±30% (N)		60	0.11 ± 25%	1300	1150	
NFP0805_1R5TR90F	1.5	±20% (M), ±30% (N)		50	0.16 ± 25%	900	-	
NFPS0805_1R5TR110F		±20% (M), ±30% (N)		50	0.16 ± 25%	1100	800	
NFP0805_2R2TR80F	2.2	±20% (M), ±30% (N)		40	0.25 ± 25%	800	-	
NFPS0805_2R2TR90F		±20% (M), ±30% (N)		40	0.20 ± 25%	900	500	
NFP0805_3R3TR90F	3.3	±20% (M), ±30% (N)		30	0.19 ± 25%	900	-	
NFPS0805_3R3TR90F		±20% (M), ±30% (N)		30	0.20 ± 25%	900	350	
NFP0805_4R7TR80F	4.7	±20% (M), ±30% (N)		30	0.25 ± 25%	800	-	
NFPS0805_4R7TR80F		±20% (M), ±30% (N)		30	0.25 ± 25%	800	280	
NFP0805M100TR50F	10	±20% (M)		15	0.5 ± 30%	500	-	1.25 ± 0.2

Maximum +40°C temperature rise at I_{rms}. Maximum -30% inductance drop from initial measured value at I_{sat}.



Note: Extended values, tolerances, and enhanced versions are available please contact NIC for more details.

NIC COMPONENTS CORP. www.niccomp.com | www.lowESR.com | www.RFpassives.com | www.SMTmagnetics.com

Specifications are subject to change

NFP0806 SERIES

0806 CASE SIZE

NIC Partnumber	Inductance (μH)	Tolerance	Test Frequency	SRF MHz (min.)	DC Resistance (Ω)	I _{rms} (mA)	I _{sat} (mA)	Component Thickness (mm)
NFP0806_R47TR160F	0.47	±20% (M), ±30% (N)	1MHz	100	0.06 ± 25%	1600	-	0.9 ± 0.1
NFPS0806MR47TR150F		20%			0.08 ± 25%	1500	1600	
NFPH0806MR47TR230F		±20% (M), ±30% (N)		90	0.04 ± 25%	2300	2500	
NFPH0806MR68TR180F	0.68	±20% (M), ±30% (N)			0.06 ± 25%	1800	2000	
NFP0806_1R0TR140F	1.0	±20% (M), ±30% (N)		70	0.09 ± 25%	1400	-	
NFPS0806M1R0TR140F		20%					1200	
NFPH0806M1R0TR150F		±20% (M), ±30% (N)		60	0.07 ± 25%	1500	1800	
NFP0806_1R5TR120F	1.5	±20% (M), ±30% (N)		60	0.11 ± 25%	1200	-	
NFPS0806M1R5TR120F		20%					700	
NFP0806_2R2TR120F	2.2	±20% (M), ±30% (N)		50	0.11 ± 25%	1200	-	
NFPS0806M2R2TR120F		20%					500	
NFP0806_3R3TR120F	3.3	±20% (M), ±30% (N)		40	0.12 ± 25%	1200	-	
NFPS0806M3R3TR120F		20%					330	
NFP0806_4R7TR110F	4.7	±20% (M), ±30% (N)		30	0.14 ± 25%	1100	-	
NFPS0806M4R7TR110F		20%					220	
NFP0806M100TR80F	10	±20% (M)		15	0.25 ± 25%	800	-	1.1 ± 0.1

Maximum +40°C temperature rise at I_{rms}. Maximum -30% inductance drop from initial measured value at I_{sat}.

NFP1008 SERIES

1008 CASE SIZE

NIC Partnumber	Inductance (μH)	Tolerance	Test Frequency	SRF MHz (min.)	DC Resistance (Ω)	I _{rms} (mA)	I _{sat} (mA)	Component Thickness (mm)
NFP1008_R47TR180F	0.47	±20% (M), ±30% (N)	1MHz	100	0.04 ± 25%	1800	-	0.9 ± 0.1
NFPS1008_R47TR180F		±20% (M), ±30% (N)		105			1500	
NFP1008_1R0TR160F	1.0	±20% (M), ±30% (N)		60	0.06 ± 25%	1600	-	
NFPS1008_1R0TR160F		±20% (M), ±30% (N)		70			1400	
NFP1008_1R5TR150F	1.5	±20% (M), ±30% (N)		50	0.07 ± 25%	1500	-	
NFPS1008_1R5TR150F		±20% (M), ±30% (N)		65			1200	
NFP1008_2R2TR130F	2.2	±20% (M), ±30% (N)		40	0.08 ± 25%	1300	-	
NFPS1008_2R2TR130F		±20% (M), ±30% (N)		55			850	
NFP1008_3R3TR120F	3.3	±20% (M), ±30% (N)		30	0.10 ± 25%	1200	-	
NFPS1008_3R3TR120F		±20% (M), ±30% (N)					450	
NFP1008_4R7TR110F	4.7	±20% (M), ±30% (N)		25	0.11 ± 25%	1100	-	
NFPS1008_4R7TR110F		±20% (M), ±30% (N)					320	
NFP1008_1R0TR150F	1.0	±20% (M), ±30% (N)		70	0.09 ± 25%	1500	-	1.1 ± 0.1
NFP1008_2R2TR100F	2.2	±20% (M), ±30% (N)		40	0.12 ± 25%	1000	-	
NFP1008_3R3TR100F	3.3	±20% (M), ±30% (N)		30	0.12 ± 25%	1000	-	
NFP1008_4R7TR90F	4.7	±20% (M), ±30% (N)		25	0.14 ± 25%	900	-	
NFP1008M100TR80F	10	±20% (M)		15	0.30 ± 30%	800	-	

Maximum +40°C temperature rise at I_{rms}. Maximum -30% inductance drop from initial measured value at I_{sat}.




ENVIRONMENTAL CHARACTERISTICS


Test	Specification	Test Method & Condition
Resistance to Soldering Heat	No Mechanical Damage Inductance: $\pm 20\%$ of initial value (parts should be stabilized at room temperature for 2 hours prior to testing)	+260°C for 5 seconds
Low Frequency Vibration		Cycle 10Hz ~ 55Hz ~ 10Hz (1 minute), 2 hours each axis (X, Y, Z)
Thermal Shock		Cycle -40°C for 30 min. > +85°C 30 min., 100 cycles
Humidity		+60°C, 90% ~ 95%RH, 1,000 hours
Low Temperature Storage		-40°C for 1,000 hours
High Temperature Load Life		+85°C for 1,000 hours

LAND PATTERN DIMENSIONS


Series	A	B	C
NFP0603	0.6 ~ 0.8	0.6 ~ 0.8	0.6 ~ 0.8
NFP0805	0.8 ~ 1.2	0.9 ~ 1.6	0.8 ~ 1.2
NFP0806	0.8 ~ 1.2	1.2 ~ 2.0	0.8 ~ 1.2
NPF1008	0.6 ~ 1.0	1.8 ~ 2.2	1.0 ~ 1.4

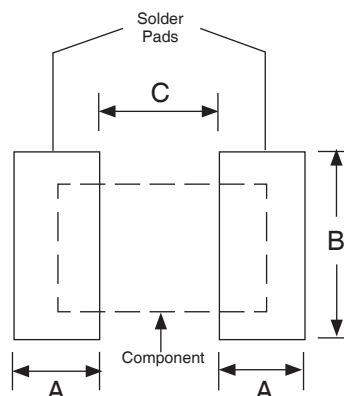

REFLOW SOLDERING PROFILE

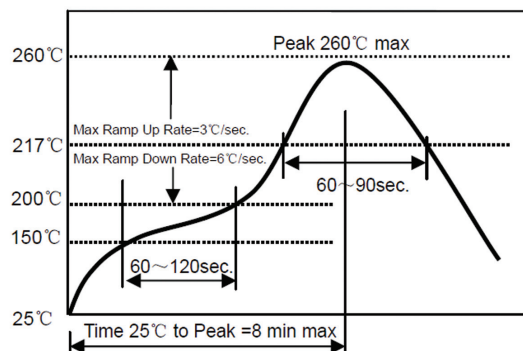


COMPOSITION

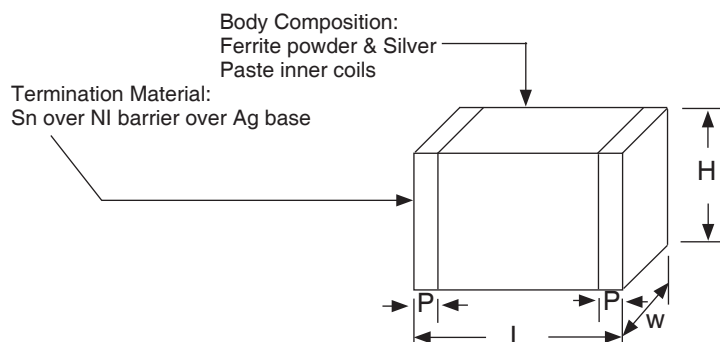


CARRIER DIMENSIONS & REEL QUANTITY (mm)

TYPE	Part Thickness	A	B	K max.	T max.	Carrier Material	Reel Qty
NFP0603	0.5	1.0 ± 0.2	1.8 ± 0.2	-	0.8	Paper	5,000
	0.8				1.1		4,000
NFP0805	0.5	1.55 ± 0.10	2.30 ± 0.10		0.8		Plastic
	0.9			1.45	0.3	3,000	
	1.25			1.75			
NFP0806	0.9	1.90 ± 0.10	1.45				
	1.1		1.75				
NFP1008	0.9	2.30 ± 0.10	2.80 ± 0.10	1.45			
	1.1			1.75			

PAPER CARRIER DIMENSIONS (mm)

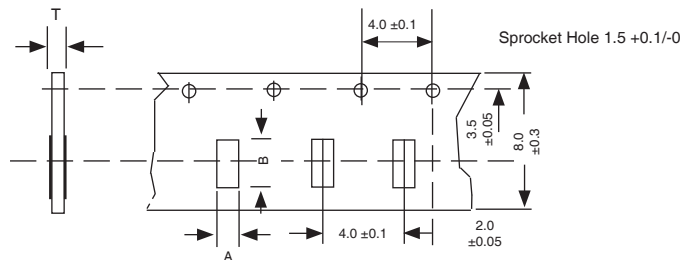

EMBOSSED PLASTIC CARRIER DIMENSIONS (mm)

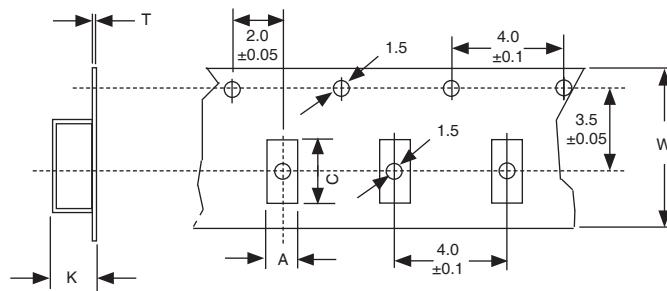

REEL DIMENSIONS (mm):

