Fair-Rite Products Corp.
Your Signal Solution®

Multi-Aperture cores (2843000302)

Part Number: 2843000302

43 MULTI-APERTURE CORE

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade
– Last digit 2 = Burnished

Multi-aperture cores are used in suppression applications and in balun (balance-unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.

All multi-aperture cores are supplied burnished.

Our “Multi-Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

For any multi-aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.

Weight: 2.6 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	13.3	±0.60	0.524	_
B	10.3	±0.30	0.406	_
C	7.5	±0.35	0.295	_
E	5.7	±0.25	0.224	_
H	3.8	±0.25	0.15	_

Chart Legend
+ Test frequency

Typical Impedance (Ω)	
25 MHz	110
100 MHz^{+}	161


Multi-aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A_L value. The high frequency 67 material is controlled for A_L

Downloaded from Arrow.com.

value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Multi-aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi-aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi-hole beads are tested for A_L value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

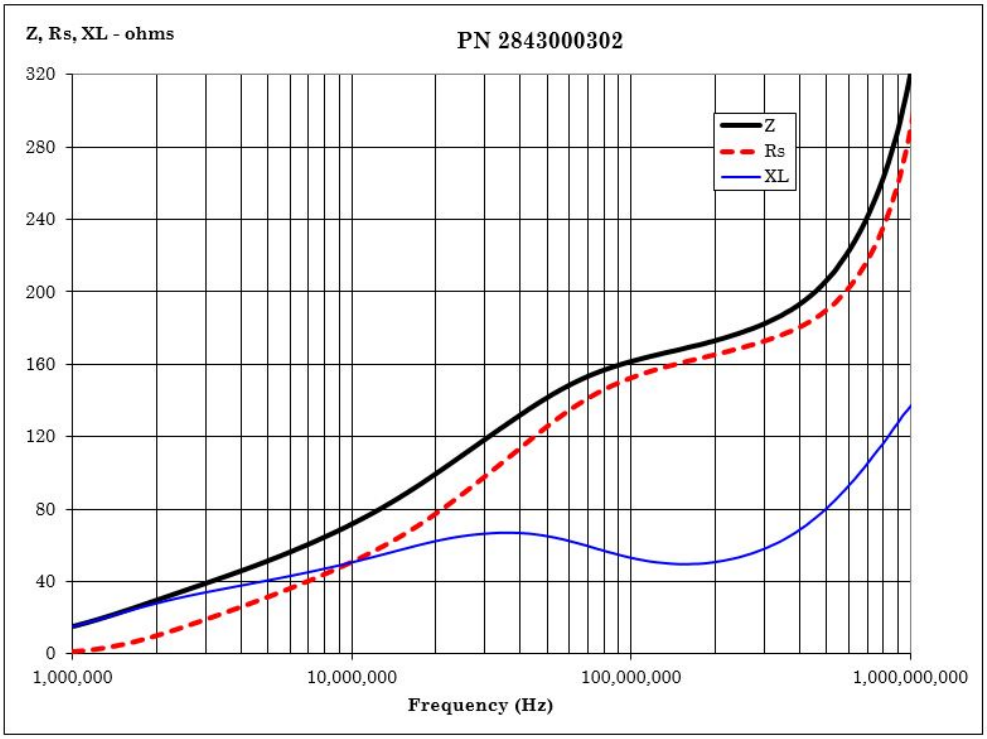

CSV Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com

Downloaded from Arrow.com.