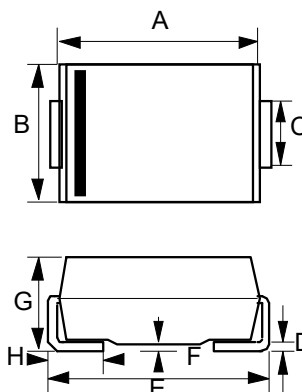


**SURFACE MOUNT
SCHOTTKY BARRIER RECTIFIERS**
REVERSE VOLTAGE – 50 to 60 Volts
FORWARD CURRENT – 5.0 Amperes
FEATURES

- For surface mounted applications
- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Very Low forward voltage drop
- High current capability
- Qualified according to AEC-Q101 Rec_C
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection application

MECHANICAL DATA

- Case: Molded plastic
- Case Material: Molding compound, UL Flammability classification 94V-0, "Halogen-free".
- Polarity: Color band denotes cathode
- Weight: 0.007 ounces, 0.21 grams

SMC


SMC		
DIM.	MIN.	MAX.
A	6.60	7.11
B	5.59	6.22
C	2.92	3.18
D	0.15	0.31
E	7.75	8.13
F	0.05	0.20
G	2.01	2.50
H	0.76	1.52
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

CHARACTERISTICS	SYMBOL	B550C	B560C	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	60	V
Maximum RMS Voltage	V _{RMS}	35	42	V
Maximum DC Blocking Voltage	V _{DC}	50	60	V
Maximum Average Forward Rectified Current (Note4) @TL=105°C	I _{AV}	5.0		A
Peak Forward Surge 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	125		A
Maximum Forward Voltage at 5.0A DC	V _F	0.7		V
Maximum DC Reverse Current @T _J =25°C at Rated DC Blocking Voltage @T _J =100°C	I _R	0.25 20		mA
Typical Junction Capacitance (Note 1)	C _j	240		pF
Typical Thermal Resistance (Note 2, 4)	R _{θJL}	15		°C/W
Typical Thermal Resistance (Note 3, 4)	R _{θJA}	50		°C/W
Operating Junction Temperature Range	T _J	-55 to +150		°C
Storage Temperature Range	T _{STG}	-55 to +150		°C

Note: (1) Measured at 1.0MHz and applied reverse voltage of 4.0V DC...

(2) Thermal Resistance Junction to Lead

(3) Thermal Resistance Junction to Ambient

(4) Unit mounted on glass epoxy substrate 1oz/ft² 30x30 mm copper pad.

REV-6, Sep-2019, KSHC09

Please be aware that an **Important Notice and Disclaimer** concerning availability, disclaimers, and use in critical applications of LSC products thereto appears at the end of this Data Sheet.

RATING AND CHARACTERISTIC CURVES B550C thru B560C

LITEON

FIG.1- FORWARD CURRENT DERATING CURVE

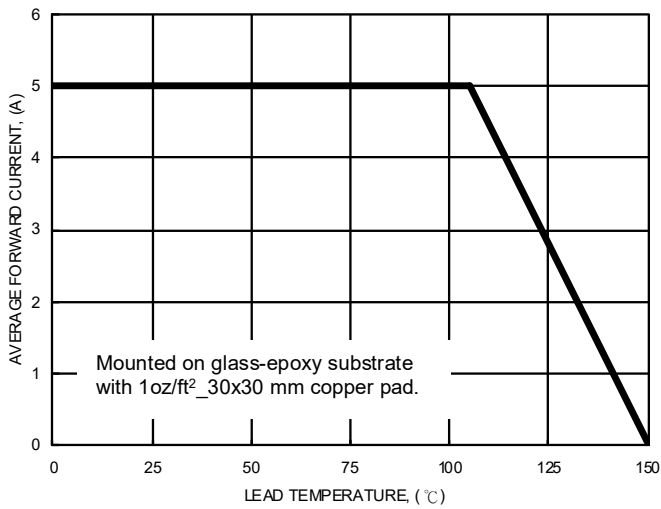


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

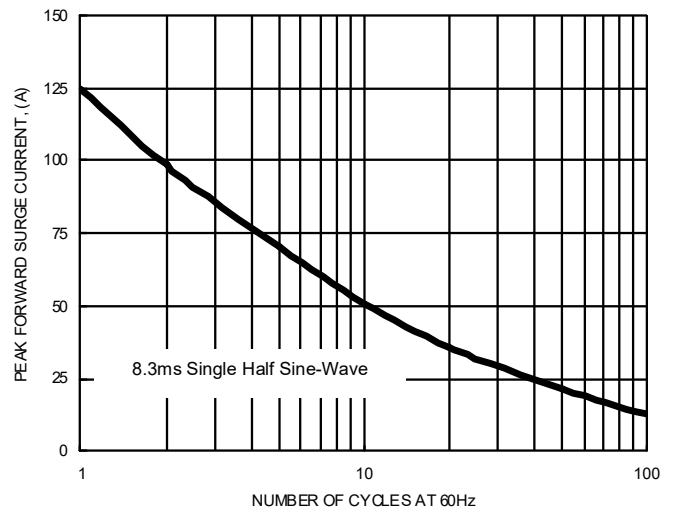


FIG.3- TYPICAL JUNCTION CAPACITANCE

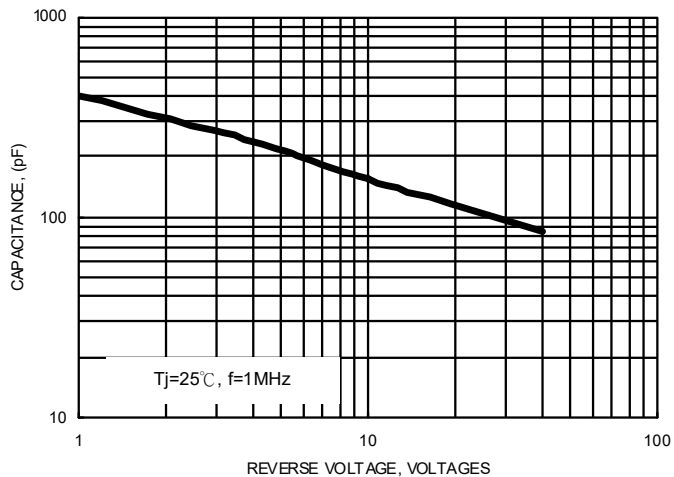


FIG.4- TYPICAL FORWARD CHARACTERISTICS

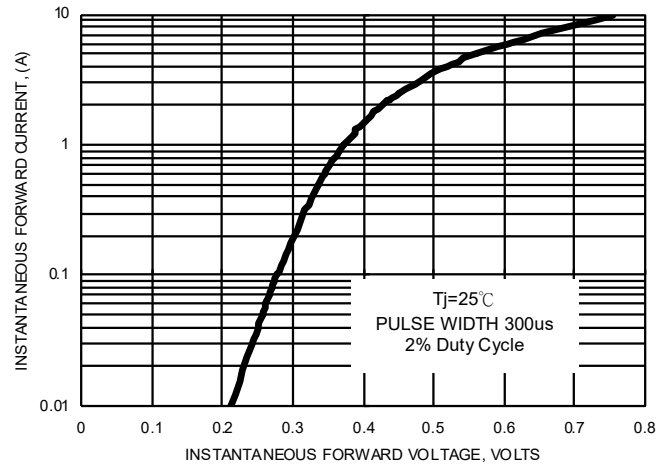


FIG.5- TYPICAL REVERSE CHARACTERISTICS


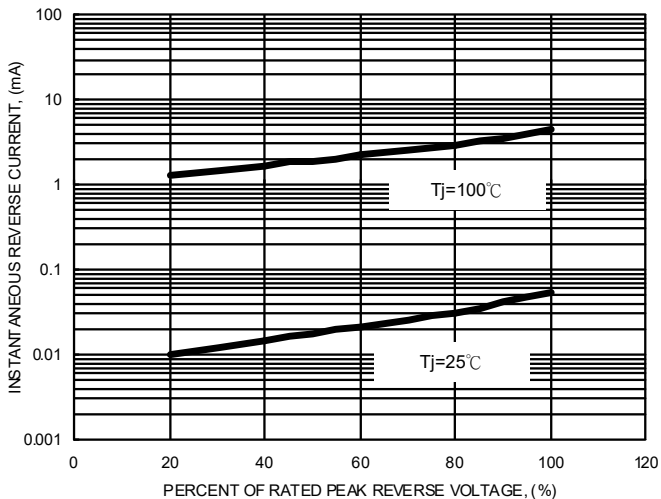


FIG.6- DC REVERSE VOLTAGE DERATING CURVE

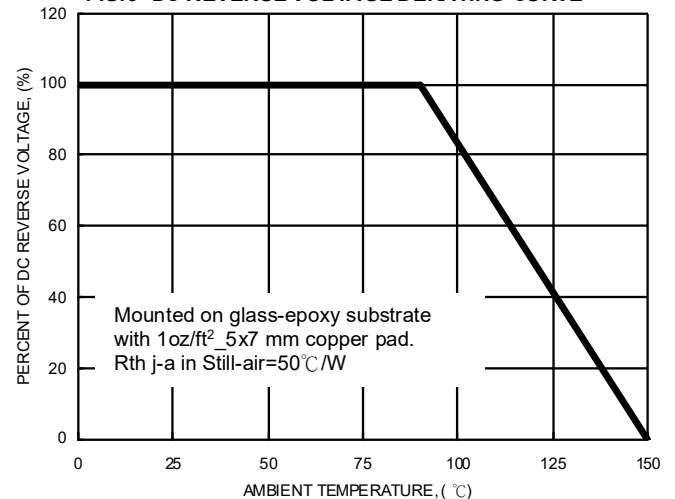

IMPORTANT NOTICE AND DISCLAIMER

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design purchase or use.

ALL INFORMATION ARE PROVIDED AS-IS, EVEN IT HAS QUALIFIED BY THE AEC-Q101 WHICH SATISFY INDUSTRIAL APPLICATION REQUIREMENT, EXCEPT AS EXPRESSLY STATED IN THIS DATA SHEET IS APPLIED FOR AUTOMOTIVE GRADE, LSC MAKE NO WARRANTIES, REPRESENTATION OR GUARANTEE, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, REGARDING ANY MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE LSC TECHNOLOGY.

LSC DOES NOT ASSUME ANY LIABILITY OR COMPENSATION FOR ANY APPLICATION ASSISTANCE OR CUSTOMER PRODUCT DESIGN, AND MAKE NO WARRANTY OR ACCEPT ANY LIABILITY WITH PRODUCTS, WHICH ARE PURCHASED OR USED FOR ANY UNINTENDED OR UNAUTHORIZED APPLICATION.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.