

# Axial Lead Rectifier

## MBR3100

This device employs the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

### Features

- Low Reverse Current
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- Highly Stable Oxide Passivated Junction
- Guard-ring for Stress Protection
- Low Forward Voltage
- 175°C Operating Junction Temperature
- High Surge Capacity
- Pb-Free Packages are Available\*

### Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 Gram (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Polarity: Cathode indicated by Polarity Band

### MAXIMUM RATINGS


| Rating                                                                                                                                           | Symbol                          | Max            | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------|------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                                                           | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 100            | V    |
| Average Rectified Forward Current $T_A = 100^\circ\text{C}$<br>( $R_{\theta JA} = 28^\circ\text{C/W}$ , Refer to P.C. Board Mounting,<br>Note 3) | $I_O$                           | 3.0            | A    |
| Non-Repetitive Peak Surge Current<br>(Surge Applied at Rated Load Conditions<br>Halfwave, Single Phase, 60 Hz)                                   | $I_{FSM}$                       | 150            | A    |
| Operating and Storage Junction Temperature<br>Range (Note 1) (Reverse Voltage Applied)                                                           | $T_J, T_{stg}$                  | -65 to<br>+175 | °C   |
| Voltage Rate of Change (Rated $V_R$ )                                                                                                            | $dv/dt$                         | 10             | V/ns |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .


\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## SCHOTTKY BARRIER RECTIFIER 3.0 AMPERES, 100 VOLTS



AXIAL LEAD  
CASE 267-05  
(DO-201AD)  
STYLE 1

### MARKING DIAGRAM



A = Assembly Location  
YY = Year  
WW = Work Week  
▪ = Pb-Free Package  
(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device     | Package                 | Shipping†        |
|------------|-------------------------|------------------|
| MBR3100    | Axial Lead              | 500 Units / Bag  |
| MBR3100G   | Axial Lead<br>(Pb-Free) | 500 Units / Bag  |
| MBR3100RL  | Axial Lead              | 1500/Tape & Reel |
| MBR3100RLG | Axial Lead<br>(Pb-Free) | 1500/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

**Preferred** devices are recommended choices for future use and best overall value.

# THERMAL CHARACTERISTICS

| Characteristic                                                          | Symbol          | Max | Unit                 |
|-------------------------------------------------------------------------|-----------------|-----|----------------------|
| Thermal Resistance, Junction-to-Ambient (see Note 3, Mounting Method 3) | $R_{\theta JA}$ | 28  | $^{\circ}\text{C/W}$ |

# ELECTRICAL CHARACTERISTICS ( $T_L = 25^{\circ}\text{C}$ unless otherwise noted)

| Characteristic                                                                                                                                                    | Symbol | Max          | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------------|------|
| Maximum Instantaneous Forward Voltage (Note 2)<br>( $i_F = 3.0\text{ A}$ , $T_L = 25^{\circ}\text{C}$ )<br>( $i_F = 3.0\text{ A}$ , $T_L = 100^{\circ}\text{C}$ ) | $V_F$  | 0.79<br>0.69 | V    |
| Maximum Instantaneous Reverse Current @ Rated dc Voltage (Note 2)<br>$T_L = 25^{\circ}\text{C}$<br>$T_L = 100^{\circ}\text{C}$                                    | $i_R$  | 0.6<br>20    | mA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle = 2.0%.

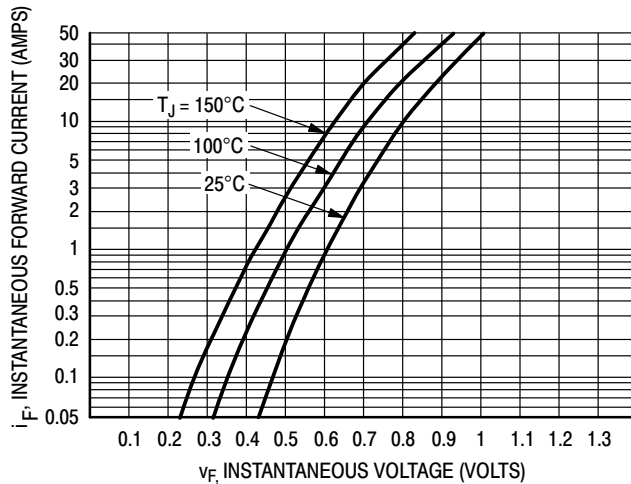


Figure 1. Typical Forward Voltage

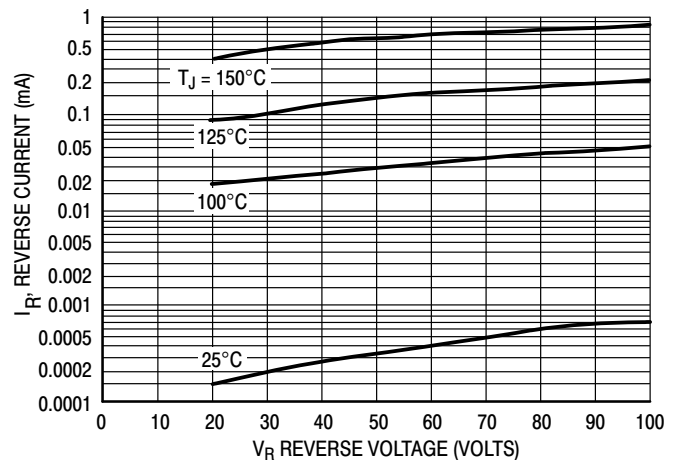


Figure 2. Typical Reverse Current\*

\*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if  $V_R$  is sufficient below rated  $V_R$ .

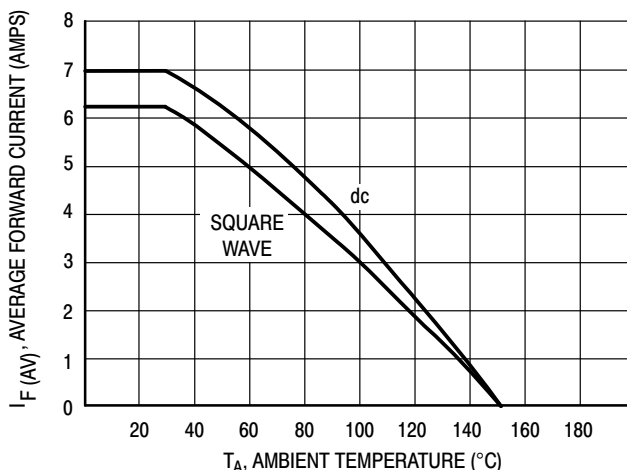


Figure 3. Current Derating  
(Mounting Method #3 per Note 3)

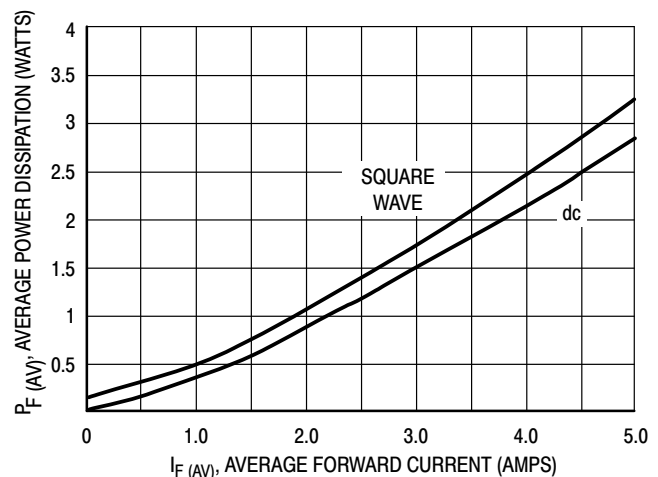
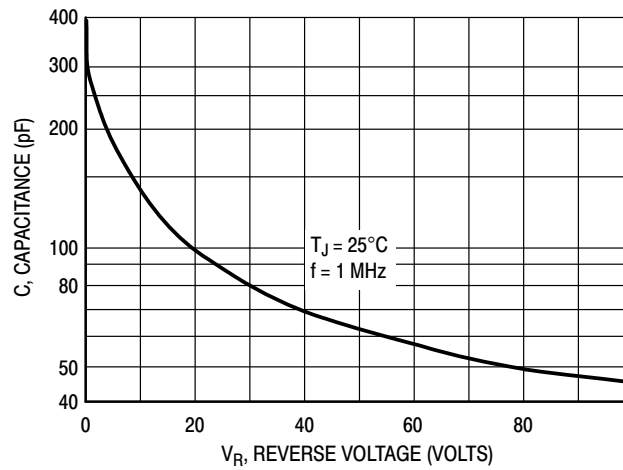


Figure 4. Power Dissipation

# MBR3100



**Figure 5. Typical Capacitance**

## NOTE 3 – MOUNTING DATA


Data shown for thermal resistance junction-to-ambient ( $R_{\theta JA}$ ) for the mountings shown is to be used as typical guideline values for preliminary engineering, or in case the tie point temperature cannot be measured.

### TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

| Mounting Method | Lead Length, L (in) |     |     |     | $R_{\theta JA}$      |
|-----------------|---------------------|-----|-----|-----|----------------------|
|                 | 1/8                 | 1/4 | 1/2 | 3/4 |                      |
| 1               | 50                  | 51  | 53  | 55  | $^{\circ}\text{C/W}$ |
| 2               | 58                  | 59  | 61  | 63  | $^{\circ}\text{C/W}$ |
| 3               | 28                  |     |     |     | $^{\circ}\text{C/W}$ |


### Mounting Method 1

P.C. Board where available copper surface is small.

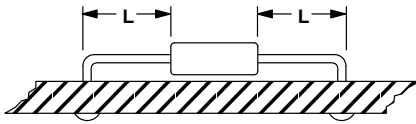


### Mounting Method 2

Vector Push-In  
Terminals T-28





### Mounting Method 3

P.C. Board with  
2-1/2" X 2-1/2"  
copper surface.

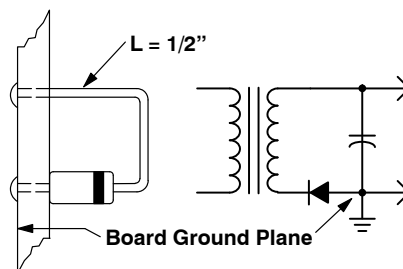

AXIAL LEAD  
CASE 267-05  
ISSUE G

DATE 06 JUN 2000

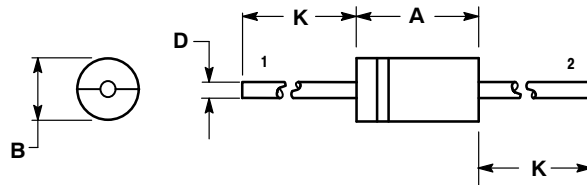

NOTES:

1. DIMENSIONS AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 267-04 OBSOLETE, NEW STANDARD 267-05.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.287  | 0.374 | 7.30        | 9.50 |
| B   | 0.189  | 0.209 | 4.80        | 5.30 |
| D   | 0.047  | 0.051 | 1.20        | 1.30 |
| K   | 1.000  | ---   | 25.40       | ---  |

STYLE 1:  
PIN 1: CATHODE (POLARITY BAND)  
2: ANODE

STYLE 2:  
NO POLARITY

|                  |             |                                                                                                                                                                                     |
|------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB42170B | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | AXIAL LEAD  | PAGE 1 OF 1                                                                                                                                                                         |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

