

DATA SHEET

OLS400: Hermetic Surface-Mount Low-Input Current Optocoupler

Features

- Electrical parameters guaranteed over -55°C to $+125^{\circ}\text{C}$ ambient temperature range
- 1500 V_{DC} electrical isolation
- Low input current: 0.5 mA
- Low output V_{SAT}: 0.1 V typical
- High current transfer ratio (CTR): 1000% typical
- Low power consumption
- Similar to industry standard parts: 6N138/6N139 in plastic and 6N140 in hermetic dual in line packages (DIPs)
- Offers 100% high reliability screenings

Description

The OLS400 has a high CTR at low input currents, making it ideal for applications such as Metal Oxide Semiconductors (MOS), Complementary MOSs (CMOS), and low-power logic interfacing or RS-232C data transmission systems. Each OLS400 has an LED and integrated photodiode Darlington detector I/C, mounted and coupled in a custom hermetic surface-mount Leadless Chip Carrier (LCC) package that provides 1500 V_{DC} electrical isolation between the input and output.

The Darlington detector has an integrated base-to-emitter resistor for superior high-temperature performance. The split Darlington design permits lower output saturation voltage and higher switching speed operation than is possible with conventional photo-Darlington designs.

Device mounting is achieved with reflow soldering or conductive epoxies. The pads are gold plated and RoHS compliant.

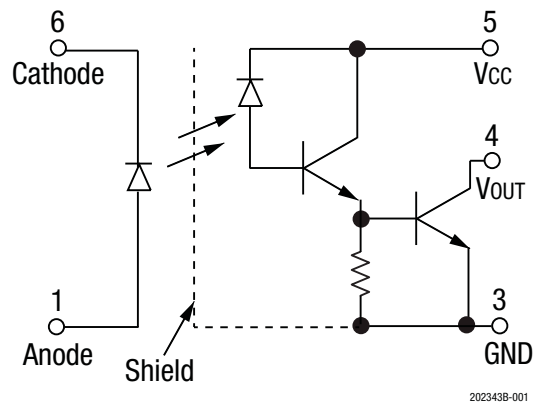


Figure 1. OLS400 Block Diagram

Figure 1 shows the OLS400 functional block diagram. Table 1 provides the OLS400 absolute maximum ratings. Table 2 provides the OLS400 electrical specifications.

Figures 2 through 5 illustrate the OLS400 typical performance characteristics. Figure 6 shows the OLS400 switching test circuit. Figure 7 provides the OLS400 package dimensions.

Table 1. OLS400 Absolute Maximum Ratings¹

Parameter	Symbol	Minimum	Maximum	Units
<i>Coupled</i>				
Input to output isolation voltage	V _{OC}	–1500	+1500	V
Storage temperature	T _{STG}	–65	+150	°C
Operating temperature	T _A	–55	+125	°C
Mounting temperature range (3 minutes maximum)			+240	°C
<i>Input Diode</i>				
Average input current	I _{DD}		20	mA
Peak forward current (≤ 1 ms duration)	I _F		40	mA
Reverse voltage	V _R		5	V
Power dissipation	P _O		36	mW
<i>Output Detector</i>				
Average output current			+40	mA
Supply voltage	V _{CC}	–0.5	+20.0	V
Output voltage	V _{OUT}	–0.5	+20.0	V
Power dissipation	P _O		+50	mW

¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to the device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

² Measured between pins 1, 2, and 6 shorted together, and pins 3, 4, and 5 shorted together. T_A = 25°C and duration = 1 s.

CAUTION: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

Table 2. OLS400 Electrical Specifications (Note 1)
(T_A = 25 °C, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Minimum	Typical	Maximum	Units
Current transfer ratio ²	CTR	I _F = 0.5 mA, V _O = 0.4 V, V _{CC} = 4.5 V I _F = 1.6 mA, V _O = 0.4 V, V _{CC} = 4.5 V I _F = 5.0 mA, V _O = 0.4 V, V _{CC} = 4.5 V	300 300 200			% % %
Logic:						
Low output voltage	V _{OL}	I _F = 0.5 mA, I _{OL} = 1.5 mA, V _{CC} = 4.5 V I _F = 5.0 mA, I _{OL} = 10.0 mA, V _{CC} = 4.5 V		0.1 0.2	0.4 0.4	V V
High output current	I _{OH}	I _F = 0 mA, V _O = V _{CC} = 18.0 V		0.005	250.00	μA
Low supply current	I _{CC}	I _F = 1.6 mA, V _{CC} = 18 V		0.6	2.0	mA
High supply current	I _{CC} H	I _F = 0 mA, V _{CC} = 18.0 V		0.01	40.0	μA
Input:						
Input forward voltage	V _F	I _F = 1.6 mA		1.65	2.0	V
Reverse breakdown voltage	B _{VR}	I _R = 10 μA	3			V
Output leakage current ³	I _{I-O}	R _H ≤ 50%, T _A = 25 °C, V _{I-O} = 1500.0 V _{DC}			1.0	μA
Propagation delay time:						
Logic high to low	t _{PHL}	I _F = 0.5 mA, R _L = 4.7 kΩ, V _{CC} = 5.0 V, T _A = 25 °C I _F = 5 mA, R _L = 680 Ω, V _{CC} = 5 V, T _A = 25 °C		26.0 2	100.0 10	μs μs
Logic low to high	t _{PLH}	I _F = 0.5 mA, R _L = 4.7 kΩ, V _{CC} = 5.0 V, T _A = 25 °C I _F = 5 mA, R _L = 680 Ω, V _{CC} = 5 V, T _A = 25 °C		28 10	60 30	μs μs

¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to the device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

² CTR is defined as the ratio of the output collector current I_C to the forward LED current I_F, multiplied by 100%.

³ Measured between pins 1, 2, and 6 shorted together, and pins 3, 4, and 5 shorted together. T_A = 25°C and duration = 1 s.

Typical Performance Characteristics

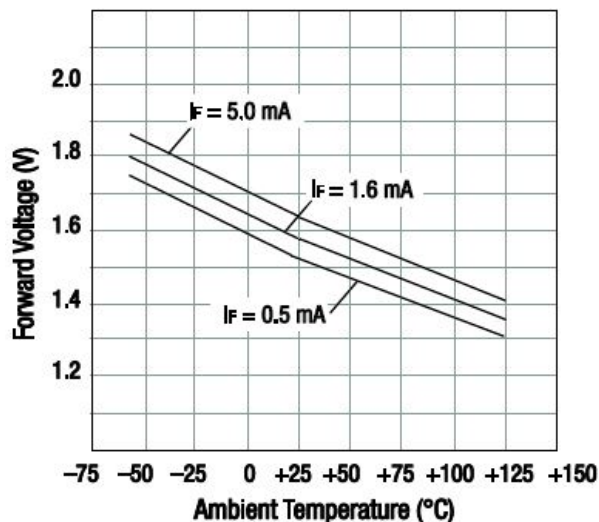


Figure 2. Forward Current vs Temperature

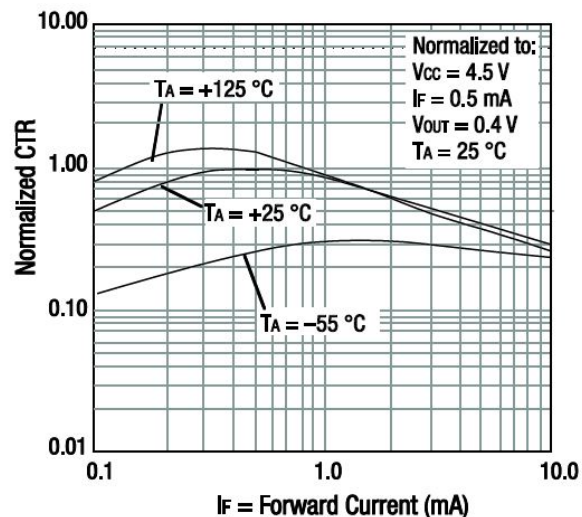


Figure 3. Normalized CTR vs Input Diode Forward Current

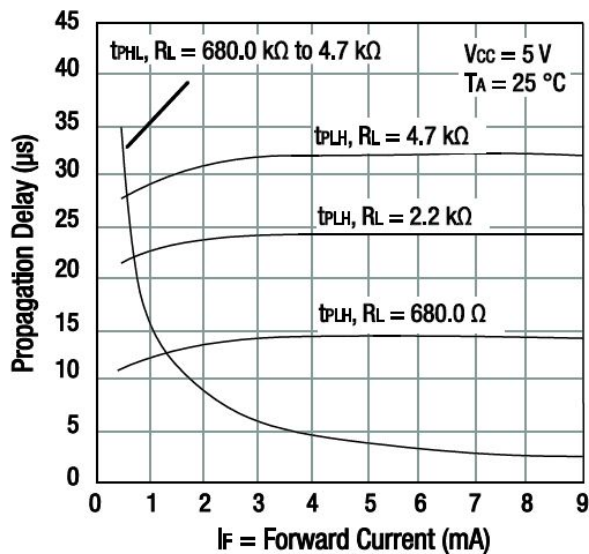


Figure 4. Propagation Delay vs Input Diode Forward Current

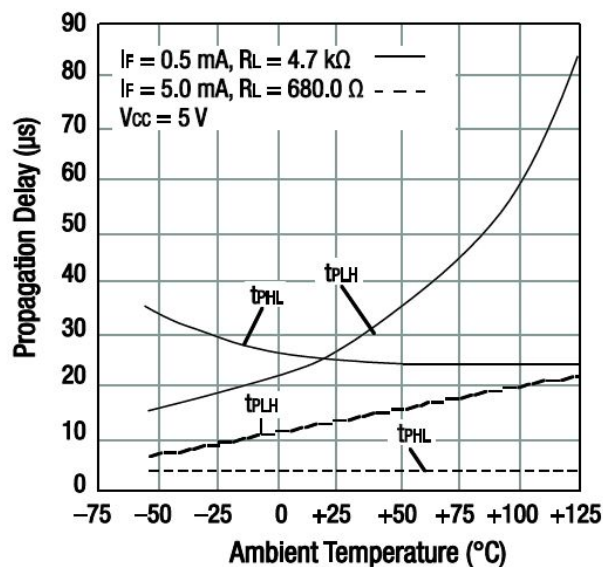


Figure 5. Propagation Delay vs Temperature

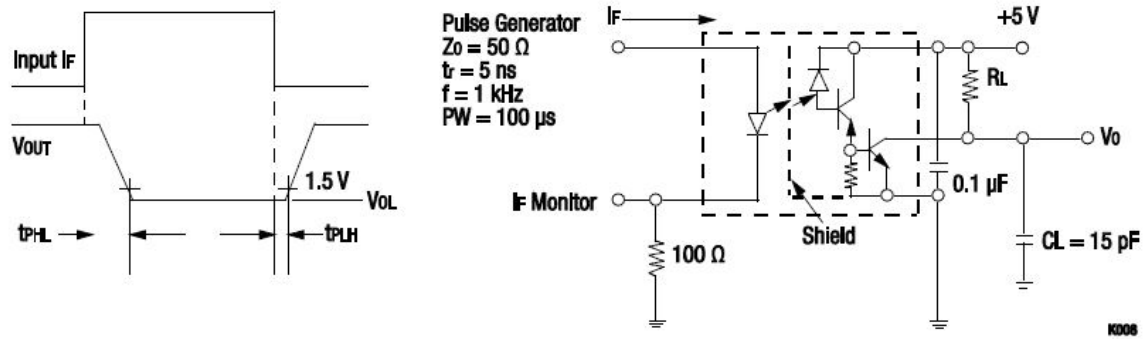


Figure 6. OLS400 Switching Test Circuit

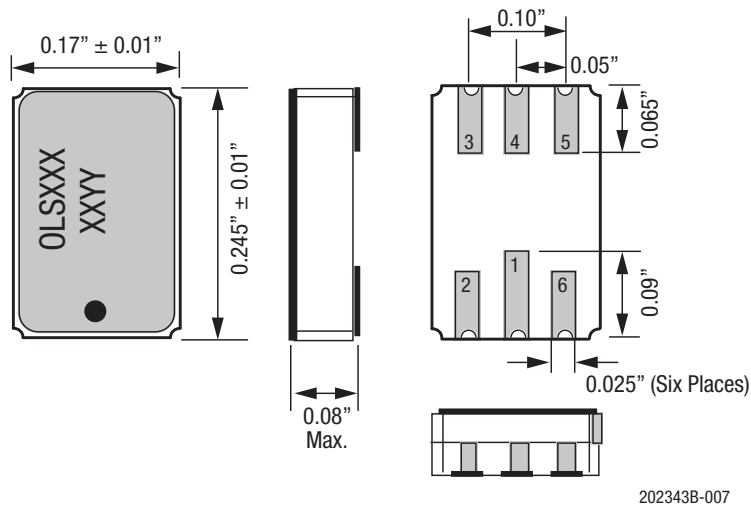


Figure 7. OLS400 Package Dimensions

Ordering Information

Model Name	Manufacturing Part Number
OLS400: High-Speed Hermetic, Low-Input Current Optocoupler	OLS400

Copyright © 2012, 2016-2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.