

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY CORPORATION. ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-15-012149	21AUG2015	DLD	MDB
	B	REVISED PER ECO-17-003503	14MAR2017	DLD	JLT




KEY CODE A
SCALE 4:1



KEY CODE B
SCALE 4:1




KEY CODE C
SCALE 4:1





KEY CODE D
SCALE 4:1

1. CAP ASSEMBLY IS SHIPPED WITH TPA IN PRE-STAGED POSITION. SEE INSTRUCTION SHEET 408-32094 FOR CONNECTOR SERVICE AND TPA OPERATION.
2. TERMINALS SOLD SEPARATELY. FOR USE WITH TE MCON 1.2mm CLEAN BODY TAB CONTACT WITH WIRE SEAL. SEE TABLE.
3. FOR OPTIONAL TERMINAL CAVITY BLOCKING, CONTACT TE SALES REPRESENTIVE OR CUSTOMER SERVICE.
4. CONTACT PLATING AND APPLICABLE INDIVIDUAL WIRE SEAL ARE APPLICATION DEPENDENT. CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR DETAILS.
5. FOR WIRE CRIMP DETAILS, SEE TE APPLICATION SPECIFICATION 114-18464.
6. DOCUMENTED I.C.D. IS SPECIFIED TO MEET MOST WIRE SEAL APPLICATIONS. HOWEVER, I.C.D. IS HIGHLY DEPENDENT ON INSULATION TYPE AND OD. SUFFICIENT GRIP OF THE WIRE SEAL MUST BE OBTAINED SUCH THAT WIRE SEAL DOES NOT DISPLACE FROM INSULATION GRIP DURING CONTACT INSERTION INTO CONNECTOR HOUSING. THE WIRE SEAL SHALL NOT BE CRIMPED TOO TIGHTLY THAT THE WIRE SEAL TEARS DURING THE CRIMPING OPERATION.
7. CAP ASSEMBLY ACCEPTS ACCESSORY CLIPS DESIGNED TO FUNCTION IN CLIP SLOT DEFINED BY EWCAP-005-7, REVISION A.
8. CONNECTOR VALIDATION PER USCAR-2 (REV 6) T4,V2,S3.
9. TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = 3 DIGIT JULIAN DAY, S = 1 DIGIT SHIFT).
10. NOTE REMOVED

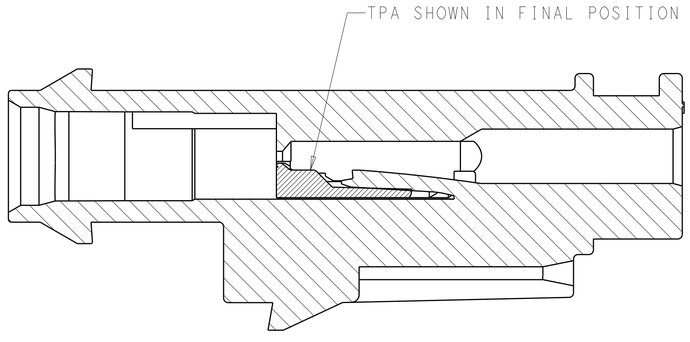


SECTION X-X

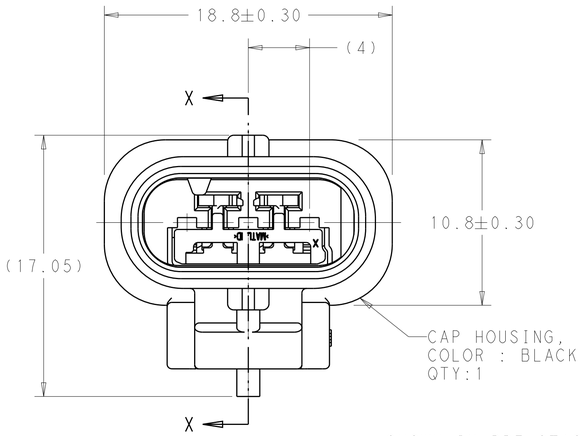


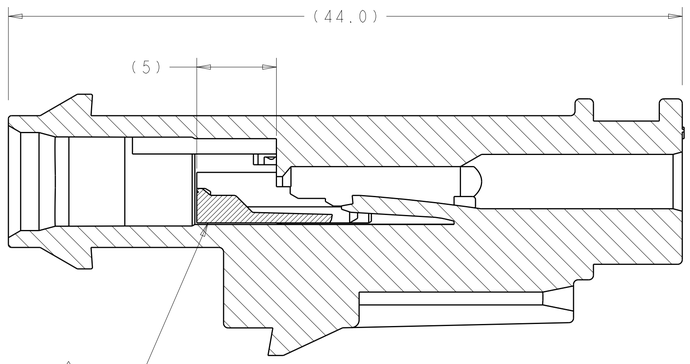


SECTION X-X

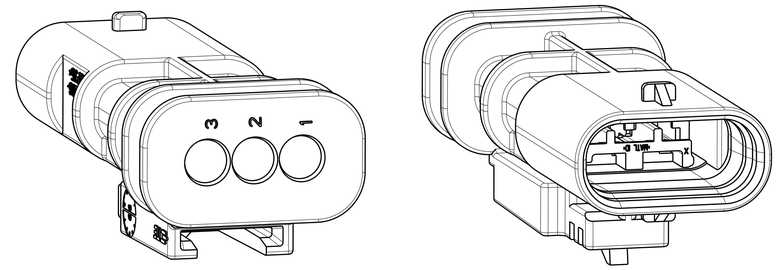

ISOMETRIC VIEWS
SCALE 4:1



WIRE CRIMP DIMENSIONS



INSULATION CRIMP DIMENSIONS

KEY CODE	PART NUMBER
D	2203772-4
C	2203772-3
B	2203772-2
A	2203772-1

150°C 4	2141114 2141116 2177610	5	5	6	4
MAX TEMP	MALE TERMINAL P/N	W.C.H	W.C.W	I.C.D	WIRE SEAL PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.15
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN VISHNU.P 13MAY2013
CHK MD BROWN 13MAY2013
APVD MD BROWN 13MAY2013
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME CAP ASSEMBLY, SEALED, 3 POSITION, MCON
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2203772	-

CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV B

4805 (3/13)

Downloaded from Arrow.com.