


# Single-phase EMC Filter for Control Equipment



- Filter for the control line of complex equipment and machinery
- To ensure interference-free operation of control equipment (PLC, Motion-, Robot Control etc.)
- To improve operational reliability and system stability
- Compact EMC filter design with minimum space requirement




### Performance indicators

Attenuation performance



Rated current [A]



### Approvals & Compliances



### Features and Benefits

- An additional filter for the supply cables of controls of rather large and complex systems, to ensure a reliable operation of the control unit.
- To achieve significant system stability improvement by reducing the risk of internal interference propagation and coupling.
- FN 2415 B version without leakage current (0 mA)
- FN 2415 L version with leakage current of less than 3.5 mA.
- Simple and time-saving installation with good accessibility for automatic and hand tools
- Solid, touch-safe terminal blocks offering sufficient contacting cross section according to the EN 60204-1 installation standard
- By providing a very decent attenuation performance, FN 2415 contributes significantly to the achievement of electromagnetic compliance, e.g. EN50370-1 standards for machine tools.

## Technical Specifications

<b>Maximum continuous operating voltage</b>	250 VAC
<b>Operating frequency</b>	DC to 400 Hz
<b>Rated currents</b>	6 to 16 A @ 50°C
<b>High potential test voltage</b>	P/N → E 2250VDC for 2 sec P → N 1100VDC for 2 sec
<b>Protection category</b>	IP 20
<b>Overload capability</b>	4x rated current at switch on, 1.5x rated current for 1 minute, once per hour
<b>Temperature range (operation and storage)</b>	-25°C to +100°C (25/100/21)
<b>Flammability corresponding to</b>	UL 94 V-2 or better
<b>Design corresponding to</b>	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
<b>MTBF @ 50°C/250 V (Mil-HB-217F)</b>	1,300,000 hours


## Typical Applications

Ideal for industrial equipment, machinery and diverse process automation systems, which involve any kind of control units (NC, CNC, Motion- and Robot Controls).







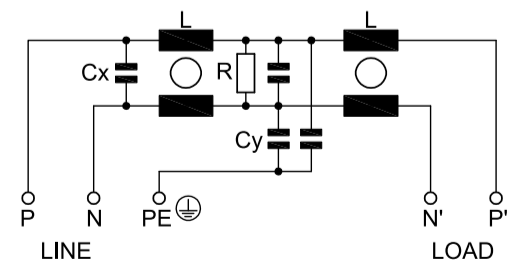



Large and complex machine tools with multiple driving axes and very long motor cables can be subjected to major reliability problems, provoked and by internal coupling of interferences from the drive system to the control wires.

This can cause drop outs and interrupts of the control unit and consequently lead to unnecessary downtimes of the entire machine. FN 2415 can also be used for most diverse single-phase applications, e.g. motor drives and power supplies.

### Typical electrical schematic



### Filter Selection Table

Filter	Buy	Rated current @40°C (25°C)	Leakage current* 250VAC/50Hz (120VAC/60Hz)	Power loss	Inductance**		Capacitance**		Resistance**	Input/Output	Weight
					L	Cx	Cy	R			
		[A]	[mA]	[W]	[mH]**	[μF]	[nF]	[kΩ]		[kg]	
<b>FN2415-6-29</b>		6 (6.6)	7.85 (4.52)	2.2	8	3.3	100	220	-29	0.4	
<b>FN2415-10-29</b>		10 (11)	7.85 (4.52)	2.4	4.2	3.3	100	220	-29	0.4	
<b>FN2415-16-29</b>		16 (17.5)	7.85 (4.52)	4.3	3	3.3	100	220	-29	0.4	
<b>FN2415B-6-29</b>		6 (6.6)	0.00 (0.00)	2.2	8	3.3		220	-29	0.4	
<b>FN2415B-10-29</b>		10 (11)	0.00 (0.00)	2.4	4.2	3.3		220	-29	0.4	
<b>FN2415B-16-29</b>		16 (17.5)	0.00 (0.00)	4.3	3	3.3		220	-29	0.4	
<b>FN2415L-6-29</b>		6 (6.6)	2.59 (1.49)	2.2	8	3.3	33	220	-29	0.4	
<b>FN2415L-10-29</b>		10 (11)	2.59 (1.49)	2.4	4.2	3.3	33	220	-29	0.4	
<b>FN2415L-16-29</b>		16 (17.5)	2.59 (1.49)	4.3	3	3.3	33	220	-29	0.4	

\* Maximum leakage under normal operating conditions (acc. to IEC60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

\*\* Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%

\*\*\* Value of both inductors in the same




### Typical Filter Attenuation

Per CISPR 17; DM (differential mode) =50 Ω/50 Ω sym; CM (common mode)=50 Ω/50 Ω asym

6 A: Standard type

L type




B type



10 A: Standard type

L type




B type




16 A: Standard type

L type

B type



### Mechanical Data

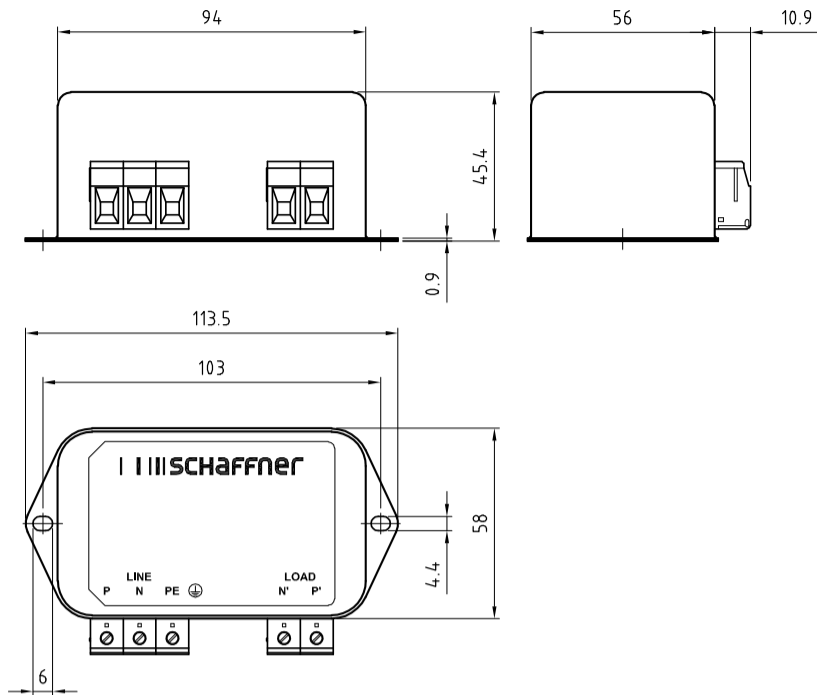

All dimensions in mm; 1 inch = 25.4 mm ; Tolerances according: ISO 2768-m/EN 22768-m

### Filter Input/Output Connector Cross Sections

	<b>-29</b>
<b>Solid wire</b>	6 mm <sup>2</sup>
<b>Flex wire</b>	4 mm <sup>2</sup>
<b>AWG type wire</b>	AWG 10
<b>Recommended torque</b>	0.6-0.8 Nm

### Distribution inventory

Up-to-date inventory levels for global distributors is available at

<https://products.schaffner.com/stock>

or via the QR code printed on the right side



## Headquarters, Global Innovation and Development

### Switzerland

#### Schaffner Holding AG

Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

## Sales and Application Centers

### China

#### Schaffner EMC Ltd. Shanghai

T20-3 C, No 565 Chuangye Road, Pudong district  
201201  
Shanghai  
+86 2138139500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)

### Finland

#### Schaffner Oy

Sauvonrinne 19 H  
8500  
Lohja  
+358 50 468 7284  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

### France

#### Schaffner EMC S.A.S.

16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

### Germany

#### Schaffner Deutschland GmbH

Schoemperlenstrasse 12B  
76185  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

### India

#### Schaffner India Pvt. Ltd

Regus World Trade Centre  
WTC, 22nd Floor Unit No 2238, Brigade Gateway Campus, 26/1, Dr. Rajkumar Road Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

### Italy

#### Schaffner EMC S.r.l.

Via Ticino, 30  
20900  
Monza (MB)  
+39 039 21 41 070  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

### Japan

#### Schaffner EMC K.K.

ISM Sangenjaya 7F  
1-32-12 Kamiuma, Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

### Singapore

#### Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1, #05-09, Kampong Ubi Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

### Spain

#### Schaffner EMC España

Calle Caléndula 93, Miniparc III, Edificio E El Soto de Moraleja, Alcobendas  
28109  
Madrid  
+34 917 912 900  
[spainsales@schaffner.com](mailto:spainsales@schaffner.com)

### Sweden

#### Schaffner EMC AB

Östermalmstrorg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

### Switzerland

#### Schaffner EMV AG

Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### Taiwan

#### Schaffner EMV Ltd.

U-Town  
20 Floor-2, No 97, Section 1, XinTai 5th Road, XiZhi District  
22175  
New Taipei City  
+886 226975500  
[taiwansales@schaffner.com](mailto:taiwansales@schaffner.com)

### Thailand

#### Schaffner EMC Co. Ltd.

Sathorn Square Tower  
Room 3780, 37FL, 98 North-Sathorn Rd, Silom, Bangrak  
10500  
Bangkok  
+66 621056397  
[thailandsales@schaffner.com](mailto:thailandsales@schaffner.com)

### United Kingdom

#### Schaffner Ltd.

1, Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[uksales@schaffner.com](mailto:uksales@schaffner.com)

### United States

#### Schaffner EMC Inc.

52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)

To find your local partner within Schaffner's global network [schaffner.com](http://schaffner.com)

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.