

### FEATURES

- Four 10-bit ADCs
- 10-bit high dynamic range processing
- 12-channel analog input mux
- 10-bit deep color processing
- Analog monitor output
- NTSC/PAL/SECAM color standards support
- NTSC/PAL 3D comb filter
- 3D digital noise reduction (DNR)
- Advanced time base correction (TBC) with frame synchronization
- Interlaced-to-progressive conversion for 525i and 625i
- Advanced VBI data slicer, including Teletext, CC, and V-chip
- IF compensation filter
- SCART fast blank support including slow switch detect
- Programmable internal antialias filters
- Weak, poor time base, and nonstandard signal support
- Vertical peaking, horizontal peaking, CTI, LTI
- Simultaneous interlaced and progressive parallel output for 525i/525p and 625i/625p
- 525p/625p component progressive scan support
- 720p/1080i/1080p component HDTV support
- Digitizes RGB graphics with maximum pixel clock rate of 150 MHz (150 MHz speed grade only)
- 24-bit digital input port supports data from DVI/HDMI Rx IC
- Any-to-any, advanced 3 × 3 color space conversion matrix
- Flexible output pixel interface supporting 8-/10-/16-/20-/24-/30-bit SDR/DDR 4:2:2/4:4:4 data formats
- Programmable interrupt request output pin

### APPLICATIONS

- AV receivers
- LCD HDTVs
- PDP HDTVs
- CRT HDTVs
- HDTV STBs with PVR
- DVD recorders with progressive scan input support
- Projectors

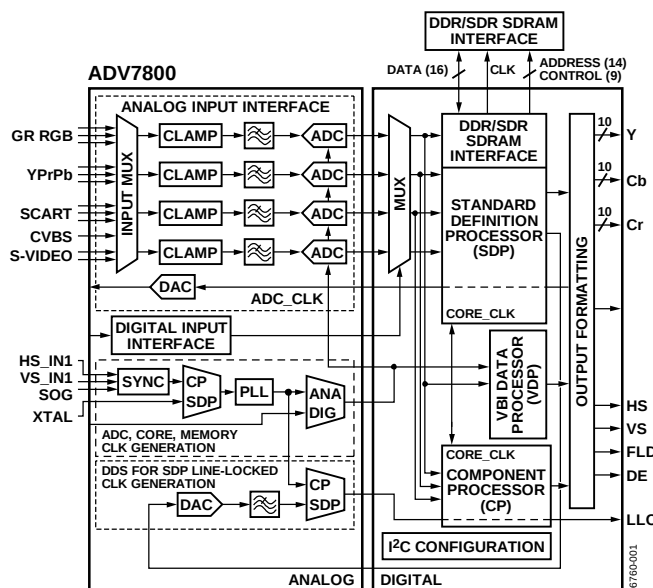


Figure 1. Simplified Functional Block Diagram

### GENERAL DESCRIPTION

The ADV7800<sup>1</sup> is a high quality, single-chip, multiformat 3D comb filter, video decoder, and graphics digitizer. This multiformat 3D comb filter decoder supports the conversion of PAL, NTSC, and SECAM standards in the form of a composite or an S-Video into a digital ITU-R BT.656 format. The ADV7800 also supports the decoding of a component RGB/YPrPb video signal into a digital YCrCb or RGB pixel output stream.

The support for component video includes standards such as 525i, 625i, 525p, 625p, 720p, 1080i, 1080p, and many other HD and SMPTE standards. Graphics digitization is supported by the ADV7800; it is capable of digitizing RGB graphics signals from VGA to SXGA rates and converting them into a digital RGB or YCrCb pixel output stream. SCART and overlay functionality are enabled by the ability of the ADV7800 to simultaneously process CVBS and standard definition RGB signals.

The ADV7800 contains two main processing sections. The first section is the standard definition processor (SDP), which processes all PAL, NTSC, SECAM, and component (up to 525p/625p) signal types. The second section is the component processor (CP), which processes YPrPb and RGB component formats, including RGB graphics.

<sup>1</sup> Protected by U.S. Patent Number 4,907,093 and other intellectual property rights.

Rev. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## TABLE OF CONTENTS

|                                                   |    |                                                   |    |
|---------------------------------------------------|----|---------------------------------------------------|----|
| Features .....                                    | 1  | Key Features .....                                | 13 |
| Applications .....                                | 1  | Analog Front End .....                            | 13 |
| General Description .....                         | 1  | Standard Definition Processor .....               | 13 |
| Revision History .....                            | 2  | VBI Data Processor .....                          | 14 |
| Functional Block Diagram .....                    | 3  | Component Processor .....                         | 14 |
| Specifications .....                              | 4  | Additional Features .....                         | 15 |
| Electrical Characteristics .....                  | 4  | External Memory Requirements .....                | 16 |
| Video Specifications .....                        | 5  | Single Data Rate (SDR) .....                      | 16 |
| Timing Characteristics .....                      | 6  | Double Data Rate (DDR) .....                      | 16 |
| Timing Diagrams .....                             | 7  | Recommended External Loop Filter Components ..... | 17 |
| Analog Specifications .....                       | 8  | Typical Connection Diagrams .....                 | 18 |
| Absolute Maximum Ratings .....                    | 9  | Pixel Input/Output Formatting .....               | 20 |
| Package Thermal Performance .....                 | 9  | Pixel Data Output Modes Highlights .....          | 20 |
| Thermal Resistance .....                          | 9  | Digital Video Input Port Highlights .....         | 20 |
| ESD Caution .....                                 | 9  | Outline Dimensions .....                          | 26 |
| Pin Configuration and Function Descriptions ..... | 10 | Ordering Guide .....                              | 26 |
| Theory of Operation .....                         | 13 |                                                   |    |

## REVISION HISTORY

8/11—Revision C: Initial Version

## FUNCTIONAL BLOCK DIAGRAM

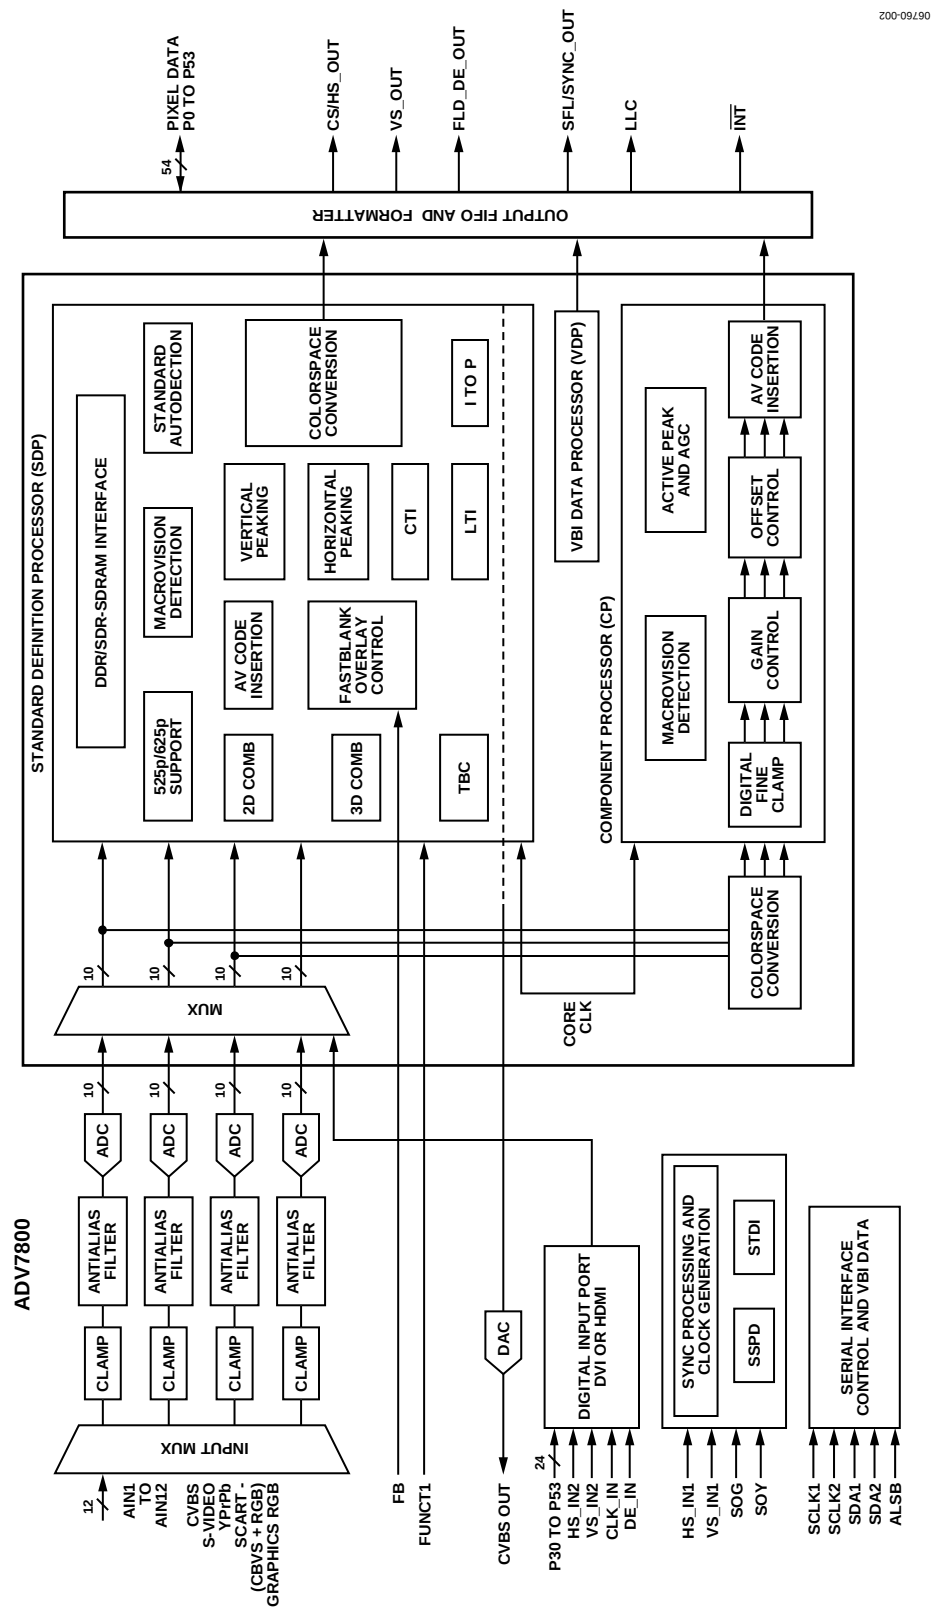


Figure 2.

## SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS

AVDD = 3.15 V to 3.45 V, DVDD = 1.75 V to 1.85 V, DVDDIO = 3.0 V to 3.6 V, DVDDIO\_SDRAM = 2.35 V to 2.65 V (DDR), DVDDIO\_SDRAM = 3.2 V to 3.4 V (SDR), PVDD = 1.71 V to 1.89 V, nominal input range 1.6 V. T<sub>A</sub> = 0°C to 85°C, unless otherwise noted.

Table 1.

| Parameter <sup>1</sup>                 | Symbol            | Test Conditions                    | Min  | Typ       | Max  | Unit |
|----------------------------------------|-------------------|------------------------------------|------|-----------|------|------|
| STATIC PERFORMANCE <sup>2, 3</sup>     |                   |                                    |      |           |      |      |
| Resolution (Each ADC)                  | N                 |                                    |      |           | 10   | Bits |
| Integral Nonlinearity <sup>4</sup>     | INL               | BSL at 27 MHz (at a 10-bit level)  |      | −0.3/+0.4 |      | LSB  |
|                                        |                   | BSL at 54 MHz (at a 10-bit level)  |      | −0.4/+0.5 |      | LSB  |
|                                        |                   | BSL at 74 MHz (at a 10-bit level)  |      | −0.3/+0.2 |      | LSB  |
|                                        |                   | BSL at 110 MHz (at a 10-bit level) |      | −0.3/+0.6 |      | LSB  |
|                                        |                   | BSL at 150 MHz (at an 8-bit level) |      | −0.6/+0.6 |      | LSB  |
| Differential Nonlinearity <sup>4</sup> | DNL               | At 27 MHz (at a 10-bit level)      |      | −0.2/+0.3 |      | LSB  |
|                                        |                   | At 54 MHz (at a 10-bit level)      |      | −0.2/+0.3 |      | LSB  |
|                                        |                   | At 74 MHz (at a 10-bit level)      |      | −0.5/+0.4 |      | LSB  |
|                                        |                   | At 110 MHz (at a 10-bit level)     |      | −0.2/+0.3 |      | LSB  |
|                                        |                   | At 150 MHz (at an 8-bit level)     |      | −0.2/+0.4 |      | LSB  |
| POWER REQUIREMENTS <sup>5</sup>        |                   |                                    |      |           |      |      |
| Digital Core Power Supply              | DVDD              |                                    | 1.75 | 1.8       | 1.85 | V    |
| Digital I/O Power Supply               | DVDDIO            |                                    | 3.0  | 3.3       | 3.6  | V    |
| PLL Power Supply                       | PVDD              |                                    | 1.71 | 1.8       | 1.89 | V    |
| Analog Power Supply                    | AVDD              |                                    | 3.15 | 3.3       | 3.45 | V    |
| Memory Interface Power Supply          | DVDDIO_SDRAM      | DDR                                | 2.35 | 2.5       | 2.65 | V    |
|                                        |                   | SDR                                | 3.2  | 3.3       | 3.4  | V    |
| Digital Core Supply Current            | IDVDD             | CVBS input sampling at 54 MHz      |      | 236       |      | mA   |
|                                        |                   | Graphics RGB sampling at 78 MHz    |      | 103       |      | mA   |
|                                        |                   | SCART RGB FB sampling at 54 MHz    |      | 236       |      | mA   |
|                                        |                   | 525p input sampling at 54 MHz      |      | 319       |      | mA   |
| Digital I/O Supply Current             | IDVDDIO           | CVBS input sampling at 54 MHz      |      | 6         |      | mA   |
|                                        |                   | Graphics RGB sampling at 78 MHz    |      | 15        |      | mA   |
| PLL Supply Current                     | IPVDD             | CVBS input sampling at 54 MHz      |      | 13        |      | mA   |
|                                        |                   | Graphics RGB sampling at 78 MHz    |      | 10        |      | mA   |
| Analog Supply Current                  | IAVDD             | CVBS input sampling at 54 MHz      |      | 99        |      | mA   |
|                                        |                   | Graphics RGB sampling at 78 MHz    |      | 263       |      | mA   |
|                                        |                   | SCART RGB FB sampling at 54 MHz    |      | 269       |      | mA   |
| Memory Interface Supply Current        | IVDDRAM           | CVBS input sampling at 54 MHz      |      | 17        |      | mA   |
| Power-Down Current                     | IPWRDN            |                                    |      | 8         |      | mA   |
| Power-Up Time                          | TPWRUP            |                                    |      | 20        |      | ms   |
| DIGITAL INPUTS                         |                   |                                    |      |           |      |      |
| Input High Voltage                     | V <sub>IH</sub>   |                                    |      | 2         |      | V    |
| Input Low Voltage                      | V <sub>IL</sub>   |                                    |      | 0.8       |      | V    |
| Input Current                          | I <sub>IN</sub>   |                                    |      | ±10       |      | μA   |
| Input Capacitance                      | C <sub>IN</sub>   |                                    |      | 15        |      | pF   |
| DIGITAL OUTPUTS                        |                   |                                    |      |           |      |      |
| Output High Voltage <sup>6</sup>       | V <sub>OH</sub>   | ISOURCE = 0.4 mA                   |      | 2.4       |      | V    |
| Output Low Voltage <sup>6</sup>        | V <sub>OL</sub>   | ISINK = 3.2 mA                     |      | 0.4       |      | V    |
| High Impedance Leakage Current         | I <sub>LEAK</sub> |                                    |      | 10        |      | μA   |
| Output Capacitance                     | C <sub>OUT</sub>  |                                    |      | 20        |      | pF   |

<sup>1</sup> Temperature range T<sub>MIN</sub> to T<sub>MAX</sub>.<sup>2</sup> All ADC linearity tests performed with part configured for component video input.<sup>3</sup> All ADC linearity tests performed at input range of full scale − 12.5% and at zero scale + 12.5%.<sup>4</sup> Maximum INL and DNL specifications obtained with part configured for component video input.<sup>5</sup> Guaranteed by characterization.<sup>6</sup> V<sub>OH</sub> and V<sub>OL</sub> levels obtained using default drive strength.

**VIDEO SPECIFICATIONS**

AVDD = 3.15 V to 3.45 V, DVDD = 1.75 V to 1.85 V, DVDDIO = 3.0 V to 3.6 V, DVDDIO\_SDRAM = 2.35 V to 2.65 V (DDR), DVDDIO\_SDRAM = 3.2 V to 3.4 V (SDR), PVDD = 1.71 V to 1.89 V. T<sub>A</sub> = 0°C to 85°C, unless otherwise noted.

**Table 2.**

| Parameter <sup>1</sup>                 | Symbol | Test Conditions               | Min | Typ  | Max | Unit    |
|----------------------------------------|--------|-------------------------------|-----|------|-----|---------|
| <b>NONLINEAR SPECIFICATIONS</b>        |        |                               |     |      |     |         |
| Differential Phase                     | DP     | CVBS input (modulated 5-step) |     | 0.47 |     | Degrees |
| Differential Gain                      | DG     | CVBS input (modulated 5-step) |     | 0.47 |     | %       |
| Luma Nonlinearity                      | LNL    | CVBS input (modulated 5-step) |     | 0.8  |     | %       |
| <b>NOISE SPECIFICATIONS</b>            |        |                               |     |      |     |         |
| SNR Unweighted                         |        | Luma ramp                     |     | 61   |     | dB      |
|                                        |        | Luma flat field               |     | 62   |     | dB      |
| Analog Front-End Crosstalk             |        |                               |     | 60   |     | dB      |
| <b>LOCK TIME SPECIFICATIONS (SDP)</b>  |        |                               |     |      |     |         |
| Horizontal Lock Range                  |        |                               |     | ±5   |     | %       |
| Vertical Lock Range                    |        |                               | 40  |      | 70  | Hz      |
| Subcarrier Lock Range, f <sub>sc</sub> |        |                               |     | ±0.8 |     | kHz     |
| Color Lock-In Time                     |        |                               |     | 60   |     | Lines   |
| Sync Depth Range <sup>2</sup>          |        |                               | 20  |      | 200 | %       |
| Color Burst Range                      |        |                               | 1   |      | 200 | %       |
| Vertical Lock Time                     |        |                               |     | 300  |     | ms      |
| Horizontal Lock Time                   |        |                               |     | 100  |     | Lines   |
| <b>CHROMA SPECIFICATIONS (SDP)</b>     |        |                               |     |      |     |         |
| Chroma Amplitude Error                 |        |                               |     | 0.4  |     | %       |
| Chroma Phase Error                     |        |                               |     | 0.3  |     | Degrees |
| Chroma Luma Intermodulation            |        |                               |     | 0.2  |     | %       |

<sup>1</sup> Guaranteed by characterization.

<sup>2</sup> Nominal sync depth is 300 mV at 100% sync depth range.

**TIMING CHARACTERISTICS**

AVDD = 3.15 V to 3.45 V, DVDD = 1.75 V to 1.85 V, DVDDIO = 3.0 V to 3.6 V, DVDDIO\_SDRAM = 2.35 V to 2.65 V (DDR), DVDDIO\_SDRAM = 3.2 V to 3.4 V (SDR), PVDD = 1.71 V to 1.89 V. T<sub>A</sub> = 0°C to 85°C, unless otherwise noted.

**Table 3.**

| Parameter <sup>1</sup>                      | Symbol                           | Test Conditions                            | Min    | Typ      | Max   | Unit         |
|---------------------------------------------|----------------------------------|--------------------------------------------|--------|----------|-------|--------------|
| <b>SYSTEM CLOCK AND CRYSTAL</b>             |                                  |                                            |        |          |       |              |
| Crystal Nominal Frequency                   |                                  |                                            |        | 28.63636 |       | MHz          |
| Crystal Frequency Stability                 |                                  |                                            |        |          | ±50   | ppm          |
| Horizontal Sync Input Frequency             |                                  |                                            | 14.8   |          | 90    | kHz          |
| LLC Frequency Range                         |                                  |                                            | 12.825 |          | 150   | MHz          |
| <b>I<sup>2</sup>C PORT</b>                  |                                  |                                            |        |          |       |              |
| SCLK Frequency                              |                                  |                                            |        |          | 400   | kHz          |
| SCLK Minimum Pulse Width High               | t <sub>1</sub>                   |                                            | 0.6    |          |       | μs           |
| SCLK Minimum Pulse Width Low                | t <sub>2</sub>                   |                                            | 1.3    |          |       | μs           |
| Hold Time (Start Condition)                 | t <sub>3</sub>                   |                                            | 0.6    |          |       | μs           |
| Setup Time (Start Condition)                | t <sub>4</sub>                   |                                            | 0.6    |          |       | μs           |
| SDA Setup Time                              | t <sub>5</sub>                   |                                            | 100    |          |       | ns           |
| SCLK and SDA Rise Time                      | t <sub>6</sub>                   |                                            |        |          | 300   | ns           |
| SCLK and SDA Fall Time                      | t <sub>7</sub>                   |                                            |        |          | 300   | ns           |
| Setup Time (Stop Condition)                 | t <sub>8</sub>                   |                                            |        | 0.6      |       | μs           |
| <b>FAST I<sup>2</sup>C PORT<sup>2</sup></b> |                                  |                                            |        |          |       |              |
| SCLK Frequency                              |                                  |                                            |        |          | 3.4   | MHz          |
| SCLK Minimum Pulse Width High               | t <sub>1</sub>                   |                                            | 60     |          |       | ns           |
| SCLK Minimum Pulse Width Low                | t <sub>2</sub>                   |                                            | 160    |          |       | ns           |
| Hold Time (Start Condition)                 | t <sub>3</sub>                   |                                            | 160    |          |       | ns           |
| Setup Time (Start Condition)                | t <sub>4</sub>                   |                                            | 160    |          |       | ns           |
| SDA Setup Time                              | t <sub>5</sub>                   |                                            | 10     |          |       | ns           |
| SCLK and SDA Rise Time                      | t <sub>6</sub>                   |                                            | 10     |          | 80    | ns           |
| SCLK and SDA Fall Time                      | t <sub>7</sub>                   |                                            | 10     |          | 80    | ns           |
| Setup Time (Stop Condition)                 | t <sub>8</sub>                   |                                            | 160    |          |       | ns           |
| <b>RESET FEATURE</b>                        |                                  |                                            |        |          |       |              |
| Reset Pulse Width                           |                                  |                                            | 5      |          |       | ms           |
| <b>CLOCK OUTPUTS</b>                        |                                  |                                            |        |          |       |              |
| LLC Mark Space Ratio                        | t <sub>9</sub> , t <sub>10</sub> |                                            | 45:55  |          | 55:45 | % duty cycle |
| <b>DATA AND CONTROL OUTPUTS<sup>3</sup></b> |                                  |                                            |        |          |       |              |
| Data Output Transition Time, SDR (SD Core)  | t <sub>11</sub>                  | Negative clock edge to start of valid data |        |          | 4.5   | ns           |
| Data Output Transition Time, SDR (SD Core)  | t <sub>12</sub>                  | End of valid data to negative clock edge   |        |          | 0     | ns           |
| Data Output Transition Time, SDR (CP Core)  | t <sub>13</sub>                  | Negative clock edge to start of valid data |        |          | 2.5   | ns           |
| Data Output Transition Time, SDR (CP Core)  | t <sub>14</sub>                  | End of valid data to negative clock edge   |        |          | 0.2   | ns           |
| <b>DATA AND CONTROL INPUTS<sup>4</sup></b>  |                                  |                                            |        |          |       |              |
| Input Setup Time (Digital Input Port)       | t <sub>17</sub>                  | HS_IN1, VS_IN1<br>HS_IN2, VS_IN2           | 9.5    |          |       | ns           |
| Input Hold Time (Digital Input Port)        | t <sub>18</sub>                  | DE_IN, data inputs                         | 2      |          |       | ns           |
|                                             |                                  | HS_IN1, VS_IN1<br>HS_IN2, VS_IN2           | —4     |          |       | ns           |
|                                             |                                  | DE_IN, data inputs                         | 0.8    |          |       | ns           |

<sup>1</sup> Guaranteed by characterization.<sup>2</sup> With a bus line load less than 100 pF.<sup>3</sup> Timing figures obtained using default drive strength value.<sup>4</sup> TTL input values are 0 V to 3 V, with rise/fall times ≥ 3 ns, measured between the 10% and 90% points.

## TIMING DIAGRAMS

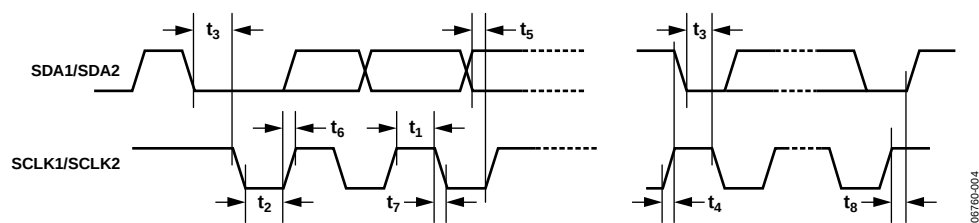


Figure 3. I²C Timing

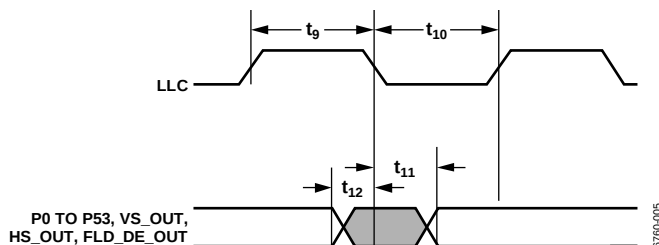


Figure 4. Pixel Port and Control SDR Output Timing (SD Core)

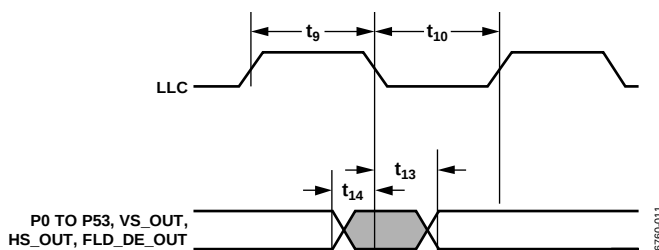


Figure 5. Pixel Port and Control SDR Output Timing (CP Core)

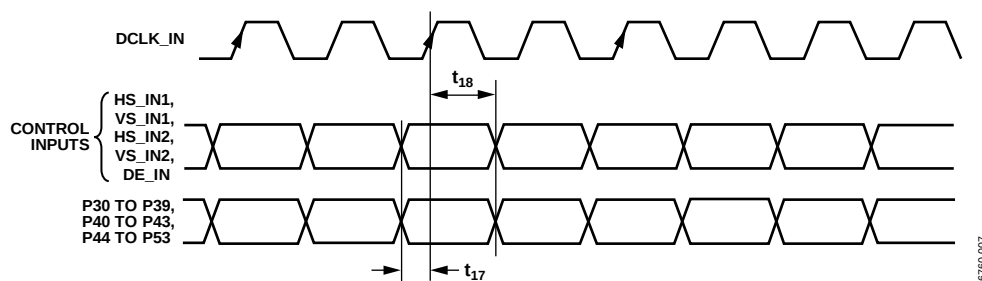


Figure 6. Digital Input Port and Control Input Timing

**ANALOG SPECIFICATIONS**

AVDD = 3.15 V to 3.45 V, DVDD = 1.75 V to 1.85 V, DVDDIO = 3.0 V to 3.6 V, DVDDIO\_SDRAM = 2.35 V to 2.65 V (DDR), DVDDIO\_SDRAM = 3.2 V to 3.4 V (SDR), PVDD = 1.71 V to 1.89 V.  $T_A$  = 0°C to 85°C, unless otherwise noted. Recommended analog input video signal range is 0.5 V to 1.6 V, typically 1 V p-p. Recommended external clamp capacitor value is 0.1  $\mu$ F.

**Table 4.**

| Parameter <sup>1, 2</sup>      | Test Conditions                   | Min | Typ         | Max | Unit       |
|--------------------------------|-----------------------------------|-----|-------------|-----|------------|
| <b>CLAMP CIRCUITRY</b>         |                                   |     |             |     |            |
| Input Impedance <sup>3</sup>   | Clamps switched off               |     | 10          |     | M $\Omega$ |
| Input Impedance of Pin 90 (FB) |                                   |     | 20          |     | k $\Omega$ |
| CML                            |                                   |     | 2.0         |     | V          |
| ADC Full-Scale Level           |                                   |     | CML + 0.8   |     | V          |
| ADC Zero-Scale Level           |                                   |     | CML – 0.8   |     | V          |
| ADC Dynamic Range              |                                   |     | 1.6         |     | V          |
| Clamp Level (When Locked)      | CVBS input                        |     | CML – 0.292 |     | V          |
|                                | SCART RGB input (R, G, B signals) |     | CML – 0.3   |     | V          |
|                                | S-Video input (Y signal)          |     | CML – 0.292 |     | V          |
|                                | S-Video input (C signal)          |     | CML – 0     |     | V          |
|                                | Component input (Y signal)        |     | CML – 0.3   |     | V          |
|                                | Component input (Pr, Pb signals)  |     | CML – 0     |     | V          |
|                                | PC RGB input (R, G, B signals)    |     | CML – 0.3   |     | V          |
| Large Clamp Source Current     | SDP only                          |     | 0.75        |     | mA         |
| Large Clamp Sink Current       | SDP only                          |     | 0.9         |     | mA         |
| Fine Clamp Source Current      | SDP only                          |     | 17          |     | $\mu$ A    |
| Fine Clamp Sink Current        | SDP only                          |     | 17          |     | $\mu$ A    |

<sup>1</sup> The minimum/maximum specifications are guaranteed over 0°C to 85°C.

<sup>2</sup> Guaranteed by characterization.

<sup>3</sup> Except Pin 90 (FB).

## ABSOLUTE MAXIMUM RATINGS

Table 5.

| Parameter                                          | Rating                                     |
|----------------------------------------------------|--------------------------------------------|
| AVDD to AGND                                       | 4.0 V                                      |
| DVDD to DGND                                       | 2.2 V                                      |
| PVDD to AGND                                       | 2.2 V                                      |
| DVDDIO to DGND                                     | 4.0 V                                      |
| DVDDIO_SDRAM to DGND_SDRAM (DDR)                   | 2.7 V                                      |
| DVDDIO_SDRAM to DGND_SDRAM (SDR)                   | 4.0 V                                      |
| DVDDIO to AVDD                                     | –0.3 V to +0.3 V                           |
| DVDDIO to DVDD                                     | –0.3 V to +2 V                             |
| DVDDIO_SDRAM to DVDD (DDR)                         | –0.3 V to +2.5 V                           |
| DVDDIO_SDRAM to DVDD (SDR)                         | –0.3 V to +3.3 V                           |
| AVDD to PVDD                                       | –0.3 V to +2 V                             |
| AVDD to DVDD                                       | –0.3 V to +2 V                             |
| DVDDIO to DVDDIO_SDRAM (DDR)                       | –0.3 V to +2 V                             |
| DVDDIO to DVDDIO_SDRAM (SDR)                       | –0.3 V to +3.3 V                           |
| AVDD to DVDDIO_SDRAM (DDR)                         | –0.3 V to +2.5 V                           |
| AVDD to DVDDIO_SDRAM (SDR)                         | –0.3 V to +1.8 V                           |
| Digital Inputs Voltage to DGND                     | DGND – 0.3 V to DVDDIO + 0.3 V             |
| DVDDIO_SDRAM Inputs to DGND_SDRAM                  | DGND_SDRAM – 0.3 V to DVDDIO_SDRAM + 0.3 V |
| Analog Inputs to AGND                              | AGND – 0.3 V to AVDD + 0.3 V               |
| SCLK/SDA Data Pins to DVDDIO                       | DVDDIO – 0.3 V to DVDDIO + 3.6 V           |
| Maximum Junction Temperature (T <sub>J MAX</sub> ) | 125°C                                      |
| Storage Temperature Range                          | –65°C to +150°C                            |
| Infrared Reflow Soldering (20 sec)                 | 260°C                                      |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## PACKAGE THERMAL PERFORMANCE

To reduce power consumption when using the part, the user is advised to turn off any unused ADCs.

The junction temperature must always stay below the maximum junction temperature (T<sub>J MAX</sub>) of 125°C. This equation shows how to calculate the junction temperature:

$$T_J = T_{A MAX} + (\theta_{JA} \times W_{MAX})$$

where:

$$T_{A MAX} = 85^\circ\text{C}$$

$$\theta_{JA} = 21.0330^\circ\text{C/W}$$

$$W_{MAX} = ((AVDD \times I_{AVDD}) + (DVDD \times I_{DVDD}) + (DVDDIO \times I_{DVDDIO}) + (PVDD \times I_{PVDD}) + (DVDD\_SDRAM \times I_{DVDD\_SDRAM})).$$

## THERMAL RESISTANCE

θ<sub>JA</sub> is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 6. Thermal Resistance

| Package Type  | θ <sub>JA</sub> <sup>1</sup> | θ <sub>JC</sub> <sup>2</sup> | Unit |
|---------------|------------------------------|------------------------------|------|
| 176-Lead LQFP | 21                           | 7                            | °C/W |

<sup>1</sup> 4-layer PCB with solid ground plane.

<sup>2</sup> 4-layer PCB with solid ground plane (still air).

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

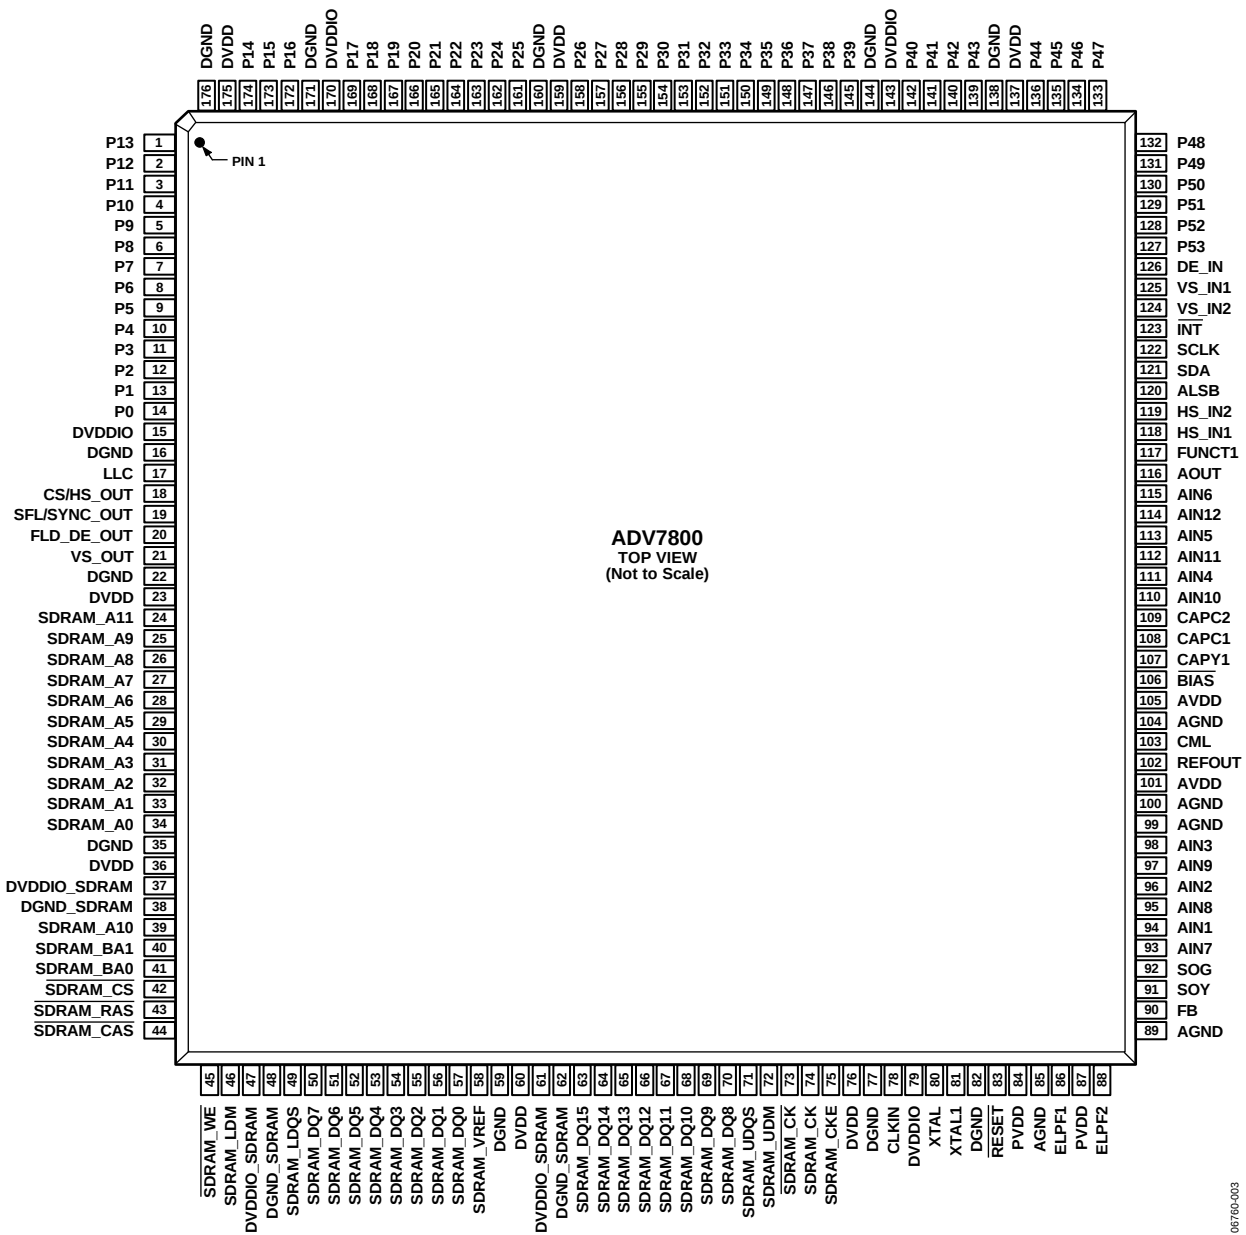


Figure 7. Pin Configuration

Table 7. Pin Function Descriptions

| Pin No.                                         | Mnemonic                | Type <sup>1</sup> | Description                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|-------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 to 14, 155 to 158, 161 to 169, 172 to 174     | P0 to P29               | O                 | Video Pixel Output Port. See Figure 7 for details on pin mapping.                                                                                                                                                                                                                             |
| 15, 79, 143, 170                                | DVDDIO                  | P                 | Digital Input/Output Supply Voltage (3.3 V).                                                                                                                                                                                                                                                  |
| 16, 22, 35, 59, 77, 82, 138, 144, 160, 171, 176 | DGND                    | GND               | Digital Ground.                                                                                                                                                                                                                                                                               |
| 17                                              | LLC                     | O                 | Line-Locked Output Clock for the Pixel Data.                                                                                                                                                                                                                                                  |
| 18                                              | CS/HS_OUT               | O                 | Horizontal Synchronization or Composite Synchronization Signal. This signal can be selected while in SDP mode.                                                                                                                                                                                |
| 19                                              | SFL/SYNC_OUT            | O                 | Subcarrier Frequency Lock. This pin contains a serial output stream, which can be used to lock the subcarrier frequency when this decoder is connected to any digital video encoder from Analog Devices, Inc. SYNC_OUT is the sliced synchronization output signal available only in CP mode. |
| 20                                              | FLD_DE_OUT              | O                 | Field Synchronization Output Signal (All Interlaced Video Modes). This pin can also be enabled as a data enable signal (DE) to allow direct connection to a HDMI™/DVI Tx IC.                                                                                                                  |
| 21                                              | VS_OUT                  | O                 | Vertical Synchronization Output Signal (SDP and CP modes).                                                                                                                                                                                                                                    |
| 23, 36, 60, 76, 137, 159, 175                   | DVDD                    | P                 | Digital Core Supply Voltage (1.8 V).                                                                                                                                                                                                                                                          |
| 24 to 34, 39                                    | SDRAM_A0 to SDRAM_A11   | O                 | Address Outputs. Interface to external RAM address lines. See Figure 7 for details on pin mapping.                                                                                                                                                                                            |
| 37, 47, 61                                      | DVDDIO_SDRAM            | P                 | External Memory Interface Digital Input/Output Supply (2.5 V for DDR, or 3.3 V for SDR).                                                                                                                                                                                                      |
| 38, 48, 62                                      | DGND_SDRAM              | GND               | External Memory Interface Digital GND.                                                                                                                                                                                                                                                        |
| 40, 41                                          | SDRAM_BA1, SDRAM_BA0    | O                 | Bank Address Outputs. Interface to external RAM bank address lines.                                                                                                                                                                                                                           |
| 42                                              | SDRAM_CS                | O                 | SDRAM_CS is a chip select function that enables and disables the command decoder on the RAM.                                                                                                                                                                                                  |
| 43                                              | SDRAM_RAS               | O                 | Row Address Select Command Signal. SDRAM_RAS, SDRAM_CAS, SDRAM_WE, and SDRAM_CS define the command to the RAM.                                                                                                                                                                                |
| 44                                              | SDRAM_CAS               | O                 | Column Address Select Command Signal. SDRAM_RAS, SDRAM_CAS, SDRAM_WE, and SDRAM_CS define the command to the RAM.                                                                                                                                                                             |
| 45                                              | SDRAM_WE                | O                 | Write Enable Output Command Signal. SDRAM_RAS, SDRAM_CAS, SDRAM_WE, and SDRAM_CS define the command to the RAM.                                                                                                                                                                               |
| 46, 72                                          | SDRAM_LDM, SDRAM_UDM    | O                 | Data Mask Output. Data is masked when DM is high, for write data to the external RAM. LDM corresponds to the data on SDRAM_DQ0 to SDRAM_DQ7, and UDM corresponds to the data on SDRAM_DQ8 to SDRAM_DQ15.                                                                                      |
| 49                                              | SDRAM_LDQS              | I/O               | Lower Data Strobe Pin. Data strobe pins are used for the RAM interface. This is an output with read data and an input with write data. It is edge aligned with write data and centered in read data. SDRAM_LDQS corresponds to the data on SDRAM_DQ0 to SDRAM_DQ7.                            |
| 50 to 57, 63 to 70                              | SDRAM_DQ0 to SDRAM_DQ15 | I/O               | Data Bus. Interface to external RAM 16-bit data bus. See Figure 7 for details on pin mapping.                                                                                                                                                                                                 |
| 58                                              | SDRAM_VREF              | P                 | 1.25 V reference for DDR SDRAM interface or 1.65 V for SDR SDRAM interface.                                                                                                                                                                                                                   |
| 71                                              | SDRAM_UDQS              | I/O               | Upper Data Strobe Pin. Data strobe pins for the RAM interface. This is an output with read data and an input with write data. It is edge aligned with write data and centered in read data. SDRAM_UDQS corresponds to the data on SDRAM_DQ8 to SDRAM_DQ16.                                    |
| 73, 74                                          | SDRAM_CK, SDRAM_CK      | O                 | Differential Clock Output. All address and control output signals to the RAM should be sampled on the positive edge of SDRAM_CK and on the negative edge of SDRAM_CK.                                                                                                                         |
| 75                                              | SDRAM_CKE               | O                 | Clock Enable. This pin is used to enable the clock signals of the external RAM.                                                                                                                                                                                                               |
| 78                                              | CLKIN                   | I                 | Clock Input Signal. Used in 24-bit digital input mode (for example, processing 24-bit RGB data from a DVI/HDMI Rx IC) and also in digital CVBS input mode.                                                                                                                                    |

| Pin No.                            | Mnemonic      | Type <sup>1</sup> | Description                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------|---------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 80                                 | XTAL          | I                 | Crystal Input. Input pin for 28.63636 MHz crystal.                                                                                                                                                                                                                                                                                           |
| 81                                 | XTAL1         | O                 | Crystal Output. This pin should be connected to the 28.63636 MHz crystal.                                                                                                                                                                                                                                                                    |
| 83                                 | RESET         | I                 | System Reset Input. Active low. A minimum low reset pulse width of 5 ms is required to reset the ADV7800 circuitry.                                                                                                                                                                                                                          |
| 84, 87                             | PVDD          | P                 | PLL Supply Voltage (1.8 V).                                                                                                                                                                                                                                                                                                                  |
| 85, 89, 99, 100, 104               | AGND          | GND               | Analog Ground.                                                                                                                                                                                                                                                                                                                               |
| 86, 88                             | ELPF1, ELPF2  | I                 | External Loop Filter. The recommend external loop filter must be connected to each ELPF pin (see Figure 8).                                                                                                                                                                                                                                  |
| 90                                 | FB            | I                 | SCART Fast Blank Input.                                                                                                                                                                                                                                                                                                                      |
| 91                                 | SOY           | I                 | Sync On Luma Input. Used in embedded synchronization mode.                                                                                                                                                                                                                                                                                   |
| 92                                 | SOG           | I                 | Sync On Green Input. Used in embedded synchronization mode.                                                                                                                                                                                                                                                                                  |
| 93 to 98, 110 to 115               | AIN1 to AIN12 | I                 | Analog Video Input Channels. See Figure 7 for details on pin mapping.                                                                                                                                                                                                                                                                        |
| 101, 105                           | AVDD          | P                 | Analog Supply Voltage (3.3 V).                                                                                                                                                                                                                                                                                                               |
| 102                                | REFOUT        | O                 | Internal Voltage Reference Output.                                                                                                                                                                                                                                                                                                           |
| 103                                | CML           | O                 | Common-Mode Level Pin Used for the Internal ADCs.                                                                                                                                                                                                                                                                                            |
| 106                                | BIAS          | O                 | External Bias Setting Pin. Connect the recommended resistor (1.35 k $\Omega$ ) between the pin and ground.                                                                                                                                                                                                                                   |
| 107                                | CAPY1         | I                 | ADC Capacitor Network.                                                                                                                                                                                                                                                                                                                       |
| 108, 109                           | CAPC1, CAPC2  | I                 | ADC Capacitor Network.                                                                                                                                                                                                                                                                                                                       |
| 116                                | AOUT          | O                 | Analog Monitor Output.                                                                                                                                                                                                                                                                                                                       |
| 117                                | FUNCT1        | I                 | SCART Function Select Input.                                                                                                                                                                                                                                                                                                                 |
| 118                                | HS_IN1        | I                 | Horizontal Synchronization Input Signal. Used in CP mode for 5-wire timing mode.                                                                                                                                                                                                                                                             |
| 119                                | HS_IN2        | I/O               | Horizontal Synchronization Input Signal. Used in 24-bit digital input mode port mode (for example, processing 24-bit RGB data from an HDMI Rx IC). HS_IN2 in conjunction with VS_IN2 can be configured as a fast I <sup>2</sup> C interface for teletext data extraction. HS_IN2 is used as the I <sup>2</sup> C port serial clock input.    |
| 120                                | ALSB          | I                 | ALSB selects the I <sup>2</sup> C address for the ADV7800 control. ALSB set to Logic 0 configures the address for a write to the input/output port of 0x40. ALSB set to Logic 1 configures the address for a write to the input/output port of 0x42.                                                                                         |
| 121                                | SDA           | I/O               | I <sup>2</sup> C Port Serial Data Input/Output Pin.                                                                                                                                                                                                                                                                                          |
| 122                                | SCLK          | I                 | I <sup>2</sup> C Port Serial Clock Input (Maximum Clock Rate of 400 kHz).                                                                                                                                                                                                                                                                    |
| 123                                | INT           | O                 | Interrupt Output. This pin can be active low or active high. When SDP/CP status bits change, this pin triggers. The set of events that triggers an interrupt is under user control.                                                                                                                                                          |
| 124                                | VS_IN2        | I/O               | Vertical Synchronization Input Signal. Used in 24-bit digital input mode (for example, processing 24-bit RGB data from an DVI/HDMI Rx IC). VS_IN2 in conjunction with HS_IN2 can be configured as a fast I <sup>2</sup> C interface for teletext data extraction. VS_IN2 is used as the I <sup>2</sup> C port serial data input/output pins. |
| 125                                | VS_IN1        | I                 | Vertical Synchronization Input Signal.                                                                                                                                                                                                                                                                                                       |
| 126                                | DE_IN         | I                 | Data Enable Input Signal. Used in 24-bit digital input port mode (for example, processing 24-bit RGB data from an DVI/HDMI Rx IC).                                                                                                                                                                                                           |
| 127 to 136, 139 to 142, 145 to 154 | P30 to P53    | I/O               | Video Pixel Input/Output Port. See Figure 7 for details on pin mapping.                                                                                                                                                                                                                                                                      |

<sup>1</sup> GND = ground, I = input, I/O = input/output, O = output, P = power.

## THEORY OF OPERATION

### KEY FEATURES

The ADV7800 is a high quality, single-chip, multiformat 3D comb filter video decoder, and graphics digitizer. Key features of the device include

- Four 10-bit ADCs
- NTSC/PAL/SECAM video decoder
- Adaptive 3D comb filtering
- 3D digital noise reduction
- Advanced frame time-base correction (TBC)
- Composite, S-Video, YPrPb/RGB SCART support
- YPrPb component HD and RGB graphics input support
- 30-bit digital YPrPb/RGB output supporting 10-bit deep color

### ANALOG FRONT END

The ADV7800 analog front end comprises four 10-bit ADCs that digitize the analog video signal before applying it to the SDP or CP.

The front end includes a 12-channel input mux that enables multiple video signals to be applied to the ADV7800 without the requirement of an external mux. Current and voltage clamps are positioned in front of each ADC to ensure the video signal remains within the range of the converter.

The ADCs are configured to run up to 4× oversampling mode when decoding composite and S-Video inputs or components up to 525i and 625i. 2× oversampling is available for 525p and 625p. All other video standards are 1× oversampled. In oversampling the video signals, a reduction in the cost and complexity of external antialiasing filters can be obtained with the benefit of an increased signal-to-noise ratio (SNR).

Optional internal antialiasing filters with programmable bandwidth are positioned in front of each ADC. These filters can be used to band-limit standard definition video signals, removing spurious, out-of-band noise.

The ADV7800 can support simultaneous processing of CVBS and RGB standard definition signals to enable SCART compatibility and overlay functionality. A combination of CVBS and RGB inputs can be mixed and can be output under the control of I<sup>2</sup>C registers and the fast blank pin.

Analog front-end features include

- Four 150 MHz, 10-bit ADCs that enable true 10-bit video decoding
- 12-channel analog input mux that enables multiple source connections without the requirement of an external mux
- Four current and voltage clamp control loops that ensure any dc offsets are removed from the video signal
- SCART functionality and SD RGB overlay on CVBS controlled by fast blank input
- SCART source switching detection through FUNCT1 input
- Four programmable antialias filters on standard definition video signals and enhance definition
- CVBS monitor output

### STANDARD DEFINITION PROCESSOR

The standard definition processor (SDP) is capable of decoding a large selection of baseband video signals in composite, S-Video, and YUV formats. The video standards supported by the SDP include PAL, PAL 60, PAL M, PAL N, PAL NC, NTSC M/J, NTSC 4.43, and SECAM. The ADV7800 can automatically detect the video standard and process it accordingly. The ADV7800 can process video up to 525p/625p formats.

The SDP has a 3D temporal comb filter and a 5-line adaptive 2D comb filter that gives superior chrominance and luminance separation when decoding a composite video signal. This highly adaptive filter automatically adjusts its processing mode according to the video standard and signal quality with no user intervention required. The SDP has an IF filter block that compensates for attenuation in the high frequency chroma spectrum due to a tuner SAW filter. The SDP has specific luminance and chrominance parameter controls for brightness, contrast, saturation, and hue.

The ADV7800 implements a patented adaptive digital line length tracking (ADLLT) algorithm to track varying video line lengths from sources such as a VCR. ADLLT enables the ADV7800 to track and decode poor quality video sources (such as VCRs) and noisy sources (such as tuner outputs, VCRs, and camcorders). Frame TBC ensures stable clock synchronization between the decoder and the downstream devices to prevent disruptions.

The SDP also contains both a luma transient improvement (LTI) and a chroma transient improvement (CTI) processor. This processor increases the edge rate on the luma and chroma transitions, resulting in a sharper video image.

The SDP has a Macrovision® detection circuit, which allows Type I, Type II, and Type III Macrovision protection levels. The decoder is also fully robust to all Macrovision signal inputs.

SDP features include

- Full automatic detection and autoswitching of all worldwide standards (PAL, NTSC, and SECAM)
- Advanced adaptive 3D comb with concurrent 3D noise reduction (using either external DDR or SDR memory)
- Adaptive 2D 5-line comb filters for NTSC and PAL that give superior chrominance and luminance separation for composite video
- Automatic gain control with white peak mode that ensures the video is always processed without loss of the video processing range
- Proprietary architecture for locking to weak, noisy, and unstable sources from VCRs and tuners
- IF filter block that compensates for high frequency luma attenuation due to a tuner SAW filter
- LTI and CTI
- Vertical and horizontal programmable luma peaking filters
- 10-bit deep color processing path from front to back end in RGB/YCrCb formats
- Macrovision copy protection detection on composite and S-Video for all worldwide formats (PAL, NTSC, and SECAM)
- 4× oversampling (54 MHz) for CVBS, S-Video, and YUV modes
- 2× oversampling (54 MHz) for 525p and 625p modes
- Line-locked clock output (LLC)
- Free run output mode that provides stable timing when no video input is present
- Internal color bar test pattern
- Advanced TBC with frame synchronization, which ensures nominal clock and data for nonstandard input
- Interlace-to-progressive conversion for 525i and 625i formats, enabling direct drive of HDMI Tx devices
- Color controls that include hue, brightness, saturation, and contrast
- Differential gain (DG), typically 0.45%
- Differential phase (DP), typically 0.45°
- Video SNR, typically 61 dB

## VBI DATA PROCESSOR

The VBI data processor (VDP) of the ADV7800 is capable of slicing multiple vertical blanking interval data standards on SD video and component video. The VDP decodes the VBI data on the incoming CVBS/YC or YUV data processed by the SDP core. It can also decode VBI data on the luma channel of YUV data processed through the CP core.

The VDP can process a variety of VBI data services, such as

- Teletext
- Video programming system (VPS)
- Vertical interval time codes (VITC)
- Closed captioning (CC) and extended data service (EDS)
- Wide screen signaling (WSS)
- Copy generation management system (CGMS, CGMS Type B)
- Gemstar® 1×/2× electronic program guide compatible
- Extended data service (SDS); the data extracted can be read back over a fast I<sup>2</sup>C interface

## COMPONENT PROCESSOR

The component processor (CP) is capable of decoding and digitizing a wide range of component video formats in any color space. The CP can accept video data from the analog front end or from the HDMI receiver. Component video standards supported by the CP include 525i, 625i, 525p, 625p, 720p, 1080i, 1080p, and VGA (up to SXGA at 75 Hz), and many other standards.

A fully programmable any-to-any, 3 × 3 color space conversion (CSC) matrix is placed before the CP. This enables YPrPb-to-RGB and RGB-to-YCrCb conversions of video data coming from the analog front end or from the HDMI receiver. Many other standards of color space can be implemented using the color space converter.

The CP of the ADV7800 contains an automatic gain control (AGC) block. The AGC is followed by a clamp circuit that ensures the video signal is clamped to the correct blanking level. Automatic adjustments within the CP include gain (contrast) and offset (brightness). Manual adjustment controls are also supported. In cases where no embedded synchronization is preset, the video gain can be set manually.

The CP contains circuitry to enable the detection of Macrovision encoded YPrPb signals for 525i, 625i, 525p, and 625p. It is designed to be fully robust to these types of signals.

CP features include

- 525i, 625i, 525p, 625p, 720p, 1080i, 1080p, and many other HDTV formats supported
- Automatic adjustments including gain (contrast) and offset (brightness); manual adjustment controls also supported
- Support for analog component YPrPb and RGB video formats with embedded synchronization or with separate HS, VS, or CS
- Any-to-any,  $3 \times 3$  color space conversion matrix that supports YCrCb-to-RGB and RGB-to-YCrCb, fully programmable or preprogrammable configurations
- Synchronization source polarity detector (SSPD) that determines the source and polarity of the synchronization signals that accompany the input video
- Macrovision copy protection detection on component formats (525i, 625i, 525p, and 625p)
- Free run output mode that provides stable timing when no video input is present
- Arbitrary pixel sampling support for nonstandard video sources
- 150 MHz conversion rate, which supports RGB input resolutions up to  $1280 \times 1024$  at 75 Hz
- Automatic or manual clamp-and-gain controls for graphics modes

- Contrast, brightness, hue, and saturation controls
- 32-phase DLL that allows optimum pixel clock sampling
- Automatic detection of synchronization source and polarity by SSPD block
- Standard identification enabled by STDI block
- RGB that can be color space converted to YCrCb and decimated to a 4:2:2 format for videocentric back-end IC interfacing
- DE output signal that is supplied for direct connection to HDMI/DVI Tx IC
- Arbitrary pixel sampling support for nonstandard video sources

### ADDITIONAL FEATURES

The ADV7800 also includes

- HS, VS, FIELD, and DE output signals with programmable position, polarity, and width
- Programmable interrupt request output pin ( $\overline{\text{INT}}$ ) that signals SDP/CP status changes
- Two I<sup>2</sup>C host port interface (control and VBI) support
- Integrated programmable antialiasing filters
- 176-lead, 26 mm  $\times$  26 mm, RoHS-compliant LQFP

For more detailed product information about the ADV7800, email [video.products@analog.com](mailto:video.products@analog.com) or contact a local Analog Devices sales representative.

## EXTERNAL MEMORY REQUIREMENTS

### SINGLE DATA RATE (SDR)

The ADV7800 uses SDR external memory for 3D comb, frame synchronizer operation, or 3D-DNR nonconcurrent operation.

- 64 Mb SDR SDRAM minimum memory requirement
- The memory architecture required is four banks of 1 Mb × 16 (4M16)
- Speed grade of 133 MHz at CAS latency (CL) 3 is required
- 22 Ω series termination resistors are recommended for this configuration
- Recommended memory that is compatible with the ADV7800 includes the MT48LC4M16A2 from Micron

### DOUBLE DATA RATE (DDR)

The ADV7800 uses DDR external memory for simultaneous 3D comb, frame synchronizer, and 3D-DNR operation.

- 128 Mb DDR SDRAM minimum memory requirement
- The memory architecture required is four banks of 2 Mb × 16 (8M16)
- Speed grade of 133 MHz at CAS latency (CL) 2.5 is required
- Termination resistors not recommended for this configuration
- Recommended memory that is compatible with the ADV7800 includes K4H281638B-TCB0 from Samsung, the MT46V8M16-TGP-75 from Micron, and the HYB25D128160CE-6 from Infineon

## RECOMMENDED EXTERNAL LOOP FILTER COMPONENTS

The external loop filter components for the ELPF pins should be placed as close as possible to the respective pins. Figure 8 shows the recommended component values.

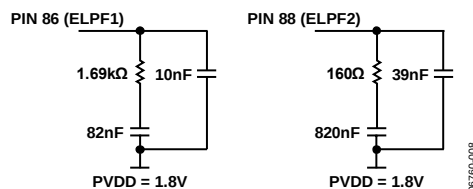


Figure 8. ELPF Components

The schematic diagram illustrates the internal circuitry of the ADV7800 evaluation board. Key components include:

- Power Management:** A DC-DC converter (U1) converts VDD\_1.8V to VDD\_0.9V. It includes feedback resistors R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100.
- Signal Processing:** The ADV7800 IC (U2) handles video signals. It includes input/output buffers and comparators. Key pins include VREF\_IN, VREF\_OUT, VREF\_BIAS, VREF\_OFFSET, VREF\_GAIN, VREF\_LEVEL, VREF\_PULSE, VREF\_WIDTH, VREF\_HEIGHT, VREF\_DEPTH, VREF\_COLOR, VREF\_CHROMA, VREF\_LUMA, VREF\_YCBCR, VREF\_YUV, VREF\_RGB, VREF\_RGBA, VREF\_ARGB, VREF\_ABGR, VREF\_RBG, VREF\_BGR, VREF\_RGBA, VREF\_ARGB, VREF\_ABGR, VREF\_RBG, VREF\_BGR.
- Connectors:** J1 (HDMI), J2 (DVI), J3 (I2C/SMB), J4 (VREF), J5 (CVBS).
- Passive Components:** Numerous resistors (R1-R100) and capacitors (C1-C100) are used for signal conditioning and power filtering.

The diagram also shows the placement of various components on the PCB, including the location of the ADV7800 IC and the associated passive components.

06760-009

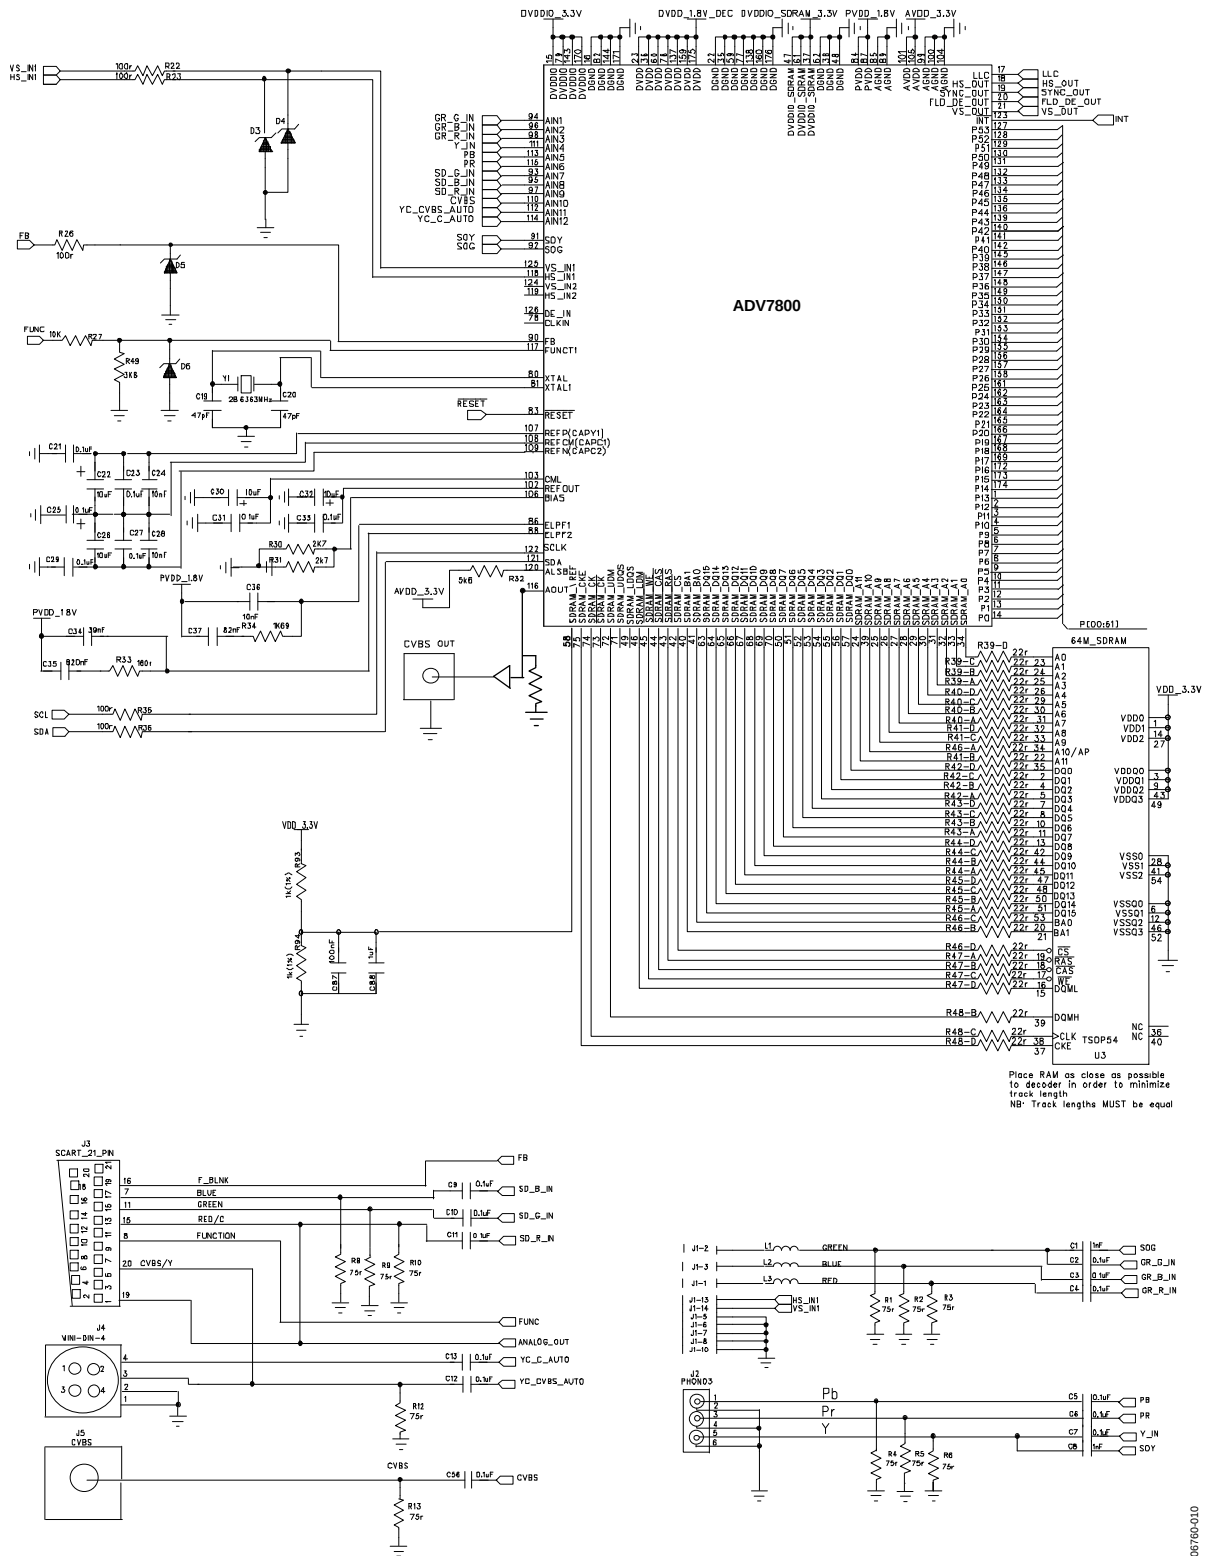


Figure 10. Typical Connection Diagram (External SDR Memory)

06780-010

## PIXEL INPUT/OUTPUT FORMATTING

There are several modes in which the ADV7800 pixel port can be configured. These modes are under the I<sup>2</sup>C control of OP\_FORMAT\_SEL[5:0].

### PIXEL DATA OUTPUT MODES HIGHLIGHTS

The ADV7800 has a flexible pixel port, which can be configured in a variety of formats to accommodate downstream ICs. See Table 8 and Table 9 for more information on each mode. The output pixel port features include

- 8-/10-bit ITU-R BT.656 4:2:2 YCrCb with embedded time codes and/or HS\_OUT, VS\_OUT, and FLD\_DE\_OUT pin timing
- 16-/20-/24-bit YCrCb with embedded time codes and/or HS\_OUT, VS\_OUT, and FLD\_DE\_OUT pin timing
- 24-/30-bit YCrCb/RGB with embedded time codes and/or HS\_OUT, VS\_OUT, and FLD\_DE\_OUT pin timing

- DDR 8-/10-bit 4:2:2 YCrCb for all standards
- DDR 24-/30-bit 4:4:4 RGB for all standards
- Simultaneous output modes 16-/20-bit YCrCb and 8-/10-bit 4:2:2 YCrCb up to 525i/525p and 625i/625p

### DIGITAL VIDEO INPUT PORT HIGHLIGHTS

The ADV7800 contains a 24-bit digital input port. Main features are as follows:

- Support for 24-bit RGB input data from the DVI/HDMI Rx IC, pass-through, or output converted to 4:2:2 YCrCb
- Support for 24-bit 4:4:4, 16-/20-bit 4:2:2 525i, 625i, 525p, 625p, 1080i, 720p, 1080p, and VGA to SXGA at 75 Hz input data from the DVI/HDMI Rx IC chip, pass-through, or output converted to 4:2:2 YCrCb
- Dedicated synchronization and pixel port inputs

Table 8. SDR Pixel Port Output Modes<sup>1</sup>

| OP_FORMAT_SEL [5:0] | 0x00                        | 0x01                         | 0x05                               | 0x06                               | 0x0A                       | 0x2C                       |
|---------------------|-----------------------------|------------------------------|------------------------------------|------------------------------------|----------------------------|----------------------------|
| Pixel Output        | 8-Bit SDR<br>ITU-656 Mode 1 | 10-Bit SDR ITU-656<br>Mode 1 | 16-Bit SDR ITU-656<br>4:2:2 Mode 1 | 20-Bit SDR ITU-656<br>4:2:2 Mode 1 | 24-Bit SDR 4:4:4<br>Mode 1 | 24-Bit SDR 4:4:4<br>Mode 2 |
| P29                 | Y7, Cb7, Cr7                | Y9, Cb9, Cr9                 | Y7                                 | Y9                                 | G7                         | G7                         |
| P28                 | Y6, Cb6, Cr6                | Y8, Cb8, Cr8                 | Y6                                 | Y8                                 | G6                         | G6                         |
| P27                 | Y5, Cb5, Cr5                | Y7, Cb7, Cr7                 | Y5                                 | Y7                                 | G5                         | G5                         |
| P26                 | Y4, Cb4, Cr4                | Y6, Cb6, Cr6                 | Y4                                 | Y6                                 | G4                         | G4                         |
| P25                 | Y3, Cb3, Cr3                | Y5, Cb5, Cr5                 | Y3                                 | Y5                                 | G3                         | G3                         |
| P24                 | Y2, Cb2, Cr2                | Y4, Cb4, Cr4                 | Y2                                 | Y4                                 | G2                         | G2                         |
| P23                 | Y1, Cb1, Cr1                | Y3, Cb3, Cr3                 | Y1                                 | Y3                                 | G1                         | G1                         |
| P22                 | Y0, Cb0, Cr0                | Y2, Cb2, Cr2                 | Y0                                 | Y2                                 | G0                         | G0                         |
| P21                 | Z                           | Y1, Cb1, Cr1                 | Z                                  | Y1                                 | Z                          | B7                         |
| P20                 | Z                           | Y0, Cb0, Cr0                 | Z                                  | Y0                                 | Z                          | B6                         |
| P19                 | Z                           | Z                            | Cb7, Cr7                           | Cb9, Cr9                           | B7                         | B5                         |
| P18                 | Z                           | Z                            | Cb6, Cr6                           | Cb8, Cr8                           | B6                         | B4                         |
| P17                 | Z                           | Z                            | Cb5, Cr5                           | Cb7, Cr7                           | B5                         | B3                         |
| P16                 | Z                           | Z                            | Cb4, Cr4                           | Cb6, Cr6                           | B4                         | B2                         |
| P15                 | Z                           | Z                            | Cb3, Cr3                           | Cb5, Cr5                           | B3                         | B1                         |
| P14                 | Z                           | Z                            | Cb2, Cr2                           | Cb4, Cr4                           | B2                         | B0                         |
| P13                 | Z                           | Z                            | Cb1, Cr1                           | Cb3, Cr3                           | B1                         | R7                         |
| P12                 | Z                           | Z                            | Cb0, Cr0                           | Cb2, Cr2                           | B0                         | R6                         |
| P11                 | Z                           | Z                            | Z                                  | Cb1, Cr1                           | Z                          | R5                         |
| P10                 | Z                           | Z                            | Z                                  | Cb0, Cr0                           | Z                          | R4                         |
| P9                  | Z                           | Z                            | Z                                  | Z                                  | R7                         | R3                         |
| P8                  | Z                           | Z                            | Z                                  | Z                                  | R6                         | R2                         |
| P7                  | Z                           | Z                            | Z                                  | Z                                  | R5                         | R1                         |
| P6                  | Z                           | Z                            | Z                                  | Z                                  | R4                         | R0                         |
| P5                  | Z                           | Z                            | Z                                  | Z                                  | R3                         | Z                          |
| P4                  | Z                           | Z                            | Z                                  | Z                                  | R2                         | Z                          |
| P3                  | Z                           | Z                            | Z                                  | Z                                  | R1                         | Z                          |
| P2                  | Z                           | Z                            | Z                                  | Z                                  | R0                         | Z                          |
| P1                  | Z                           | Z                            | Z                                  | Z                                  | Z                          | Z                          |
| P0                  | Z                           | Z                            | Z                                  | Z                                  | Z                          | Z                          |

<sup>1</sup> It is recommended to print this table (located on this page and the following page) and read as one horizontal expanded table.

| OP_FORMAT_SEL [5:0] | 0x2D                    | 0x2E                    | 0x0B                    | 0x28                                              | 0x29                                               |
|---------------------|-------------------------|-------------------------|-------------------------|---------------------------------------------------|----------------------------------------------------|
| Pixel Output        | 24-Bit SDR 4:4:4 Mode 1 | 24-Bit SDR 4:4:4 Mode 1 | 30-Bit SDR 4:4:4 Mode 1 | 16-Bit and 8-Bit SDR 4:2:2 Mode 1 Parallel Output | 20-Bit and 10-Bit SDR 4:2:2 Mode 1 Parallel Output |
| P29                 | R7                      | B7                      | G9                      | Main Y7                                           | Main Y9                                            |
| P28                 | R6                      | B6                      | G8                      | Main Y6                                           | Main Y8                                            |
| P27                 | R5                      | B5                      | G7                      | Main Y5                                           | Main Y7                                            |
| P26                 | R4                      | B4                      | G6                      | Main Y4                                           | Main Y6                                            |
| P25                 | R3                      | B3                      | G5                      | Main Y3                                           | Main Y5                                            |
| P24                 | R2                      | B2                      | G4                      | Main Y2                                           | Main Y4                                            |
| P23                 | R1                      | B1                      | G3                      | Main Y1                                           | Main Y3                                            |
| P22                 | R0                      | B0                      | G2                      | Main Y0                                           | Main Y2                                            |
| P21                 | G7                      | R7                      | G1                      | Z                                                 | Main Y1                                            |
| P20                 | G6                      | R6                      | G0                      | Z                                                 | Main Y0                                            |
| P19                 | G5                      | R5                      | B9                      | Main Cb7, Cr7                                     | Main Cb9, Cr9                                      |
| P18                 | G4                      | R4                      | B8                      | Main Cb6, Cr6                                     | Main Cb8, Cr8                                      |
| P17                 | G3                      | R3                      | B7                      | Main Cb5, Cr5                                     | Main Cb7, Cr7                                      |
| P16                 | G2                      | R2                      | B6                      | Main Cb4, Cr4                                     | Main Cb6, Cr6                                      |
| P15                 | G1                      | R1                      | B5                      | Main Cb3, Cr3                                     | Main Cb5, Cr5                                      |
| P14                 | G0                      | R0                      | B4                      | Main Cb2, Cr2                                     | Main Cb4, Cr4                                      |
| P13                 | B7                      | G7                      | B3                      | Main Cb1, Cr1                                     | Main Cb3, Cr3                                      |
| P12                 | B6                      | G6                      | B2                      | Main Cb0, Cr0                                     | Main Cb2, Cr2                                      |
| P11                 | B5                      | G5                      | B1                      | Z                                                 | Main Cb1, Cr1                                      |
| P10                 | B4                      | G4                      | B0                      | Z                                                 | Main Cb0, Cr0                                      |
| P9                  | B3                      | G3                      | R9                      | Aux Y7, Cb7, Cr7                                  | Aux Y9, Cb9, Cr9                                   |
| P8                  | B2                      | G2                      | R8                      | Aux Y6, Cb6, Cr6                                  | Aux Y8, Cb8, Cr8                                   |
| P7                  | B1                      | G1                      | R7                      | Aux Y5, Cb5, Cr5                                  | Aux Y7, Cb7, Cr7                                   |
| P6                  | B0                      | G0                      | R6                      | Aux Y4, Cb4, Cr4                                  | Aux Y6, Cb6, Cr6                                   |
| P5                  | Z                       | Z                       | R5                      | Aux Y3, Cb3, Cr3                                  | Aux Y5, Cb5, Cr5                                   |
| P4                  | Z                       | Z                       | R4                      | Aux Y2, Cb2, Cr2                                  | Aux Y4, Cb4, Cr4                                   |
| P3                  | Z                       | Z                       | R3                      | Aux Y1, Cb1, Cr1                                  | Aux Y3, Cb3, Cr3                                   |
| P2                  | Z                       | Z                       | R2                      | Aux Y0, Cb0, Cr0                                  | Aux Y2, Cb2, Cr2                                   |
| P1                  | Z                       | Z                       | R1                      | Z                                                 | Aux Y1, Cb1, Cr1                                   |
| P0                  | Z                       | Z                       | R0                      | Z                                                 | Aux Y0, Cb0, Cr0                                   |

Table 9. DDR Pixel Port Output Modes<sup>1</sup>

| OP_FORMAT_SEL [5:0] | 0x10              |            | 0x11               |            | 0x3D                                |            | 0x3E                                |            |
|---------------------|-------------------|------------|--------------------|------------|-------------------------------------|------------|-------------------------------------|------------|
|                     | 8-Bit DDR ITU-656 |            | 10-Bit DDR ITU-656 |            | 24-Bit DDR 4:2:2 RGB (CLK/2) Mode 1 |            | 24-Bit DDR 4:2:2 RGB (CLK/2) mode 2 |            |
| Pixel Output        | Clock Rise        | Clock Fall | Clock Rise         | Clock Fall | Clock Rise                          | Clock Fall | Clock Rise                          | Clock Fall |
| P29                 | Cb7, Cr7          | Y7         | Cb9, Cr9           | Y9         | B7-0                                | B7-1       | R7-0                                | R7-1       |
| P28                 | Cb6, Cr6          | Y6         | Cb8, Cr8           | Y8         | B6-0                                | B6-1       | R6-0                                | R6-1       |
| P27                 | Cb5, Cr5          | Y5         | Cb7, Cr7           | Y7         | B5-0                                | B5-1       | R5-0                                | R5-1       |
| P26                 | Cb4, Cr4          | Y4         | Cb6, Cr6           | Y6         | B4-0                                | B4-1       | R4-0                                | R4-1       |
| P25                 | Cb3, Cr3          | Y3         | Cb5, Cr5           | Y5         | B3-0                                | B3-1       | R3-0                                | R3-1       |
| P24                 | Cb2, Cr2          | Y2         | Cb4, Cr4           | Y4         | B2-0                                | B2-1       | R2-0                                | R2-1       |
| P23                 | Cb1, Cr1          | Y1         | Cb3, Cr3           | Y3         | B1-0                                | B1-1       | R1-0                                | R1-1       |
| P22                 | Cb0, Cr0          | Y0         | Cb2, Cr2           | Y2         | B0-0                                | B0-1       | R0-0                                | R0-1       |
| P21                 | Z                 | Z          | Cb1, Cr1           | Y1         | R7-0                                | R7-1       | G7-0                                | G7-1       |
| P20                 | Z                 | Z          | Cb0, Cr0           | Y0         | R6-0                                | R6-1       | G6-0                                | G6-1       |
| P19                 | Z                 | Z          | Z                  | Z          | R5-0                                | R5-1       | G5-0                                | G5-1       |
| P18                 | Z                 | Z          | Z                  | Z          | R4-0                                | R4-1       | G4-0                                | G4-1       |
| P17                 | Z                 | Z          | Z                  | Z          | R3-0                                | R3-1       | G3-0                                | G3-1       |
| P16                 | Z                 | Z          | Z                  | Z          | R2-0                                | R2-1       | G2-0                                | G2-1       |
| P15                 | Z                 | Z          | Z                  | Z          | R1-0                                | R1-1       | G1-0                                | G1-1       |
| P14                 | Z                 | Z          | Z                  | Z          | R7-0                                | R7-1       | G0-0                                | G0-1       |
| P13                 | Z                 | Z          | Z                  | Z          | G7-0                                | G7-1       | B7-0                                | B7-1       |
| P12                 | Z                 | Z          | Z                  | Z          | G6-0                                | G6-1       | B6-0                                | B6-1       |
| P11                 | Z                 | Z          | Z                  | Z          | G5-0                                | G5-1       | B5-0                                | B5-1       |
| P10                 | Z                 | Z          | Z                  | Z          | G4-0                                | G4-1       | B4-0                                | B4-1       |
| P9                  | Z                 | Z          | Z                  | Z          | G3-0                                | G3-1       | B3-0                                | B3-1       |
| P8                  | Z                 | Z          | Z                  | Z          | G2-0                                | G2-1       | B2-0                                | B2-1       |
| P7                  | Z                 | Z          | Z                  | Z          | G1-0                                | G1-1       | B1-0                                | B1-1       |
| P6                  | Z                 | Z          | Z                  | Z          | G0-0                                | G0-1       | B0-0                                | B0-1       |
| P5                  | Z                 | Z          | Z                  | Z          | Z                                   | Z          | Z                                   | Z          |
| P4                  | Z                 | Z          | Z                  | Z          | Z                                   | Z          | Z                                   | Z          |
| P3                  | Z                 | Z          | Z                  | Z          | Z                                   | Z          | Z                                   | Z          |
| P2                  | Z                 | Z          | Z                  | Z          | Z                                   | Z          | Z                                   | Z          |
| P1                  | Z                 | Z          | Z                  | Z          | Z                                   | Z          | Z                                   | Z          |
| P0                  | Z                 | Z          | Z                  | Z          | Z                                   | Z          | Z                                   | Z          |


<sup>1</sup> It is recommended to print this table (located on this page and the following page) and read as one horizontal expanded table.

| OP_FORMAT_SEL [5:0] | 0x38                                                      |            | 0x39                                                       |            | 0x3C                        |            |
|---------------------|-----------------------------------------------------------|------------|------------------------------------------------------------|------------|-----------------------------|------------|
| Pixel Output        | 16-Bit and 8-Bit DDR 4:2:2 Mode 1 Parallel Output (CLK/2) |            | 20-Bit and 10-Bit DDR 4:2:2 Mode 1 Parallel Output (CLK/2) |            | 24-Bit DDR 4:2:2RGB (CLK/2) |            |
|                     | Clock Rise                                                | Clock Fall | Clock Rise                                                 | Clock Fall | Clock Rise                  | Clock Fall |
| P29                 | Main Y7                                                   | Main Y7    | Main Y9                                                    | Main Y9    | G7-0                        | G7-1       |
| P28                 | Main Y6                                                   | Main Y6    | Main Y8                                                    | Main Y8    | G6-0                        | G6-1       |
| P27                 | Main Y5                                                   | Main Y5    | Main Y7                                                    | Main Y7    | G5-0                        | G5-1       |
| P26                 | Main Y4                                                   | Main Y4    | Main Y6                                                    | Main Y6    | G4-0                        | G4-1       |
| P25                 | Main Y3                                                   | Main Y3    | Main Y5                                                    | Main Y5    | G3-0                        | G3-1       |
| P24                 | Main Y2                                                   | Main Y2    | Main Y4                                                    | Main Y4    | G2-0                        | G2-1       |
| P23                 | Main Y1                                                   | Main Y1    | Main Y3                                                    | Main Y3    | G1-0                        | G1-1       |
| P22                 | Main Y0                                                   | Main Y0    | Main Y2                                                    | Main Y2    | G0-0                        | G0-1       |
| P21                 | Z                                                         | Z          | Main Y1                                                    | Main Y1    | B7-0                        | B7-1       |
| P20                 | Z                                                         | Z          | Main Y0                                                    | Main Y0    | B6-0                        | B6-1       |
| P19                 | Main Cb7                                                  | Main Cr7   | Main Cb9                                                   | Main Cr9   | B5-0                        | B5-1       |
| P18                 | Main Cb6                                                  | Main Cr6   | Main Cb8                                                   | Main Cr8   | B4-0                        | B4-1       |
| P17                 | Main Cb5                                                  | Main Cr5   | Main Cb7                                                   | Main Cr7   | B3-0                        | B3-1       |
| P16                 | Main Cb4                                                  | Main Cr4   | Main Cb6                                                   | Main Cr6   | B2-0                        | B2-1       |
| P15                 | Main Cb3                                                  | Main Cr3   | Main Cb5                                                   | Main Cr5   | B1-0                        | B1-1       |
| P14                 | Main Cb2                                                  | Main Cr2   | Main Cb4                                                   | Main Cr4   | B0-0                        | B0-1       |
| P13                 | Main Cb1                                                  | Main Cr1   | Main Cb3                                                   | Main Cr3   | R7-0                        | R7-1       |
| P12                 | Main Cb0                                                  | Main Cr0   | Main Cb2                                                   | Main Cr2   | R6-0                        | R6-1       |
| P11                 | Z                                                         | Z          | Main Cb1                                                   | Main Cr1   | R5-0                        | R5-1       |
| P10                 | Z                                                         | Z          | Main Cb0                                                   | Main Cr0   | R4-0                        | R4-1       |
| P9                  | Aux Cb7, Cr7                                              | Aux Y7     | Aux Cb9, Cr9                                               | Aux Y9     | R3-0                        | R3-1       |
| P8                  | Aux Cb6, Cr6                                              | Aux Y6     | Aux Cb8, Cr8                                               | Aux Y8     | R2-0                        | R2-1       |
| P7                  | Aux Cb5, Cr5                                              | Aux Y5     | Aux Cb7, Cr7                                               | Aux Y7     | R1-0                        | R1-1       |
| P6                  | Aux Cb4, Cr4                                              | Aux Y4     | Aux Cb6, Cr6                                               | Aux Y6     | R0-0                        | R0-1       |
| P5                  | Aux Cb3, Cr3                                              | Aux Y3     | Aux Cb5, Cr5                                               | Aux Y5     | Z                           | Z          |
| P4                  | Aux Cb2, Cr2                                              | Aux Y2     | Aux Cb4, Cr4                                               | Aux Y4     | Z                           | Z          |
| P3                  | Aux Cb1, Cr1                                              | Aux Y1     | Aux Cb3, Cr3                                               | Aux Y3     | Z                           | Z          |
| P2                  | Aux Cb0, Cr0                                              | Aux Y0     | Aux Cb2, Cr2                                               | Aux Y2     | Z                           | Z          |
| P1                  | Z                                                         | Z          | Aux Cb1, Cr1                                               | Aux Y1     | Z                           | Z          |
| P0                  | Z                                                         | Z          | Aux Cb0, Cr0                                               | Aux Y0     | Z                           | Z          |

Table 10. Pixel Port Input Modes

| IP_DATA_SEL[5:0] | 0x00               | 0x01               | 0x04               | 0x06               | 0x07              |
|------------------|--------------------|--------------------|--------------------|--------------------|-------------------|
| Pixel Input      | 24-Bit 4:4:4 Input | 20-Bit 4:2:2 Input | 16-Bit 4:2:2 Input | 10-Bit 4:2:2 Input | 8-Bit 4:2:2 Input |
| P53              | G7                 | Y9                 | Y7                 | Y9, Cb9, Cr9       | Y7, Cb7, Cr7      |
| P52              | G6                 | Y8                 | Y6                 | Y8, Cb8, Cr8       | Y6, Cb6, Cr6      |
| P51              | G5                 | Y7                 | Y5                 | Y7, Cb7, Cr7       | Y5, Cb5, Cr5      |
| P50              | G4                 | Y6                 | Y4                 | Y6, Cb6, Cr6       | Y4, Cb4, Cr4      |
| P49              | G3                 | Y5                 | Y3                 | Y5, Cb5, Cr5       | Y3, Cb3, Cr3      |
| P48              | G2                 | Y4                 | Y2                 | Y4, Cb4, Cr4       | Y2, Cb2, Cr2      |
| P47              | G1                 | Y3                 | Y1                 | Y3, Cb3, Cr3       | Y1, Cb1, Cr1      |
| P46              | G0                 | Y2                 | Y0                 | Y2, Cb2, Cr2       | Y0, Cb0, Cr0      |
| P45              | B7                 | Cb9, Cr9           | Cb7, Cr7           | Y1, Cb1, Cr1       | Z                 |
| P44              | B6                 | Cb8, Cr8           | Cb6, Cr6           | Y0, Cb0, Cr0       | Z                 |
| P43              | B5                 | Cb7, Cr7           | Cb5, Cr5           | Z                  | Z                 |
| P42              | B4                 | Cb6, Cr6           | Cb4, Cr4           | Z                  | Z                 |
| P41              | B3                 | Cb5, Cr5           | Cb3, Cr3           | Z                  | Z                 |
| P40              | B2                 | Cb4, Cr4           | Cb2, Cr2           | Z                  | Z                 |
| P39              | B1                 | Cb3, Cr3           | Cb1, Cr1           | Z                  | Z                 |
| P38              | B0                 | Cb2, Cr2           | Cb0, Cr0           | Z                  | Z                 |
| P37              | R7                 | Y1                 | Z                  | Z                  | Z                 |
| P36              | R6                 | Y0                 | Z                  | Z                  | Z                 |
| P35              | R5                 | Z                  | Z                  | Z                  | Z                 |
| P34              | R4                 | Z                  | Z                  | Z                  | Z                 |
| P33              | R3                 | Cb1, Cr1           | Z                  | Z                  | Z                 |
| P32              | R2                 | Cb0, Cr0           | Z                  | Z                  | Z                 |
| P31              | R1                 | Z                  | Z                  | Z                  | Z                 |
| P30              | R0                 | Z                  | Z                  | Z                  | Z                 |

OUTLINE DIMENSIONS

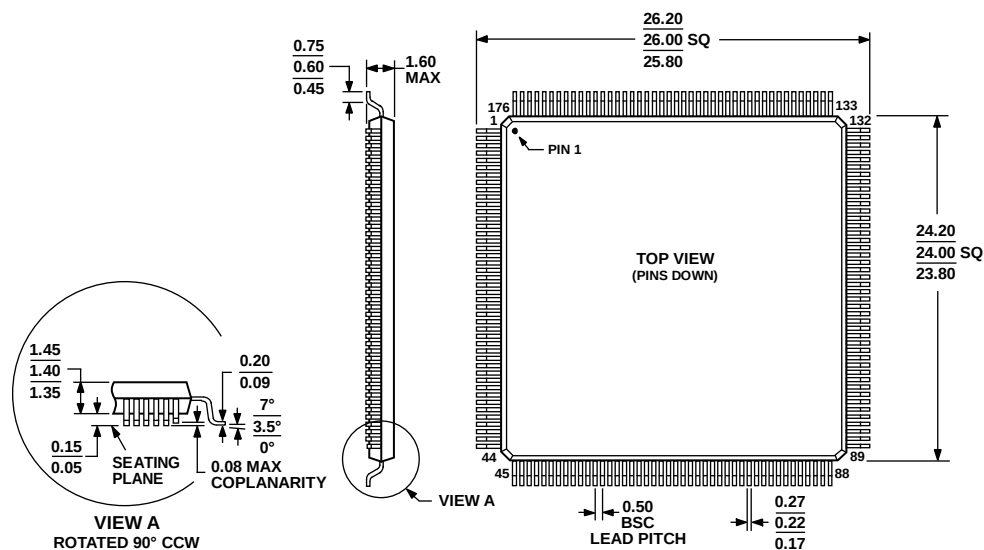

COMPLIANT TO JEDEC STANDARDS MS-026-BG A  
Figure 11. 176-Lead Low Profile Quad Flat Package [LQFP]  
(ST-176)  
Dimensions shown in millimeters

ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                           | Package Option |
|--------------------|-------------------|-----------------------------------------------|----------------|
| ADV7800BSTZ-80     | 0°C to +85°C      | 176-Lead Low Profile Quad Flat Package (LQFP) | ST-176         |
| ADV7800BSTZ-150    | 0°C to +85°C      | 176-Lead Low Profile Quad Flat Package (LQFP) | ST-176         |
| EVAL-ADV7800EB1Z   |                   | Evaluation Board (External DDR SD Memory)     |                |

<sup>1</sup> Z = RoHS Compliant Part.

081706-A

## NOTES

## NOTES

I<sup>2</sup>C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).

©2011 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.  
D06760-0-8/11(C)



[www.analog.com](http://www.analog.com)