

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.

INDUSTRIAL@AMPHENOL
TRUSTED GLOBALLY


Montagezustand /
mounting condition :



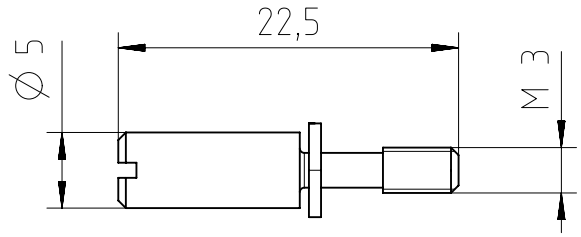

Material: Stahl, verzinkt
material: steel, Zn-plated

Lieferzustand /
delivery condition :

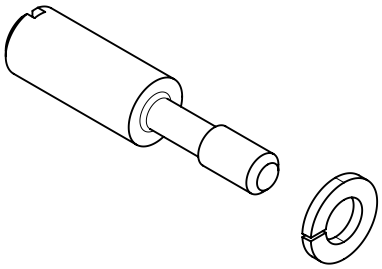

Komponenten loose im PE Beutel
components loose in poly bag

verfügbare Verpackungseinheiten / *avaialble packaging units* :

part number	part name	packaging unit
VN17 050 0004 1	coding pin with spring ring	10
VN17 050 0004 101	coding pin with spring ring	100

01	201600001	16.06.2016	PWÖLF
Index	Änderung/ *Description*	Datum/ *Date*	Name

Gewicht (errechnet) / *Calc WT* : 0,03 kg
Prüfmaß / *Testdimension*
Teileindex
Partindexnumber

Zul. Abw./ *Tolerances* :
ISO 2768-m

DIN / ISO 13715

	Datum/ *Date*	Name
Gez. *Drawn*	16.06.2016	PWÖLF

Status: Released
Inspector: 21.06.2016 MGRIM

Amphenol-Tuchel Electronics GmbH
2.189.273

Maßstab / *Scale* : 2:1 | A4

CUSTOMER DRAWING

Kodierbolzen mit Federring
coding pin with spring ring

M VN17 050 0004 XXX

Blatt/ *Sheet* 1
2 Bl.

Ers. f. / *Replacement for* :

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.


Downloaded from Arrow.com.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design


INDUSTRIAL@AMPHENOL
TRUSTED GLOBALLY

Kodierschema mit Kodierstift VN17 050 0004 XXX
coding schema with coding pin VN17 050 0004 XXX

Für Gehäuse mit einem Kontakteinsatz / *for housing/hoods with one contact insert*

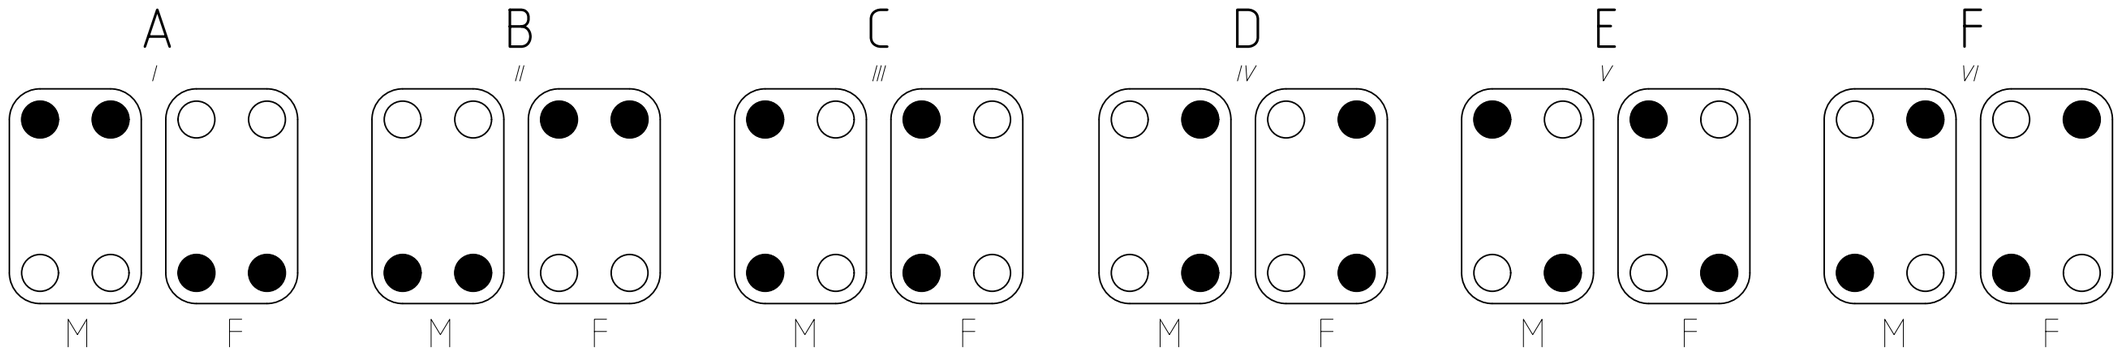

Für Gehäuse mit zwei Kontakteinsätzen / *for housing/hoods with two contact inserts*

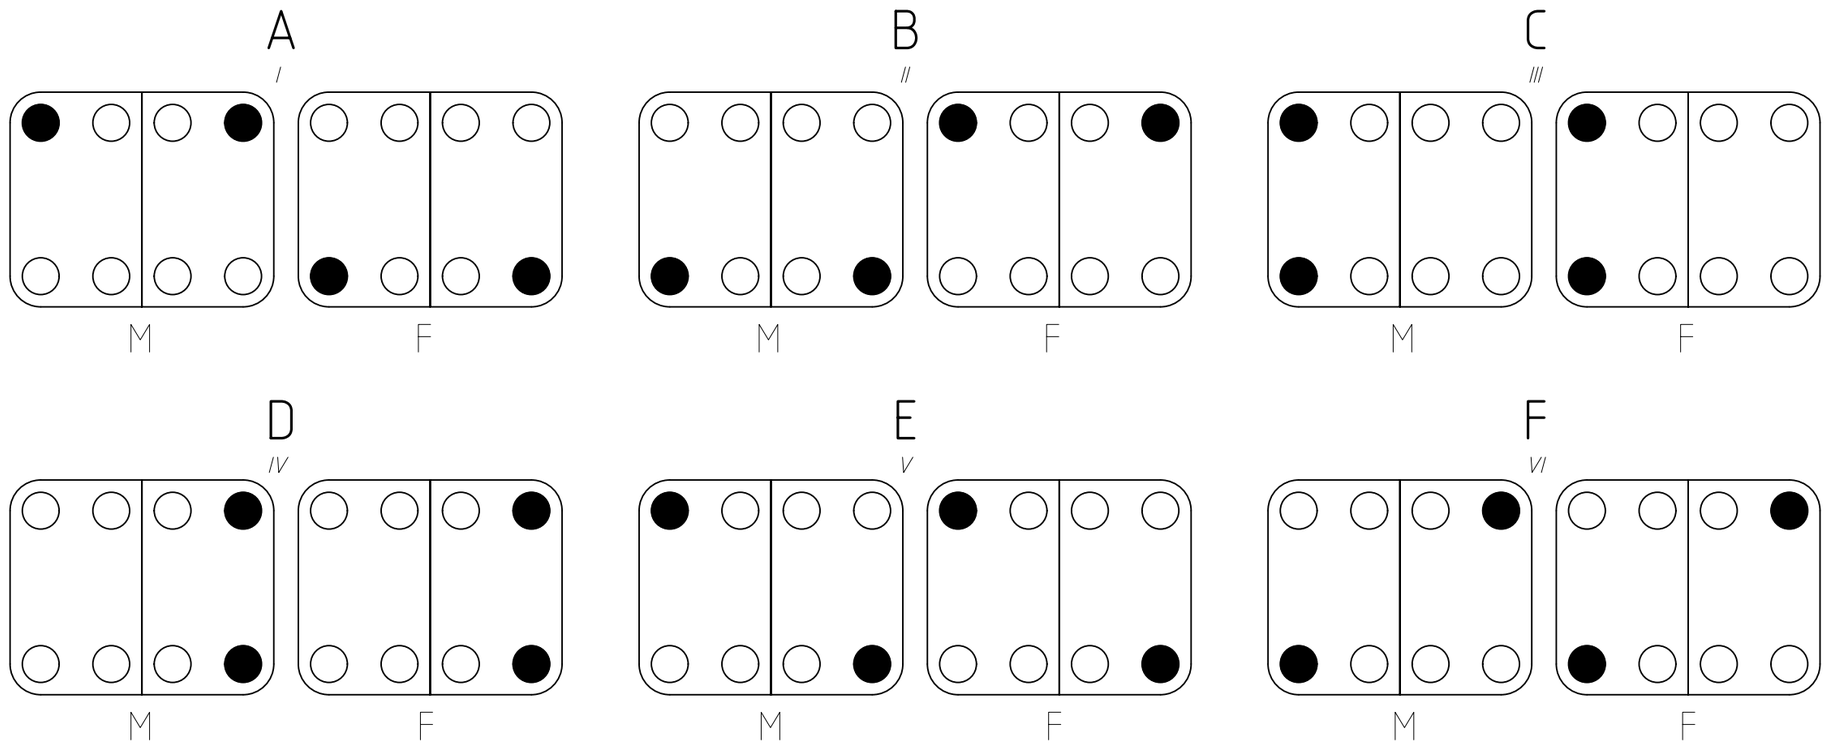

Legende / *explanation* :

- ● Kodierstift / *coding pin*
- ○ Befestigungsschraube / *locking screw*
- M Stifteinsatz / *male insert*
- F Buchseneinsatz / *female insert*

Gewicht (errechnet) / *Calc WT* : 0,03 kg		Zul. Abw./ *Tolerances* : ISO 2768-m	DIN / ISO 13715
Prüfmaß / *Testdimension*			
Teileindex *Partindexnumber*			
		Datum/ *Date*	Name
		Gez. / *Drawn* 16.06.2016	PWÖLF
		Status: Released	
		Inspector: 21.06.2016 MGRIM	
01	201600001	16.06.2016	PWÖLF
Index	Änderung/ *Description*	Datum/ *Date*	Name

Amphenol-Tuchel Electronics GmbH

2.189.273

Maßstab / *Scale* : 2:1 | A3

CUSTOMER DRAWING

Kodierbolzen mit Federring

coding pin with spring ring

M VN17 050 0004 XXX

Blatt/ *Sheet* 2 | 2 Bl.

Ers. f. / *Replacement for* :

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten

Downloaded from Arrow.com.