

8 Series

Toggle Switches

■ Introduction

The 8 Series Toggles is our high-reliability miniature switch product offering. This product line meets and exceeds all basic international switch standards.

With 8 toggle options, PC and solder lug terminals, power and logic level current ratings, 1-4 pole and many circuit offerings these switches can be used in many industries and various applications within these industries.

Four of the 8 Series lines are washable. Specifically designed for PC applications with automated solder and cleaning methods.

■ Applications

- Communication equipment
- Computer peripheral equipment
- Measuring instruments
- Medical equipment
- Automotive diagnosis

The switches can be used in a wide range of fields from industrial to consumer equipment.

■ Features of 8 Series Toggles

1. Terminal style :

Solder, Straight, Right angle and vertical mount PC terminals.

2. Contacts :

Silver or gold.

3. Epoxy resin case :

UL94V-0 self-extinguishing epoxy.

4. Actuator styles :

Over 30 actuator variations.

5. Insulation between terminal and ground :

4 mm minimum.































6. Prevention of flux entry

The epoxy resin seal on bottom of the switch helps prevent the entry of solder and flux.

7. Insulation barrier :





Insulation barrier design between poles helps prevent short-circuiting between poles ensuring high reliability.

8 Series Toggles Selection Table

Part No.	Name	Actuator shape	Number of poles	Switching function	Terminals	Page
8A	Standard toggle		1•2•3•4	ON - ON - ON ON - OFF - ON ※1/2 Poles ON - ON - ON ON - OFF - ON ※3/4 Poles ON - ON - ON ※8A Type 4 Poles only	  Solder Lug Straight PC	341 } 343
8B	Mustang Toggle		1•2•3•4		  Solder Lug Straight PC	344 } 345
8C	Flatted Toggle		1•2•3		  Solder Lug Straight PC	346 } 347
8E	Lever Lock Toggle		1•2•3•4		  Solder Lug Straight PC	348 } 349
8F	Splash Proof Toggle		1•2•4		  Solder Lug Straight PC	350 } 351
8J	Short Toggle		1•2•3•4		  Solder Lug Straight PC	352 } 353
Board mounting washable	8G	Short Toggle Washable	1•2	ON - ON - ON ON - OFF - ON (ON) - OFF - (ON) ON - - (ON)	   Straight PC Right Angle Vertical	354 } 355
	8GA	Standard Toggle Washable	1•2		   Straight PC Right Angle Vertical	356
Board mounting	8K	Short Toggle	1•2	ON - ON - ON	   Straight PC Right Angle Vertical	357 } 358
	8KA	Standard Toggle	1•2		   Straight PC Right Angle Vertical	359

() indicates momentary actuation

■ Terminals

Solder Lug (Style:1)	PC Straight (Style:2)	Right Angle (Style:4)	Vertical Mounting (Style:6)
t=0.8 	t=0.8 PC 	t=0.8 R/A 	t=0.8 w=1.2 V/M 

8 Series Toggles

Part Numbering

8	A	1	01	1	C - Z					
Series code	Actuator shape	Number of poles	Switching function	Terminals	Contact material and plating					
Code	Type	Fig.	Number of poles	Code	Switching function	Fig.	Terminals	Code	Contact material	Plating
A	Standard Toggle	1	1 pole	01	ON — ON	1	Solder Lug	None	Bs+Ag or Cu+Ag	Ag
B	Mustang Toggle	2	2 poles	02	ON — OFF — ON	2	PC Straight	C	Bs+Ag or Cu+Ag	Ni+Au
C	Flatted Toggle	3	3 poles	04	(ON) — OFF — (ON)	4	Right Angle	(※1) Bs=Brass Cu=Copper Ag=Silver Ni=Nickel Au=Gold (※1): Switches with gold-plated contacts ("C") are made-to order products. MOQ is 25 pcs.		
E	Lever-lock Toggle	4	4 poles	06	ON — (ON)	6	Vertical Mounting			
F	Splash Proof Toggle			※10	ON — ON — ON					
J	Short Toggle			※ 8A Type only.						
G	Board mounting washable									
K	Board mounting									

Note : Some combinations may not be available. Please check the "Table of Part Numbers" for each series.

8 Series Toggles Common Specifications

Contact specs.		Silver	Gold
Rating	Max.	AC125 V 6 A AC250 V 3 A DC30 V 4 A	AC125 V 6 A AC250 V 3 A DC30 V 4 A DC20V 25mA
Initial contact resistance		10 mΩ Max. (DC2~4 V 1 A)	20 mΩ Max. (AC200 μV 1.5 mA)
Initial dielectric strength		AC1500 V / 1 minute	
Initial insulation resistance		1000 MΩ Min. (DC500 V)	
Electrical life	Alternate type	50,000/cycles	
	Momentary type	25,000/cycles	
Operating temperature range		-30~+85°C	
Storage temperature range		-40~+85°C	

8A

Standard Bat Toggle Switches



RoHS Compliant

■ Features

The 8A series has a 10.5mm bat toggle.

■ Table of Part Numbers

Terminal Style	Number of poles		1 pole	2 poles	3 poles	4 poles
	Switching Function					
Solder Lug	ON	- ON	☆ 8A1011-Z ☆ 8A1011C-Z	☆ 8A2011-Z ☆ 8A2011C-Z	☆ 8A3011-Z	☆ 8A4011-Z
	ON	- OFF - ON	8A1021-Z	☆ 8A2021-Z	—	—
	ON	- ON - ON	—	—	—	★ 8A4101-Z
PC Straight	ON	- ON	☆ 8A1012-Z ☆ 8A1012C-Z	8A2012-Z	8A3012-Z	—
	ON	- OFF - ON	☆ 8A1022-Z ☆ 8A1022C-Z	☆ 8A2022-Z	—	—

■ Optional Accessories Page 361.

Color Cap					
Dimensions	Color	Part. No.	Dimensions	Color	Part. No.
	White	140000470030		White	140000470038
	Red	140000470098		Red	140000470100
	Black	140000470031		Gray	140000470077
	Gray	140000470037			

■ PC Hole Layouts Page 360.


■ Panel Cut-Out Dimensions Page 360.

■ Terminal Styles Page 339.

■ Standard accessories Page 360.

■ Soldering, Flux Cleaning and Packing Spec. Page 359.

SPDT

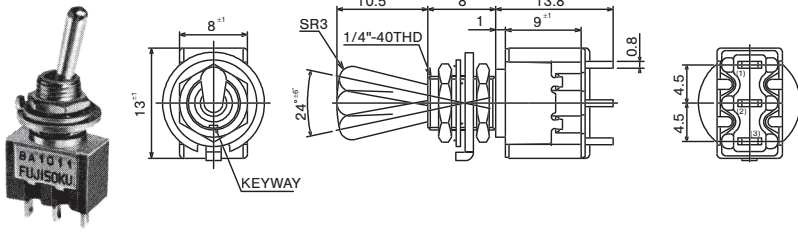


Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8A101■-Z	ON	-	ON
8A102■-Z	ON	OFF	ON
Connecting terminals	2-3	-	2-1

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

DPDT

Dimensions	A	B
Part No.		
8A2011~2022	9±1	13.8±1

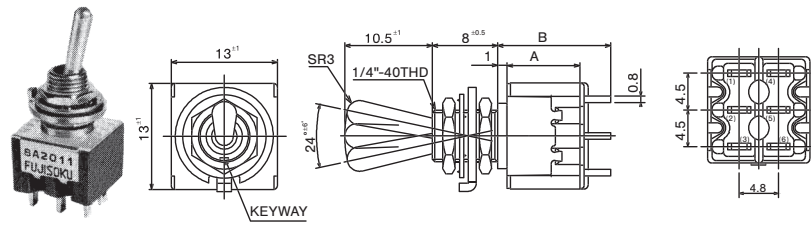


Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8A201■-Z	ON	-	ON
8A202■-Z	ON	OFF	ON
Connecting terminals	2-3 5-6	-	2-1 5-4

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

3PDT

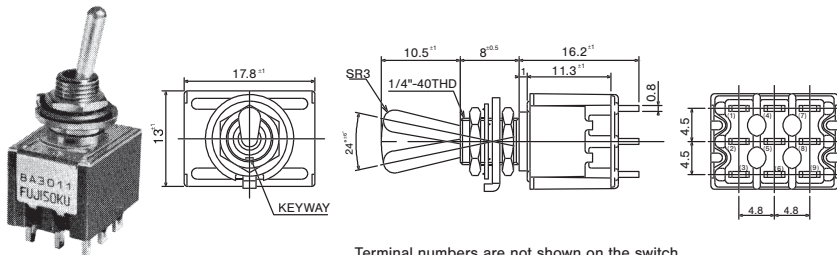


Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8A301■-Z	ON	-	ON
Connecting terminals	2-3 5-6 8-9	-	2-1 5-4 8-7

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

4PDT

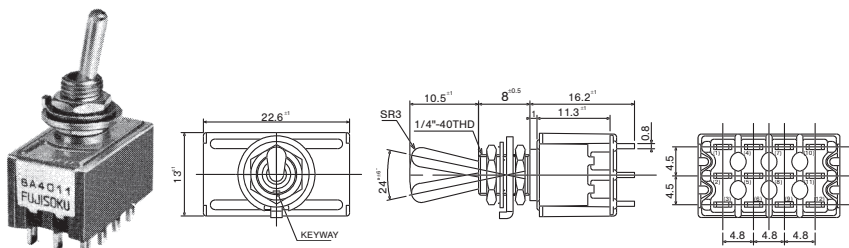

Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8A401■-Z	ON	-	ON
Connecting terminals	2-3 5-6 8-9 11-12	-	2-1 5-4 8-7 11-10
8A410■-Z	ON	ON	ON
Connecting terminals	2-3 5-6 8-9 11-12	2-3 5-4 8-9 11-10	2-1 5-4 8-7 11-10

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.







Three ON Switches


These switches are designed so that the Switching Function will be ON in all three positions. Extra wiring is required by the customer to get the three ON options. Please see below.

8A4101-Z

■ 2 Circuit 3 Contacts

● Function

Actuator position			
Circuit diagram			
Switching function	ON	ON	ON
Connecting terms.	2-6 8-12	2-4 8-10	2-1 8-7

 External wiring (to be wired by the customer)

■ Precautions (8A•8B•8C•8E•8F•8J)

1. Soldering Specifications

(1) Manual soldering

Device : Solder iron

① 420°C Max. 3 sec. Max.

(2) Auto soldering

② 275°C Max. 6 sec. Max.

The above-stated soldering conditions shall apply only to switches with straight terminals. Auto soldering is not possible with right-angle terminals. Switches with right-angle terminals should be soldered manually according to the conditions specified in (1) above.

(3) When soldering two or more terminals to the common land, use the solder resist to isolate the terminals.

3. Mounting

● Do not bend the terminals before mounting the switch on the PC board.

● After mounting the switch, do not place the device in such a way that the device weight will be applied on to the actuator of the switch.

● For switches with straight terminals, solder the switch on the PC board after fixing the switch on the panel with a nut.


2. Flux Cleaning

(1) Solvent : Fluorine or Alcohol type.

(2) 8A/B/C/E/F/J series are not washable. To wash the PC board, clean the soldering surface of the PC board with a brush so that the switch is not exposed to the cleaning solution.

(3) Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.

■ Packaging Specification

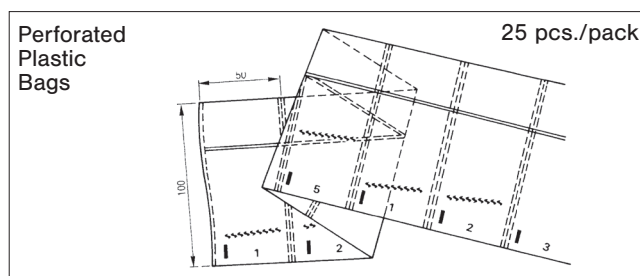

8 Series Toggles

Panel Cut-Out Dimensions

Series	8A-8J	8C	8E	8A-8J	8C	8E	8F
Panel thickness	2.5 mm Max.	2.4 mm Max.	1.5 mm Max.	3.5 mm Max.	3.4 mm Max.	2.5 mm Max.	5 mm Max.
Dimensions							
Series	8B						
Panel thickness	5.9 mm Max.			6.9 mm Max.			
Dimensions							

PC Hole Layouts

Series	8A • 8B • 8C • 8E • 8F • 8J
Dimensions	

Standard Accessories

Part Name	Dress Nut	Hex Nut	Lockwasher	Locking Ring	O-Ring	Hex Nut	Lockwasher	Locking Ring
Part No.	140008010253	140008010241	140008030051	140008020062	14000610076	140008010243	140008030055	140008020065
Dimensions								
Finish	Nickel plated		Zinc plated		Nitrile rubber (Black)	Nickel plated	Zinc plated	
8A		2	1	1				
8B						2	1	1
8C	1	1	1	1				
8D		2	1	1				
8E		2	1	1				
8F		1	1		1			
8J		2	1	1				

● Numbers in the above chart show the quantities of each accessories enclosed with the switch.

Optional Accessories

«Sold separately»

Type	8A · 8F · 8GA · 8KA	8A · 8F · 8GA · 8KA	8B	8E
Part Name	Color Cap			
Dimensions	<p style="text-align: center;">Gloss finish Vinyl chloride resin</p>	<p style="text-align: center;">Gloss finish Vinyl chloride resin</p>	<p style="text-align: center;">Gloss finish Vinyl chloride resin</p>	<p style="text-align: center;">Alumite finish Aluminum alloy</p>
Silver	-	-	-	140000470058
White	140000470030	140000470038	140000470063	-
Red	140000470098	140000470100	140000470108	140000470060
Black	140000470031	-	140000470064	140000470059
Gray	140000470037	140000470077	-	-

Type	8A
Part Name	Waterproof boot
Part No.	140000470422
Dimensions	<p style="text-align: center;">With Nut (1/4" - 40TPI)</p>

: Optional Accessories.