

## EN2 SERIES SEALED CONNECTORS

### NEW PRODUCT BULLETIN 601

#### FEATURES & BENEFITS

- Sealed to IP68, NEMA 250 (6P) (when mated)
- Available in standard or winged coupling ring
- Grommet and o-ring free design
- Solder/crimp and PC contact options



#### APPLICATIONS

- Any sealed data transmission
- Military or industrial GPS location devices
- Instrumentation
- Medical data carts
- Marine Applications
- Transportation
- General industrial electronic applications

**SWITCHCRAFT®**

A HEICO COMPANY



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.

# EN2 SERIES SEALED CONNECTORS

## NEW PRODUCT BULLETIN 601

### SPECIFICATIONS

#### MECHANICAL SPECIFICATIONS

Life: 600 insertion/withdrawal cycles minimum  
Vibration: Mil-Std 202G Method 201A  
Hex Nut Torque: 5-6 in/lb  
Operating Forces: 8 lb maximum insertion. 0.25 lb minimum withdrawal  
Back Shell Type: Threaded Handle

#### ELECTRICAL SPECIFICATIONS

Voltage Rating: 250 V AC/DC for 2 contact arrangement. 125 V AC/DC for 3-7 contact arrangements  
Current Rating: Refer to current rating table on page 3  
Insulation Resistance: 1000 MΩ minimum  
Contact Resistance: 10 mΩ maximum

#### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Limits: -40°C to +85°C (-40°F to +185°F)  
Moisture Resistance: Mil-Std 202G Method 106G  
Insulation Resistance: Mil-Std 202G Method 302 Condition B  
Thermal Shock: Mil-Std 202G Method 107G  
Salt Atmosphere (Corrosion): Mil-Std 202G Method 101E Condition B  
Weathertight Ratings: IP16, IP18, IP66, IP67, IP68 per IEC60529. NEMA 250 (6P), CFR 46 Part 110.20

#### MATERIAL SPECIFICATIONS

Connector Housing: Thermoplastic, Black  
Hex Nut: Thermoplastic, Black  
Coupling Ring: Thermoplastic, Black  
Cable Clamp: Thermoplastic, Black  
Handle (Back-Shell): Thermoplastic, Black  
Insulator: Elastomer, Black  
Seal Grommet: Elastomer, Black  
Contacts: Copper Alloy, Plated

### ORDERING CODE

EN2									
Connector Type: C - Cord P - Panel									Packaging Options: Leave blank for Bulk K - Kit (one unit/bag)
# of Contacts: 2-3 for #20 4 for #22 5-7 for #26									Coupling Ring Options (Cord Only): Leave blank for Ribbed W - Winged
Gender: M - Male F - Female									Grommet Code - Cable O.D. Range: (Cord Only) DC - Daisy Chain (all 3 sizes) G1 - 0.100-0.140 (2.5-3.6) G2 - 0.140-0.180 (3.6-4.6) G3 - 0.180-0.220 (4.6-5.6)
Contact Size: 20 - #20 22 - #22 26 - #26									Contact Style: Leave blank for Solder or Crimp P - PC tail (Panel connectors only)

Consult factory for Cable to Cable (Inline) type connectors.



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.

# EN2 SERIES SEALED CONNECTORS

## NEW PRODUCT BULLETIN 601

### EN2 SERIES CURRENT RATING TABLE

Contacts	Wire (awg)	Current Rating (A) at Operating Temperature (°C)				
		45°C max	55°C max	65°C max	75°C max	85°C max
2 #20	20	7	6	5	4	3.5
	22	5.5	5	4	3	2.5
	24	5.5	5	4	3	2.5
	26	4	3.5	2.5	2	1
3 #20	20	6.5	5.5	4.5	3.5	2
	22	5	4.5	3.5	3	1.5
	24	5	4.5	3.5	3	1.5
	26	3	2.5	2	1.5	0.5
4 #22	20	5	4.5	3.5	3	1.5
	22	4.5	4	3	2	1
	24	4.5	4	3	2	1
	26	3	2.5	2	1.5	0.5
5-7 #26	26	3	2.5	2	1.5	1
	28	2.5	2	1.5	1	0.5
	30	2	1.5	1	0.5	0.5

### EN2 CONTACT CRIMPING TOOLS

Handle	Description	Positioner	Contact Sizes	Wire Sizes
EN3CR	Crimp Hand Tool	EN2POS20	#20, #22	20, 22 AWG
		EN3POS26	#26	26, 28, 30 AWG
EN3CRAUTO	Pneumatic Crimp Tool	EN2POS20	#20, #22	20, 22 AWG
		EN3POS26	#26	26, 28, 30 AWG

### EN2 INSERTION / EXTRACTION TOOLS

Part Number	Contact Sizes	Description
EN3INS20	#20, #22	Insertion / Extraction Tool for 20, 22 AWG
EN3INS26	#26	Insertion / Extraction Tool for 26, 28 & 30 AWG

### EN2 ALTERNATE LARGER FRAME TOOL

Handle	Description	Positioner	Contact Sizes	Wire Sizes
EN2CRL	Hand Tool	EN2POS20L	#20, #22	20-22-24-26 AWG
EN2CRAUTOL	Pneumatic Tool			






Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.

# EN2 SERIES SEALED CONNECTORS

## NEW PRODUCT BULLETIN 601


### CORD

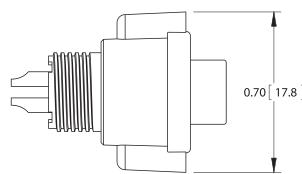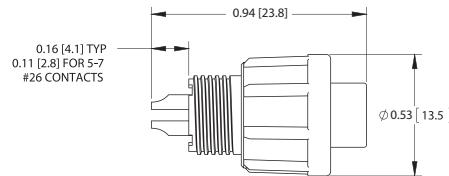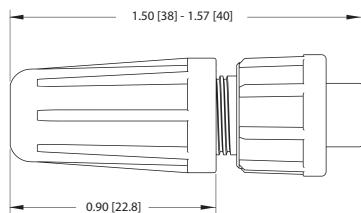


TYPICAL CORD CONNECTOR  
WITH RIBBED COUPLING RING

TYPICAL CORD CONNECTOR  
WITH WINGED COUPLING RING


ALL DIMENSIONS FOR REFERENCE ONLY

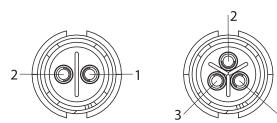


3-#20

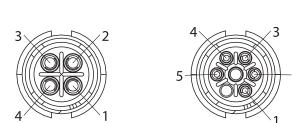


4-#22



5-#26







6-#26



7-#26


CONTACT ARRANGEMENTS  
CORD CONNECTOR REAR (WIRING SIDE) VIEW

### PANEL MOUNT

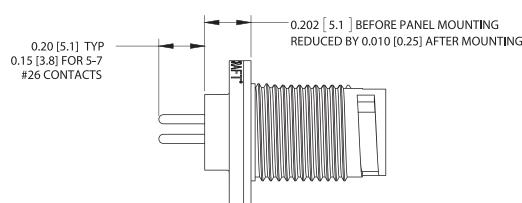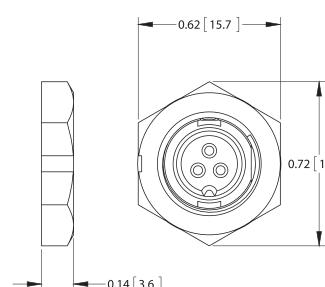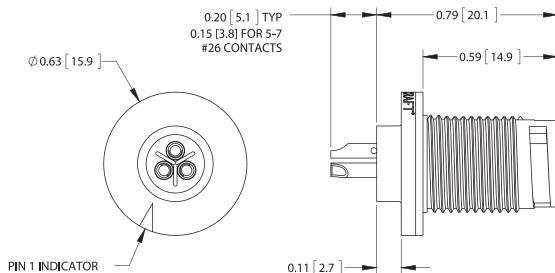


PC TAIL TYPE CONTACTS


ALL DIMENSIONS FOR REFERENCE ONLY

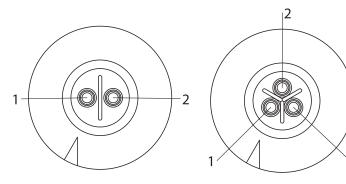


3-#20




4-#22



5-#26

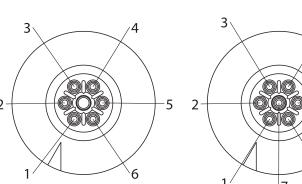

6-#26



7-#26

CONTACT ARRANGEMENTS  
PANEL CONNECTOR REAR (WIRING SIDE) VIEW

### DUST CAP PART # 16295



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.


# EN2 SERIES SEALED CONNECTORS

## NEW PRODUCT BULLETIN 601

### EN2 CORD CONNECTOR FIELD ASSEMBLY INSTRUCTIONS


Feed the free end of cable through the handle, cable-clamp/grommet, and coupling ring in the order shown.

Strip cable end and conductors as shown.

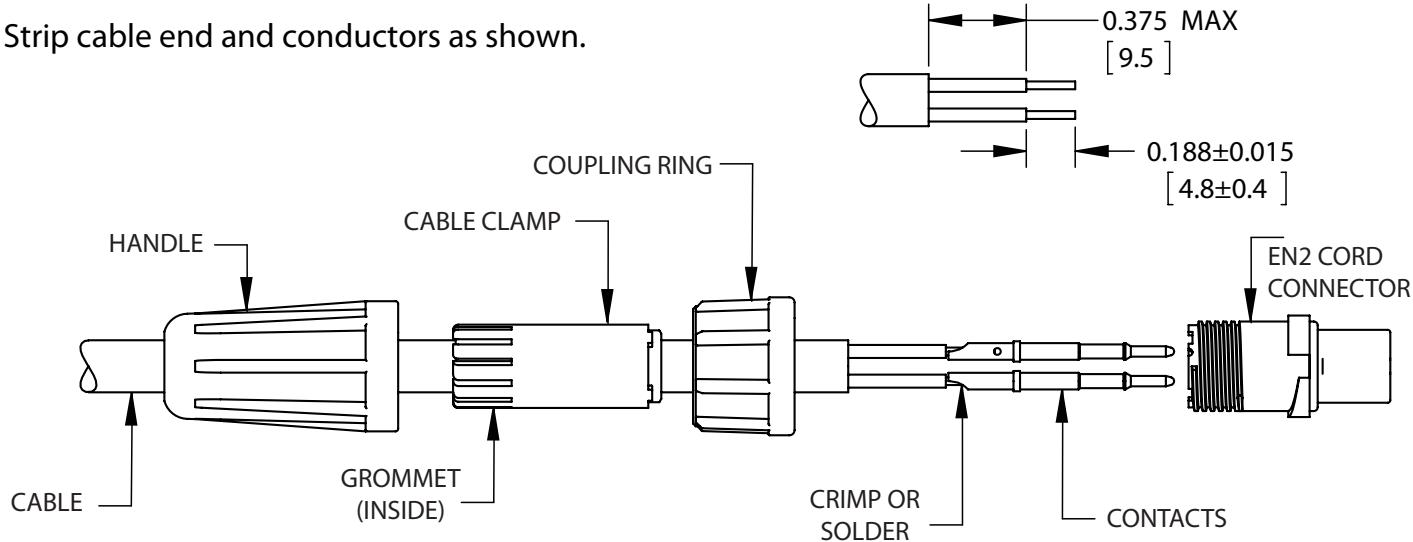


Soldering or crimping conductors to contacts is recommended before insertion into connector. If crimping, use hand or pneumatic crimp tool with crimp positioner per contact size. If soldering after contacts are inserted in the connector, limit exposure of contacts to soldering iron temperature to 4 sec. maximum. Soldering iron temperature should not exceed 650°F (343°C).

Insert wired contacts into connector housing using an insertion tool and per contacts arrangements.

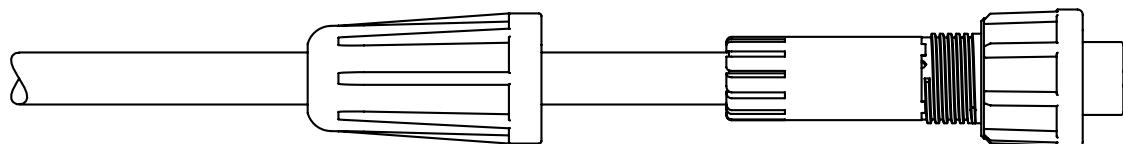

Align coupling ring over housing and bring forward.

Align cable-clamp/grommet on the rear of housing. Make certain grommet is completely inside the cable-clamp in the final position.

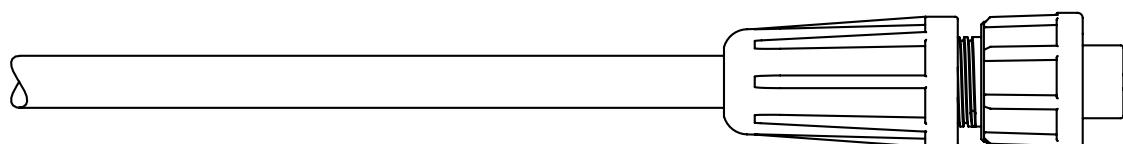

Bring forward and thread handle onto housing until tight. Do not exceed 2 in-lb torque.




Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.

# EN2 SERIES SEALED CONNECTORS


## NEW PRODUCT BULLETIN 601

### EN2 PANEL CONNECTOR FIELD ASSEMBLY INSTRUCTIONS

Strip cable end and conductors as shown.

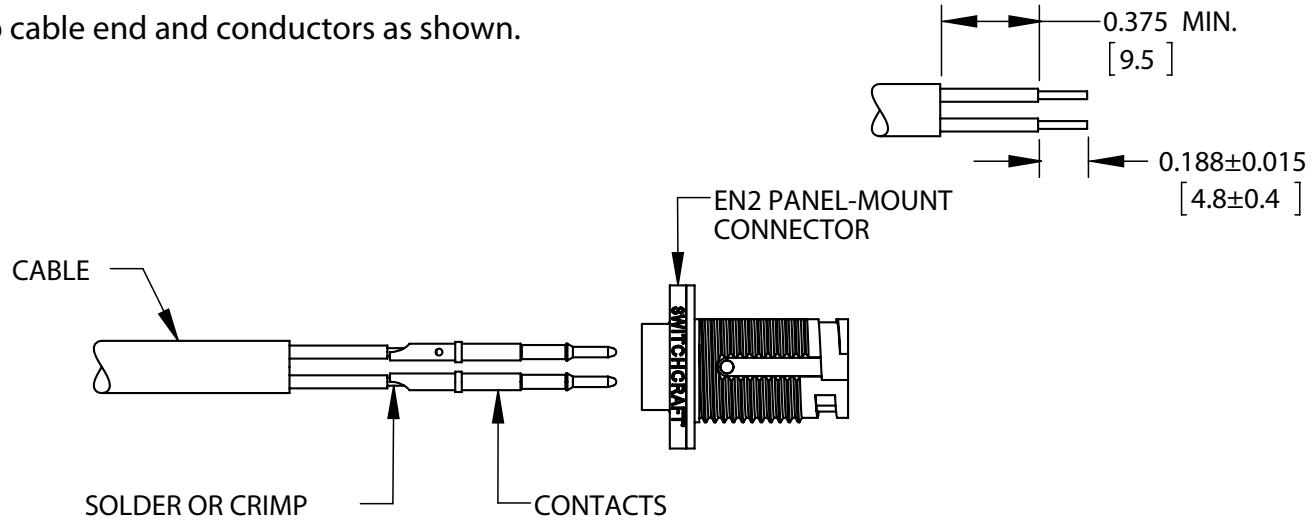

Soldering or crimping conductors to contacts is recommended before insertion into connector. If crimping, use hand or pneumatic crimp tool with crimp positioner per contact size. If soldering after contacts are inserted in the connector, limit exposure of contacts to soldering iron temperature to 4 sec. maximum. Soldering iron temperature should not exceed 650°F (343°C).

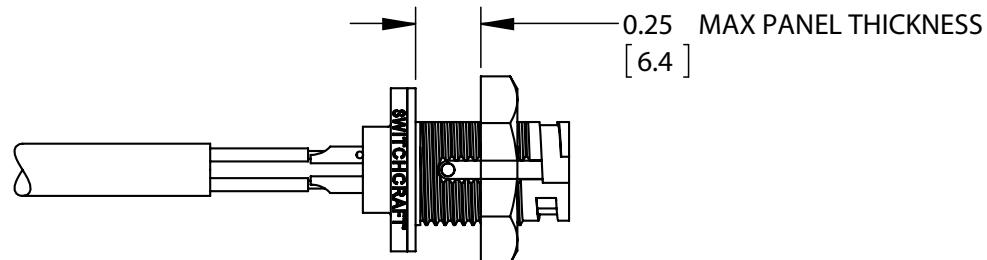

Insert wired contacts into connector housing using an insertion tool and per contacts arrangements.

Align and install connector into panel cut-out. Tighten hex nut 5 -6 in-lb.



Please visit [www.switchcraft.com](http://www.switchcraft.com) for the most up-to-date product specifications. Made in USA.