




Triad Magnetics
 460 Harley Knox Blvd
 Perris, CA 92571
 Tel: 951.277.0757
 Fax: 951.277.2757
 Email: info@triadmagnetics.com
 Website: www.triadmagnetics.com

Item # FS12-090-C2, PC Mount Split Pack™ Class 2/3 Power Transformers

The Triad Split Pack™ split bobbin transformer is an extremely versatile tool for PC board applications. Split Pack™ transformers are nonconcentrically wound - with primaries and secondaries side-by-side. Unlike the secondary-on-top-of-primary designs of standard PC board transformers, the split bobbin winding and low capacitive coupling eliminate costly electrostatic shielding. It is offered in a dual secondary configuration with either single or dual primaries.

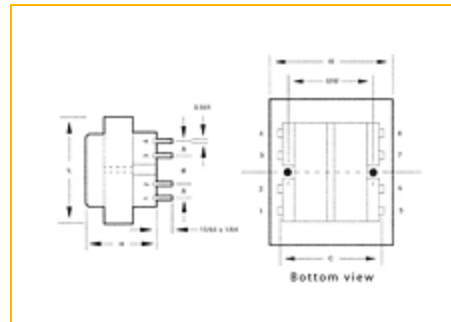

[Check Stock](#) | [Specifications](#) | [Technical Notes](#) | [Note](#) | [SnapMagic](#)

Check Stock

Click here to check stock >>

CHECK STOCK ✓

Specifications

Number of Pins	8
Electrical Rating	1.1 V·A

Secondary Voltage in Series	12.6 V CT at 0.09 A
Transformer Contact Type	Center Tap
Secondary Voltage in Parallel	6.3 V at 0.18 A
Height (H)	1.130 in
Width (W)	1.142 in
Length (L)	1.417 in
Dimension (A)	0.265 in
Dimension (B)	0.265 in
Dimension (C)	1.200 in
Dimension (D)	0.041 in
Dimension (E)	0.020 in
Dimension (F)	0.236 in
Primary Voltage	115 V 230 V
Primary Frequency	50 Hz 60 Hz
Type	Dual Primary
Weight	0.17 lb

Technical Notes

1. Hi-pot tested at 4,250 VRMS.
2. PC terminal pin spacing for accurate placement.
3. 115 V connect primary in parallel.
230 V connect primary in series.

4. Series Connections:

Primary - Input 1 & 4

Connect 2 & 3

Secondary - Input 5 & 8

Connect 6 & 7

5. Parallel Connections:

Primary - Input 1 & 2

Connect 1 & 3, 2 & 4

Secondary - Input 5 & 8

Connect 5 & 7, 6 & 8

6. For single primary, omit pins 2 and 3.

7. 1.1 & 2.5 VA are not offered with mounting holes.

Note

TUV Approved