





Part Number: 2743001112

43 BEAD ON LEAD

### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 2 = Taped and Reeled

# Ferrite suppression beads are supplied assembled on tinned copper wire for automated circuit board assembly.

- Wires are oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating. The resistance of the wire is 3.5 mOhm for the 22 AWG and 2.2 mOhm for the 20 AWG wire.

# Recommended Soldering Profile

#### <u>Packaging Options:</u>

- Beads-on-leads can be supplied bulk packed. The last digit of bulk packed parts is a "1". Parts with a "2" as the last digit of the part number are supplied taped and reeled per IEC 60286-1 and EIA RS-296-F standards. Taped and reeled parts are supplied 4500 pieces on a 14″ reel. Taping details: Component pitch 5 mm. Inside tape spacing 52.5 mm. Tape width 6 mm.
- Our "Bead-on-Lead Suppression Kit" (part number 0199000028) is available for prototype evaluation.


For any bead-on lead requirement not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing
3D Model

Weight: 0.4 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	3.5	±0.25	0.138	1
В	62	±1.50	2.44	1
С	4.45	±0.25	0.176	_
D	0.65	_	0	22 AWG

Reel Information						
Tape Width mm			Parts 13" Reel	Parts 14" Reel		
6	5	_	_	4500		



# **Chart Legend**

+ Test frequency


Typical Impedance $(\Omega)$		
10 MHz	35	
25 MHz <sup>+</sup>	50	
100 MHz <sup>+</sup>	70	
250 MHz	79	


Beads-on-leads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

# **Catalog Drawing**

The impedance of the 73 & 43® beads-on-leads are measure on the E4990A Impedance Analyzer. The 61 beads-on-leads are tested for impedance on the E4991A / HP4291B Impedance Analyzer.

Typical Impendance $(Ω)$		
10 MHz	31	
25 MHz <sup>+</sup>	49	
100 MHz <sup>+</sup>	68	
250 MHz	65	

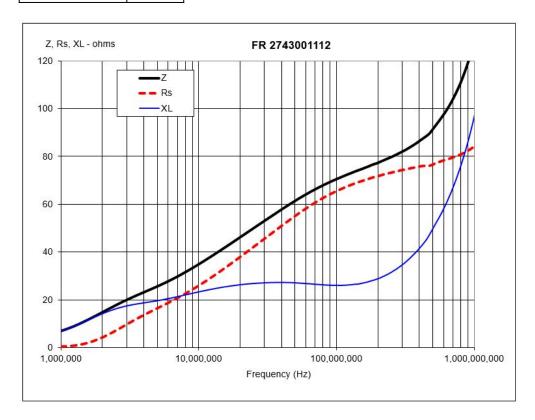

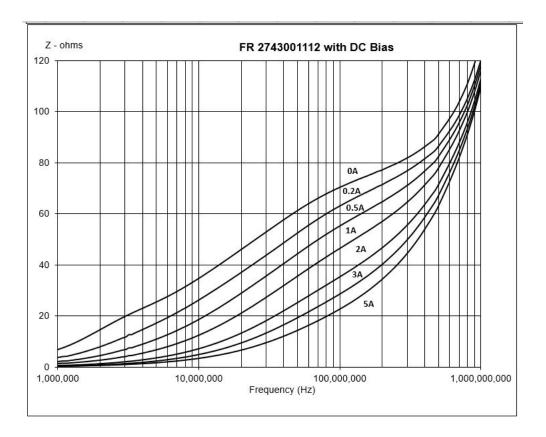

## **CSV** Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com