



50 to 300 Watts; 1 to 3 outputs

Features

- Inputs: 28 Vdc and 270 Vdc
- Transient protection: 28 Vdc designed to meet MIL-STD-704A-F, MIL-STD-1275A/B/D and DO-160E
- One, two, or three outputs
- Outputs from 2 to 48 Vdc
- Up to 5 W/in³
- High efficiency
- Remote sense
- ZCS power architecture
- Low noise FM control
- MIL-STD-461C/D/E EMI compliance

Product Highlights

The MI-ComPAC is a complete single, dual, or triple output DC-DC power supply that delivers up to 300 W from inputs of 28 Vdc or 270 Vdc.

The MI-ComPAC meets the conducted emissions and conducted susceptibility specifications of MIL-STD-461C/D/E and designed to meet the input transient, surge, and spike protection to the most severe levels of MIL-STD-1275, MIL-STD-704 and DO-160E.













Over/undervoltage lockout provides an additional safeguard against potentially damaging line conditions. The MI-ComPAC also features a master disable.

Packaging Options

Conduction Cooled Models Available
Add "-CC" to the end of the part number.
(Consult factory for details.)

Extended heat sink available add "-H1" to end of part number.

MI-ComPAC Configuration Chart

Configuration	Output Power	# of Modules	Dimensions
Single Output			
MI-LC  - 	50 – 100 W	1	8.6" x 2.5" x 0.99" (218,4 x 63,5 x 25,2 mm)
MI-MC  - 	150 – 200 W	2	8.6" x 4.9" x 0.99" (218,4 x 124,5 x 25,2 mm)
MI-NC  - 	300 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)
Dual Output			
MI-PC  - 	100 – 200 W	2	8.6" x 4.9" x 0.99" (218,4 x 124,5 x 25,2 mm)
MI-QC  - 	200 – 300 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)
Triple Output			
MI-RC  - 	150 – 300 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)

• Input Voltage

Nominal	Range	Brownout ^[a]	Transient ^[b]
2 = 28 V	18 – 50 V	16	60
6 = 270 V	125 – 400 V	n/a	475

^[a] Brownout voltage for output power derated to 75% of maximum

^[b] Transient voltage for one second

•• Output Voltage

Z = 2 V ^[c]	T = 6.5 V ^[d]	N = 18.5 V
Y = 3.3 V ^[c]	R = 7.5 V ^[d]	3 = 24 V
0 = 5 V ^[c]	M = 10 V	L = 28 V
X = 5.2 V	1 = 12 V	J = 36 V
W = 5.5 V	P = 13.8 V	K = 40 V
V = 5.8 V	2 = 15 V	4 = 48 V

^[c] These units rated for 75% load from 125 V – 150 V: "V" power for "Z & Y" voltages, "W" power for "0" voltages

^[d] 75 W maximum module power for 28 V input voltage

••• Product Grade Temps. °C

Grade	Operating	Storage
I =	-40 to +85	-55 to +100
M =	-55 to +85	-65 to +100
Temperatures apply to product case.		

••• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
Y = 50 W	Y = 10 A
X = 75 W	X = 15 A
W = 100 W	W = 20 A
V = —	V = 30 A

••• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
V = 150 W	V = 30 A
U = 200 W	U = —
S = 300 W	S = 60 A

••• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
S = 300 W	S = —
P = —	P = 90 A

MI-COMPAC SPECIFICATIONS

(typical at $T_{BP} = 25^{\circ}\text{C}$, nominal line and 75% load, unless otherwise specified)

■ INPUT SPECIFICATIONS

Parameter	Min	Typ	Max	Unit	Notes
28 Vdc input modules					
Steady state input	18	28	50	Vdc	
Low line lockout			17.5	Vdc	Automatic recovery
Input spike limit	-250		+250	Vdc	70 μs , 15 mJ per MIL-STD-1275A/B/D
Input surge limit			100	Vdc	50 ms, 0.5 Ω per MIL-STD-1275A/B/D
			80	Vdc	100 ms per DO-160E, Section 16, Power Input, Category Z
Overvoltage shut down	50			Vdc	100 ms automatic recovery
Recommended fuse			10 ^[a]	Amps	F03A type
270 Vdc input modules					
Steady state input	125	270	400	Vdc	
Low line lockout			125	Vdc	Automatic recovery
Input spike limit			+800	Vdc	10 μs , 50 Ω
			+600	Vdc	100 μs , 15 mJ
Input surge limit	-600		500	Vdc	100 ms, 0.5 Ω
Overvoltage shut down	400			Vdc	100 μs automatic recovery
Recommended fuse			2 ^[a]	Amps	F03A type
All models					
No load power dissipation		1.5 ^[a]	2 ^[a]	Watts	
Master disable input current ^[b] (Absolute max., 20 mA)	4			mA	Sink; disables all outputs
Inrush current		110	125	%, I_{IN}	Steady state I_{IN} , 10 ms

^[a] Per internal module configuration

^[b] Multiply minimum x 2 for 2-ups and x 3 for 3-ups

■ OUTPUT SPECIFICATIONS

Parameter	Min	Typ	Max	Unit	Notes
Set point accuracy		0.5	1.0	% Vnom	
Load / line regulation		0.2	0.5	% Vnom	LL to HL, NL to 10%
		0.05	0.2	% Vnom	LL to HL, 10% to FL
Output temperature drift		0.01	0.02	%/ $^{\circ}\text{C}$	
Output noise – p-p		1.0	1.5	% Vnom	Whichever is greater; 20 MHz BW
		100	150	mV	
Output voltage trimming ^[c]	50		110	% Vnom	
Remote sense compensation	0.5			Vdc	
OVP set point	115	125	135	% Vnom	Latching
Current limit	105		125	% Inom	Auto restart
Short circuit current ^[d]	20		130	% Inom	

^[c] 10 V, 12 V, and 15 V outputs, standard trim range $\pm 10\%$. Consult factory for wider trim range

^[d] Output ranges of 5 V or less incorporate foldback current limiting, outputs of 10 V and above incorporate straight line current limiting

MI-COMPAC SPECIFICATIONS (CONT.)**■ THERMAL CHARACTERISTICS**

Parameter	Min	Typ	Max	Unit	Notes
Efficiency		81		%	
Operating temperature, case			+85	°C	See product grade
Storage temperature			+100	°C	See product grade
Shut down temperature	+90	+95	+105	°C	Cool and recycle power to restart

■ ISOLATION CHARACTERISTICS

Parameter	Min	Typ	Max	Unit	Notes
Input to output	4,242			Vrms	1 minute
Input to case					
28 Vdc input	2,121			Vrms	1 minute
270 Vdc input	2,500			Vrms	1 minute
Output to case	500			Vrms	1 minute

■ MECHANICAL SPECIFICATIONS

Parameter	Min	Typ	Max	Unit	Notes
Weight					
1 Up		1.2 (544)		lbs. (Grams)	
2 Up		2.4 (1088)		lbs. (Grams)	
3 Up		3.6 (1633)			

■ EMC CHARACTERISTICS; MIL-STD-461C/D/E

Parameter	Notes		
Input power leads			
Conducted emissions	CE01, CE03, CE07	MIL-STD-461C — 1-up	
	CE101, CE102	MIL-STD-461D — 1-up	
	CE101	MIL-STD-461E — 2-up & 3-up	
Conducted susceptibility	CS01, CS02, CS06	MIL-STD-461C — 1-up	
	CS101, CS114, CS116	MIL-STD-461D — 1-up	
	CS101, CS114, CS116	MIL-STD-461E — 2-up & 3-up	

■ THERMAL CONSIDERATIONS

Parameter	Standard Units			With Optional Heat Sink ^[a]		
	1-Up	2-Up	3-Up	1-Up	2-Up	3-Up
Thermal Impedance — Case-to-Air (°C/W)						
Free Air (Horizontal)	3.6	1.7	1.4	2.1	1.3	1.0
Forced convection through heat sink fins						
50 LFM	2.7	1.4	1.3	1.5	1.1	0.9
100 LFM	2.3	1.3	1.1	1.2	0.9	0.7
250 LFM	1.6	1.0	0.8	0.7	0.5	0.4
500 LFM	1.2	0.7	0.6	0.4	0.3	0.3
750 LFM	0.9	0.5	0.5	0.3	0.2	0.2
1000 LFM	0.8	0.4	0.4	0.2	0.2	0.2

- Thermal impedance, chassis-to-air, is provided for 1-up, 2-up and 3-up MI-CompPAC package configurations as a function of airflow.
- Case temperature = (total power dissipated x thermal impedance) + ambient temperature.
- Watts dissipated per output = (output power ÷ efficiency) – output power.

[a] To order optional heat sink add –H1 to part number

Disable Current

- 4 mA DC minimum for 1-up CompPAC
- 8 mA DC minimum for 2-up CompPAC
- 12 mA DC minimum for 3-up CompPAC

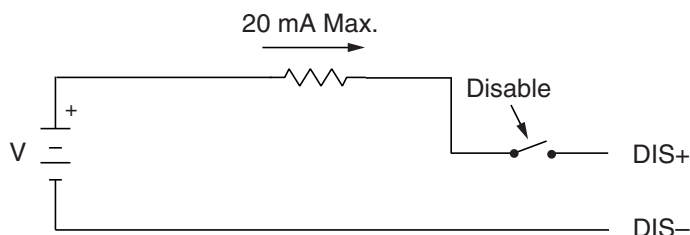


Figure 1 — Disable circuit; The MI-CompPAC incorporates an optically isolated master disable input which will shut down the MI-CompPAC when a current is driven through the disable terminals.



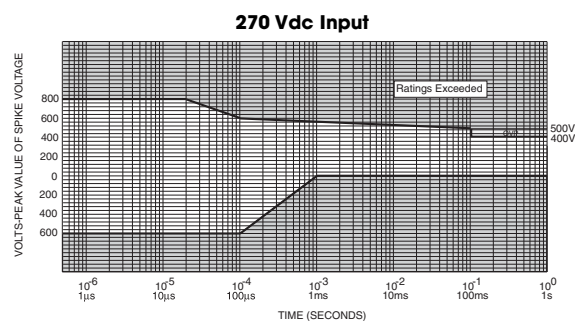


Figure 2 — Long term safe operating area curves; 1% duty cycle maximum, for short duration transient capability refer to specifications

MECHANICAL DRAWINGS

ALL MODELS


INPUTS	
1	Ground
2	-Input
3	+Input
4	Disable-
5	Disable+
OUTPUTS	
A	+Output
B	+Sense
C	Trim
D	-Sense
E	-Output

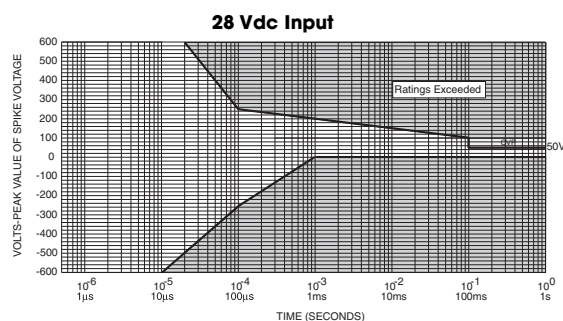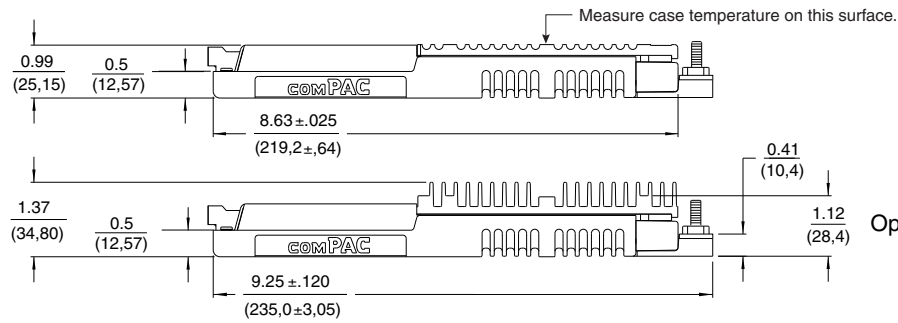


Standard Heat sink

Optional heat sink (H1)


LC SERIES

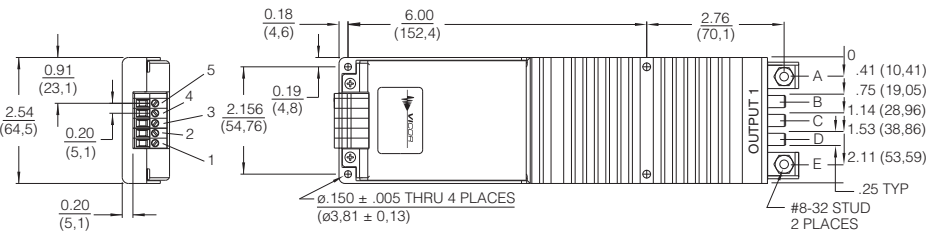

MC, PC SERIES

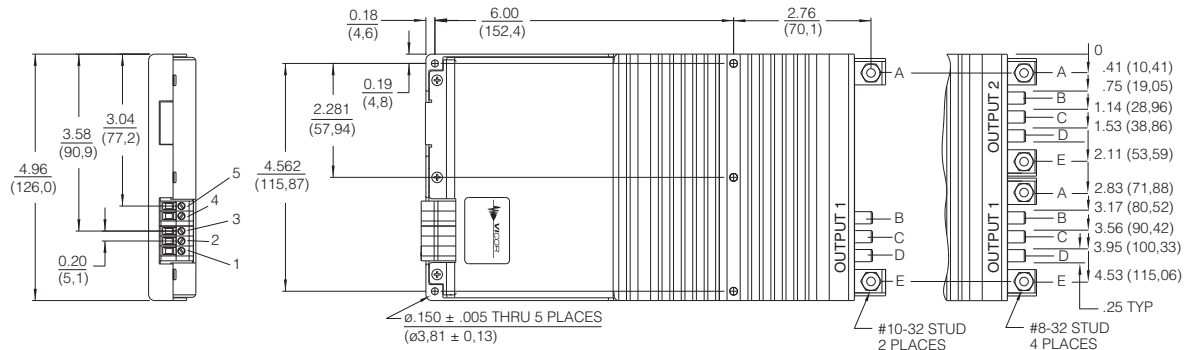

NC, QC, RC Series

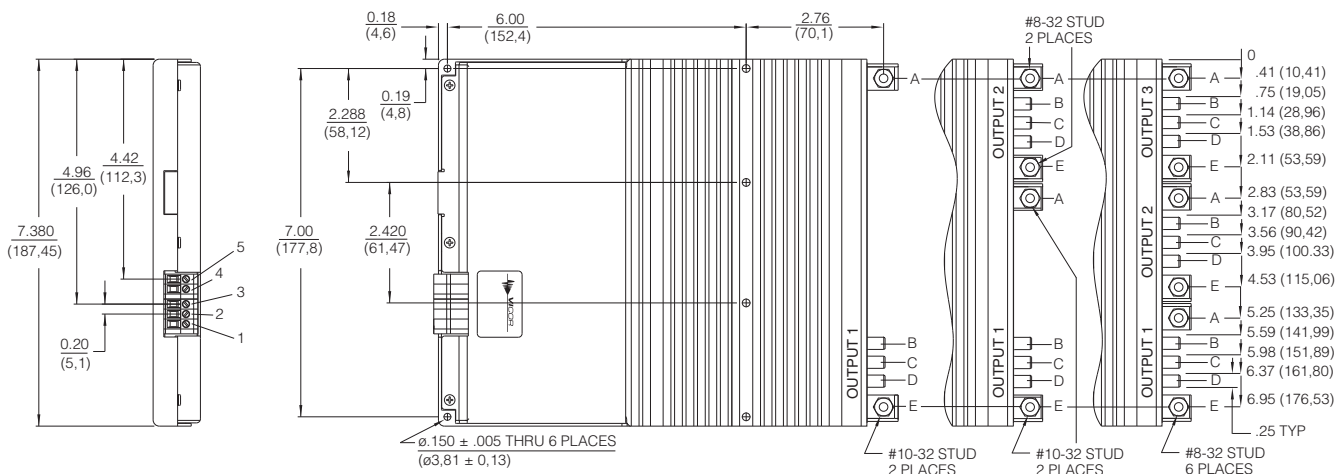

Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Specifications are subject to change without notice.

Vicor's Standard Terms and Conditions

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

Product Warranty

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

Life Support Policy

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

Intellectual Property Notice

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Vicor Corporation

25 Frontage Road
Andover, MA, USA 01810
Tel: 800-735-6200
Fax: 978-475-6715

email

Customer Service: custserv@vicorpower.com

Technical Support: apps@vicorpower.com