
Low Voltage Standard Rectifier

V_{RRM}	=	1200 V
I_{FAV}	=	60 A
V_F	=	1.1 V

Single Diode

Part number

DLA60I1200HA



Backside: cathode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very low forward voltage drop
- Improved thermal behaviour

Applications:

- Diode for main rectification
- For single and three phase bridge configurations

Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

OBSOLETE

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

© 2019 IXYS all rights reserved

Downloaded from Arrow.com.

Rectifier

Symbol	Definition	Conditions		Ratings min.	typ.	max.	Unit
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			1300	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			1200	V
I_R	*reverse current*	V_R = 1200 V	T_{VJ} = 25°C			30	µA
		V_R = 1200 V	T_{VJ} = 150°C			0.3	mA
V_F	*forward voltage drop*	I_F = 60 A	T_{VJ} = 25°C			1.19	V
		I_F = 120 A				1.42	V
		I_F = 60 A	T_{VJ} = 150°C			1.10	V
		I_F = 120 A				1.41	V
I_{FAV}	*average forward current*	T_C = 150°C	T_{VJ} = 175°C			60	A
		rectangular d = 0.5					
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 175°C			0.78	V
r_F	*slope resistance* }					5.1	mΩ
R_{thJC}	*thermal resistance junction to case*					0.3	K/W
R_{thCH}	*thermal resistance case to heatsink*				0.3		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			500	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			850	A
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			920	A
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			725	A
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			780	A
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			3.62	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			3.52	kA²s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			2.63	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			2.53	kA²s
C_J	*junction capacitance*	V_R = 400 V; f = 1 MHz	T_{VJ} = 25°C		33		pF


OBSOLETE

© 2019 IXYS all rights reserved

Downloaded from Arrow.com.

Package TO-247			Ratings			
Symbol	**Definition**	**Conditions**	**min.**	**typ.**	**max.**	**Unit**
I_{RMS}	*RMS current*	per terminal			70	A
T_{VJ}	*virtual junction temperature*		-55		175	°C
T_{op}	*operation temperature*		-55		150	°C
T_{stg}	*storage temperature*		-55		150	°C
Weight				6		g
M_D	*mounting torque*		0.8		1.2	Nm
F_C	*mounting force with clip*		20		120	N

Product Marking




Part description

D = Diode
L = Low Voltage Standard Rectifier
A = (up to 1200V)
60 = Current Rating [A]
I = Single Diode
1200 = Reverse Voltage [V]
HA = TO-247AD (2)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DLA60I1200HA	DLA60I1200HA	Tube	30	508170

Equivalent Circuits for Simulation

** on die level* $T_{VJ} = 175°C$



Rectifier


$V_{0\ max}$	*threshold voltage*	0.78	V
$R_{0\ max}$	*slope resistance **	2.5	mΩ

OBSOLETE

© 2019 IXYS all rights reserved


Downloaded from Arrow.com.

Outlines TO-247

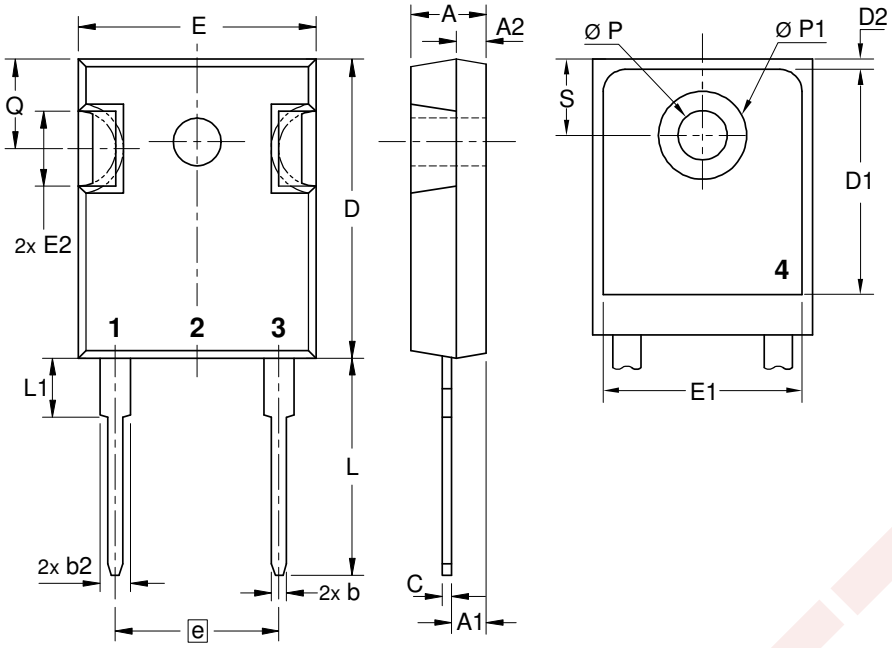

Sym.	Inches		Millimeter	
	min.	max.	min.	max.
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.430 BSC		10.92 BSC	
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
Ø P	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242 BSC		6.14 BSC	
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
Ø P1	-	0.29	-	7.39

OBSOLETE



© 2019 IXYS all rights reserved

Downloaded from Arrow.com.

Rectifier

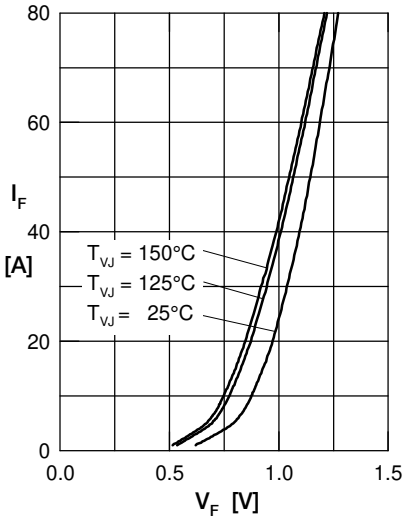


Fig. 1 Forward current versus voltage drop per diode

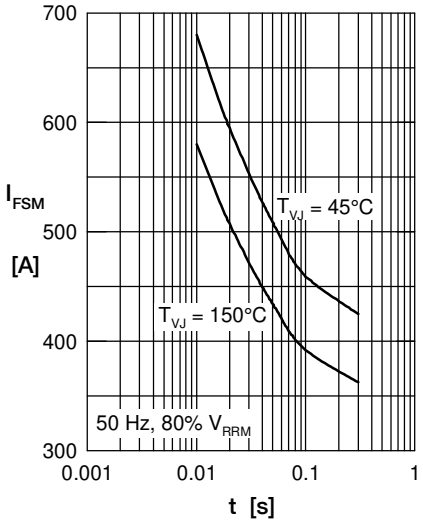


Fig. 2 Surge overload current

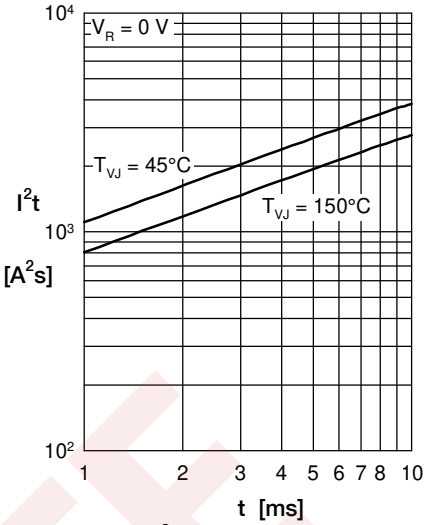


Fig. 3 I^2t versus time per diode

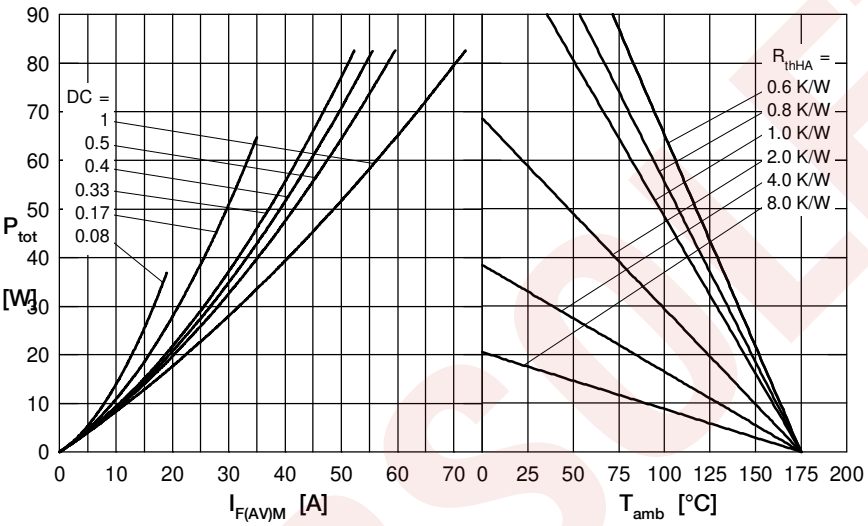


Fig. 4 Power dissipation vs. direct output current and ambient temperature

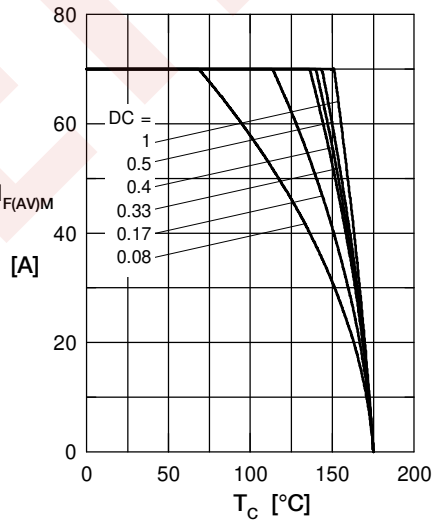


Fig. 5 Max. forward current vs. case temperature

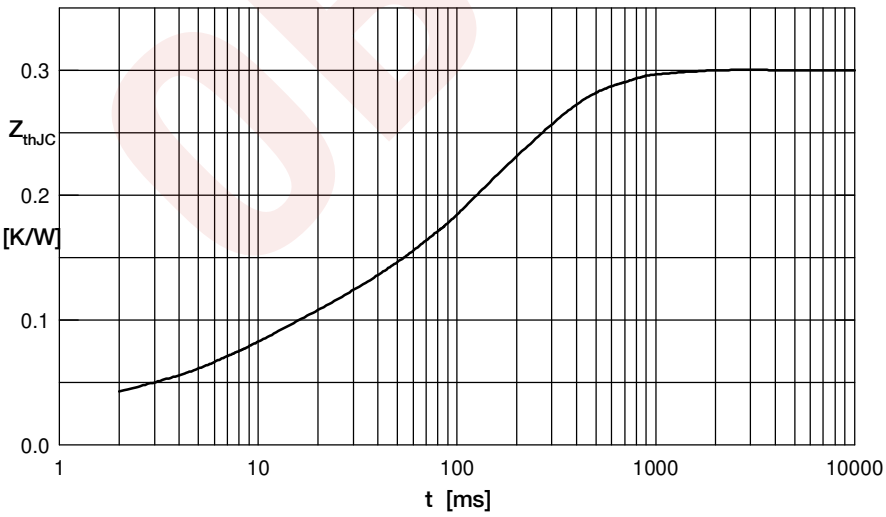


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.044	0.007
2	0.027	0.0001
3	0.029	0.02
4	0.05	0.37
5	0.15	0.15

© 2019 IXYS all rights reserved

Downloaded from Arrow.com.