

1551422

https://www.phoenixcontact.com/us/products/1551422

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 8-position, Socket, straight, M12, A-coding, THR solder connection, this item is expected to be lead-free from Q4 2025 in accordance with RoHS II without exception 6c (Pb < 0. 1%), a lead-free alternative is possible on request in advance

Your advantages

- · Reduced mounting costs thanks to two-piece device connector
- · Packaging available for automated pick and place assembly
- · All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Additional gasket for the device when not plugged in

Commercial data

Item number	1551422
Packing unit	60 pc
Minimum order quantity	60 pc
Sales key	AB23
Product key	ABQAGG
GTIN	4046356153706
Weight per piece (including packing)	5.29 g
Weight per piece (excluding packing)	2.695 g
Customs tariff number	85366990
Country of origin	DE



1551422

https://www.phoenixcontact.com/us/products/1551422

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector
	is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54.
	Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.

Product properties

Product type	Contact insert
Application	Signal
Number of positions	8
Seal present	yes
Shielded	yes
Coding	A
Thread type	M12
Insulation characteristics	

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	30 V
Nominal current I _N	2 A

Connection data

Connection method THR solder connection	Connection method	THR solder connection
---	-------------------	-----------------------

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM / EPDM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PPA

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12



1551422

https://www.phoenixcontact.com/us/products/1551422

Coding	A
Cable/line	
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)
Mechanical properties	
Mechanical data	
Insertion/withdrawal cycles	> 100
Environmental and real-life conditions Ambient conditions	
Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)
Degree of protection	IP67 (correctly plugged in and locked)
Ambient temperature (operation) (male connector/female	-25 °C 85 °C (Plug / socket)
connector)	-40 °C 85 °C (without mechanical actuation)
Ambient temperature (operation) (Cable, flexible installation)	-25 °C 85 °C (Cable, flexible installation)
Ambient temperature (operation) (Cable, fixed installation)	-40 °C 85 °C (cable, fixed installation)
Standards and regulations	
Standard designation	M12 circular connector
Standards/specifications	according to IEC 61076-2-101
Packaging specifications	
Type of packaging	Tray




1551422

https://www.phoenixcontact.com/us/products/1551422

Drawings



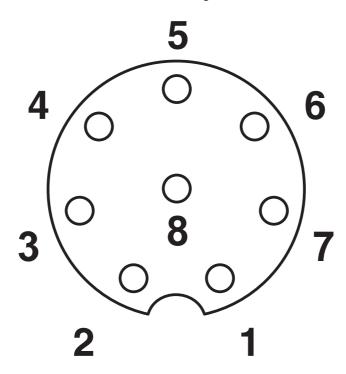

Pin assignment M12 socket, 8-pos., A-coded, view female side



1551422

https://www.phoenixcontact.com/us/products/1551422

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1551422

7/	UL Recognized Approval ID: E118976-20	0100522			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		30 V	2 A	24	-



1551422

https://www.phoenixcontact.com/us/products/1551422

Classifications

ECLASS

	ECLASS-13.0	27440110
	ECLASS-15.0	27440110
ET	IM	
ET	IM ETIM 9.0	EC003568

UNSPSC

|--|



1551422

https://www.phoenixcontact.com/us/products/1551422

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	2e95e33a-6b13-4adf-9d57-19cf0aa6bd48

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com