

Slider Click



PID: MIKROE-2702

Slider click features a mechanical slide action potentiometer - a slider, which gives a nice feeling when actuating, along with 16 SMD LEDs, that can be used for any kind of visual feedback. The onboard high-resolution 22-bit ADC can detect even the smallest move, faithfully capturing the smoothness of the slider movement, while digitizing its position. The 16 onboard SMD LEDs can give a nice visual feedback of the slider position, but those LEDs can also be used for other purposes since they are not hardwired to the slider.

Slider click can be used to control various digital applications with an accurate and comfortable slider potentiometer, while the LEDs can be used to display the desired information in a form of a bar or a position. For example, Slider click can be used to control a quad digital potentiometer, such as the one that can be found on DIGIPOT 5 click, while displaying the position of the selected digital wiper on the LEDs.

Slider click features a mechanical slide action potentiometer - a slider, which gives a nice feeling when actuating, along with 16 SMD LEDs, that can be used for any kind of visual feedback. The onboard high-resolution 22-bit ADC can detect even the smallest move, faithfully capturing the smoothness of the slider movement, while digitizing its position. The 16 onboard SMD LEDs can give a nice visual feedback of the slider position, but those LEDs can also be used for other purposes since they are not hardwired to the slider.

Slider click can be used to control various digital applications with an accurate and comfortable slider potentiometer, while the LEDs can be used to display the desired information in a form of a bar or a position. For example, Slider click can be used to control a quad digital potentiometer, such as the one that can be found on DIGIPOT 5 click, while displaying the

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

position of the selected digital wiper on the LEDs.

How does it work?

Slider click consists of two sections: the first section is the slider section itself, with the sliding potentiometer end terminals connected between GND and the VCC, and the wiper connected to the [MCP3551](#) IC, which is a low-power, single-channel 22-bit delta-sigma ADC from [Microchip](#). The slider acts as a voltage divider so that the voltage between the GND and the wiper position is determined by the slider position. This voltage is then applied to the input pin of the 22bit ADC converter and converted to a digital value. The MCP3551 has its SPI lines routed to the mikroBUS™ so that the values can be read easily by the MCU.

The second section of this click board™ consists of the [MAX6969](#), a well know 16-port, constant-current LED driver from [Maxim Integrated](#), used to control the SMD LEDs. The MAX6969 IC uses the same SPI lines as the ADC, but to avoid data collision, different chip select (CS) line is used. While the ADC uses the CS line routed to the CS pin of the mikroBUS™, the LED driver uses the RST line of the mikroBUS™ as the chip select input. This allows to work with both ICs independently. MAX6969 output enable (OE) pin is routed to the AN pin of the mikroBUS™, making it easy to completely turn off the output stage of the MAX6969, by setting this pin to a HIGH logic state. If left floating, this pin will be pulled down to the GND by the 10K resistor. The output LED current is constant and it is set to around 20mA by the resistor on the SET pin of the MAX6969.

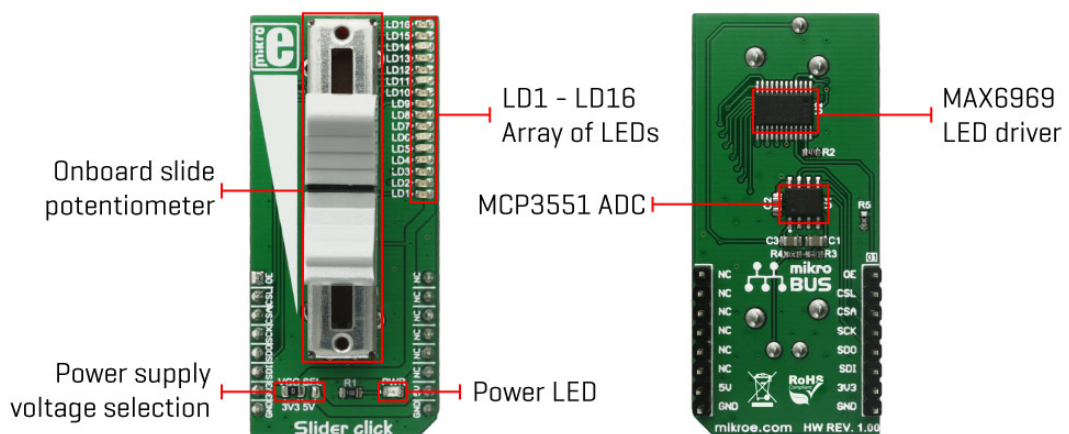

This click board™ can work with both 3.3V and 5V, depending on the used MCU capabilities. This can be done by switching the VCC SEL SMD jumper to the desired position.

Specifications

Type	Potentiometer
Applications	It can be used to control various digital applications with an accurate and comfortable slider potentiometer, such as the PWM ratio for the lighting, digital volume for the audio amplifiers, BLDC motor speed control and similar.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

On-board modules	MCP3551 - a single channel 22bit delta-sigma ADC from Microchip, MAX6969 - a 16 segment LED driver from Maxim Integrated
Key Features	It features a smooth action slider pot, that can be used to control any digital application. The onboard 22bit ADC allows a very precise and faithful capture of the slider movement. 16 LEDs can be used independently for a visual feedback.
Interface	GPIO, SPI
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V or 5V

Pinout diagram

This table shows how the pinout on **Slider click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
LED Driver Output Enable	OE	1	AN	PWM	16	NC	
LED Driver SPI CS	CSL	2	RST	INT	15	NC	
AD Converter SPI CS	CSA	3	CS	RX	14	NC	
SPI Clock	SCK	4	SCK	TX	13	NC	
SPI Data Out	SDO	5	MISO	SCL	12	NC	
SPI Data In	SDI	6	MOSI	SDA	11	NC	
Power Supply	+3.3V	7	3.3V	5V	10	+5V	Power Supply
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD0	PWR	-	Power LED indicator
JP1	VCC SEL	Left	Power supply voltage selection: left position 3V3, right position 5V
P1	P1	-	On-board slide potentiometer
LD1-LD16	LD1-LD16	-	Array of 16 SMD LEDs

Software support

We provide a library for Slider click on our [LibStock](#) page, as well as a demo application (example), developed using MikroElektronika [compilers](#) and [mikroSDK](#). The provided click library is mikroSDK standard compliant. The demo application can run on all the main

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

MikroElektronika [development boards](#).

Examples Description

This example shows how to read ADC value from MCP3551, and usage of LED Driver MAX6969 via SPI. When user changes the position of the slider, the LEDs on the click will turn ON and OFF accordingly.

The application is composed of two sections :

- System Initialization - Initializes GPIO pins, SPI peripheral used for MCP3551 and MAX6363
- Application Task - Sequentially reads ADC value from MCP3551 and show measurement using Slider click built-in bar graph.

```
void applicationInit()  
{  
  // READ ADC MCP3551  
  adcValue = MCP3551_Read() / DIVIDER;  
  
  // RECALCULATE VALUE  
  if (adcValue > 99)  
  {  
    adcValue = 100;  
  }  
  adcValue = adcValue / 6;  
  
  // SHOW MEASUREMENTS USING SLIDER BARGRAPH  
  bargraph( adcValue );  
}
```

The full application code, and ready to use projects can be found on our [LibStock](#) page.

Other MikroElektronika Libraries used in the example:

- SPI

mikroSDK

This click board is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant click board demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™ Standard specifications](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

Downloads

[MCP3551 datasheet](#)

[MAX6969 datasheet](#)

[Slider click schematic](#)

[Slider click - 2D and 3D files](#)

[Slider click example on Libstock](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).