

# Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees



**November 2013** 

# **FDB15N50**

# N-Channel UniFET<sup>™</sup> MOSFET 500 V, 15 A, 380 mΩ

## **Features**


- $\bullet$  Low gate charge  $Q_{\text{g}}$  results in simple drive requirement (Typ. 33 nC)
- Improved Gate, avalanche and high reapplied dv/dt ruggedness
- Reduced  $R_{DS(on)}$  (  $330m\Omega$  ( Typ.) @  $V_{GS}$  = 10 V,  $I_D$  = 7.5 A)
- Reduced Miller capacitance and low Input capacitance (Typ. C<sub>rss</sub> = 16 pF)
- Improved switching speed with low EMI
- 175°C rated junction temperature


# Description

UniFET™ MOSFET is Fairchild Semiconductor's high voltage MOSFET family based on planar stripe and DMOS technology. This MOSFET is tailored to reduce on-state resistance, and to provide better switching performance and higher avalanche energy strength. This device family is suitable for switching power converter applications such as power factor correction (PFC), flat panel display (FPD) TV power, ATX and electronic lamp ballasts.

# **Applications**

- Lighting
- · Uninterruptible Power Supply
- AC-DC Power Supply





# **Absolute Maximum Ratings** T<sub>C</sub> = 25°C unless otherwise noted.

Symbol	Parameter	FDB15N50	Unit	
V <sub>DSS</sub>	Drain to Source Voltage	500	V	
V <sub>GS</sub>	Gate to Source Voltage	±30	V	
	Drain Current Continuous (T <sub>C</sub> = 25°C, V <sub>GS</sub> = 10V)	15	А	
I <sub>D</sub>	Continuous ( $T_C = 100^{\circ}C$ , $V_{GS} = 10V$ )	11	Α	
	Pulsed (Note	(1) 60	Α	
P <sub>D</sub>	Power dissipation Derate above 25°C	300 2	W W/°C	
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature	-55 to 175	°C	
	Soldering Temperature for 10 seconds	300 (1.6mm from case)	°C	

## **Thermal Characteristics**

Symbol	Parameter	FDB15N50	Unit	
$R_{ heta JC}$	Thermal Resistance Junction to Case, Max.	0.50	°C/W	
$R_{\theta JA}$	Thermal Resistance Junction to Ambient, Max.	62	°C/W	

©2003 Fairchild Semiconductor Corporation FDB15N50 Rev. C1

www.fairchildsemi.com


# **Package Marking and Ordering Information**

Device Marking Device		Package	Reel Size	Tape Width	Quantity	
FDB15N50	FDB15N50	D <sup>2</sup> -PAK	330 mm	24 mm	800 units	

# **Electrical Characteristics** $T_J = 25$ °C unless otherwise noted.


Symbol	Parameter	Test Con	ditions	Min	Тур	Max	Unit
Statics							
B <sub>VDSS</sub>	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_G$	S = 0V	500	-	-	V
ΔB <sub>VDSS</sub> /ΔT <sub>J</sub>	Breakdown Voltage Temp. Coefficient	Reference to 25 I <sub>D</sub> = 1mA	5°C,	-	0.58	-	V/°C
R <sub>DS(ON)</sub>	Drain to Source On-Resistance	$V_{GS} = 10V, I_D =$	: 7.5A	-	0.33	0.38	Ω
V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} =$	= 250µA	2.0	3.4	4.0	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	$V_{DS} = 500V$ $V_{GS} = 0V$	$T_{\rm C} = 25^{\rm o}{\rm C}$ $T_{\rm C} = 150^{\rm o}{\rm C}$	-	-	25 250	μΑ
I <sub>GSS</sub>	Gate to Source Leakage Current	$V_{GS} = \pm 30V$		-	-	±100	nA
Dynamics	3			\.			
9 <sub>fs</sub>	Forward Transconductance	$V_{DD} = 10V, I_{D} =$	= 7.5A	10	-	-	S
$Q_{g(TOT)}$	Total Gate Charge at 10V	$V_{GS} = 10V$ ,		-	33	41	nC
$Q_{gs}$	Gate to Source Gate Charge	$V_{DS} = 400V$ ,		- \	7.2	10	nC
$Q_{gd}$	Gate to Drain "Miller" Charge	I <sub>D</sub> = 15A		-	12	16	nC
t <sub>d(ON)</sub>	Turn-On Delay Time	V <sub>DD</sub> = 250V,		-	9		ns
t <sub>r</sub>	Rise Time	$I_D = 15A,$ $R_G = 6.2\Omega,$ $R_D = 17\Omega$		-	5.4	-	ns
t <sub>d(OFF)</sub>	Turn-Off Delay Time			-	26	-	ns
t <sub>f</sub>	Fall Time			-	5	-	ns
C <sub>ISS</sub>	Input Capacitance	051/1/	0) (	-	1850	-	pF
Coss	Output Capacitance		<sub>DS</sub> = 25V, V <sub>GS</sub> = 0V, = 1MHz	-	230	-	pF
C <sub>RSS</sub>	Reverse Transfer Capacitance	1 - 1101112		-	16	-	pF
Avalanch	e Characteristics						
E <sub>AS</sub>	Single Pulse Avalanche Energy (Note 2)			760	/ -	-	mJ
I <sub>AR</sub>	Avalanche Current			-	-	15	Α
Drain-Soເ	rce Diode Characteristics						
I <sub>S</sub>	Continuous Source Current (Body Diode)	MOSFET symbol showing the integral reverse p-n junction diode.		-	-	15	А
I <sub>SM</sub>	Pulsed Source Current (Body Diode) (Note 1)			-	-	60	А
$V_{SD}$	Source to Drain Diode Voltage	I <sub>SD</sub> = 15A		-	0.86	1.2	V
t <sub>rr</sub>	Reverse Recovery Time	$I_{SD} = 15A$ , $di_{SD}$	/dt = 100A/µs	-	470	730	ns
Q <sub>RR</sub>	Reverse Recovered Charge	$I_{SD} = 15A, di_{SD}$	/dt = 100A/µs	-	5	6.6	μC

Repetitive rating; pulse width limited by maximum junction temperature.
 Starting T<sub>J</sub> = 25°C, L = 7.0mH, I<sub>AS</sub> = 15A.

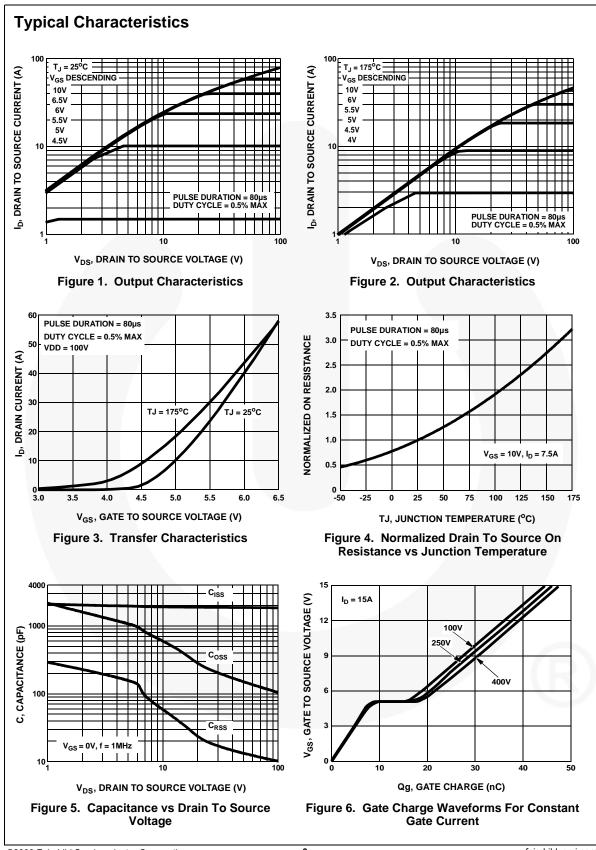

©2003 Fairchild Semiconductor Corporation FDB15N50 Rev. C1

www.fairchildsemi.com

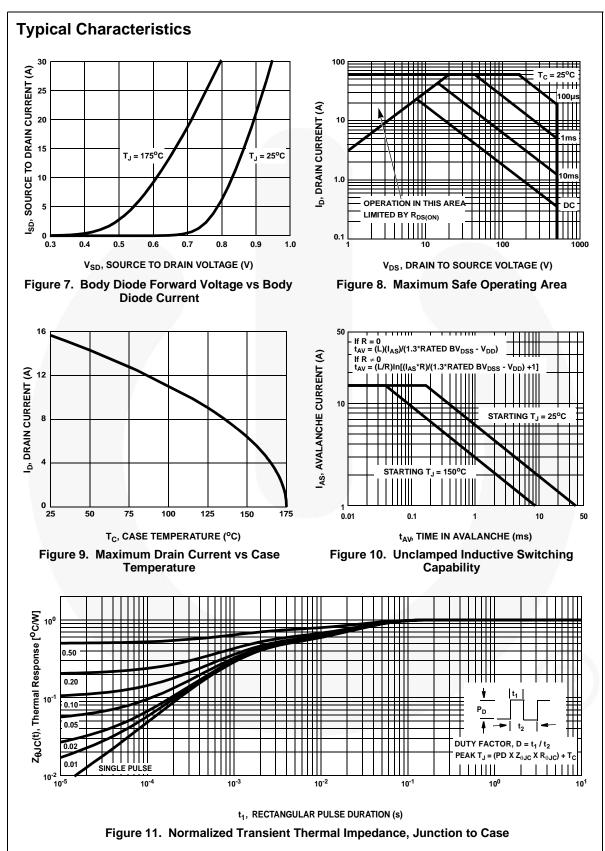

# 

Figure 12. Unclamped Energy Test Circuit

Figure 13. Unclamped Energy Waveforms

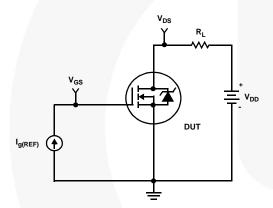


Figure 14. Gate Charge Test Circuit

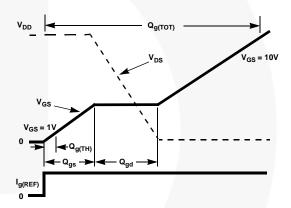


Figure 15. Gate Charge Waveforms

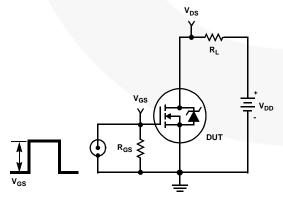


Figure 16. Switching Time Test Circuit

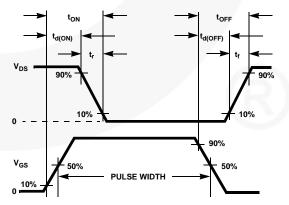


Figure 17. Switching Time Waveform

## **Mechanical Dimensions**

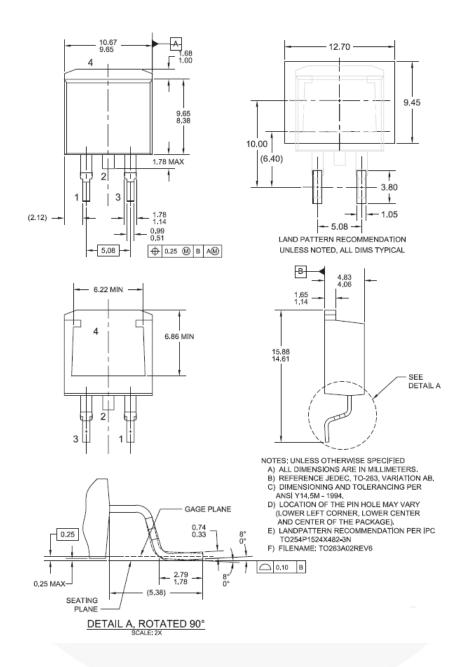


Figure 18. TO263 (D<sup>2</sup>PAK), Molded, 2-Lead, Surface Mount

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN TT263-002





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ AX-CAP®\* BitSiC™ Build it Now™ CorePLUS™

CorePOWER™  $CROSSVOLT^{\mathrm{TM}}$ CTL™

Current Transfer Logic™ DEUXPEED®

Dual Cool™ EcoSPARK® EfficentMax™ ESBC™

 $\bar{\text{Fairchild}^{\circledR}}$ Fairchild Semiconductor® FACT Quiet Series™

**FACT®** FAST® FastvCore™ FETBench™

F-PESTM FRFET®

Global Power Resource<sup>SM</sup> GreenBridge™

Green FPS™

Green FPS™ e-Series™ G*max*™ GTO™

IntelliMAX™ ISOPLANAR™

Marking Small Speakers Sound Louder

MegaBuck™ MICROCOUPLER™ MicroFET™

MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ mWSaver<sup>®</sup> OptoHiT™ OPTOLOGIC® OPTOPLANAR®  $(1)_{\mathbb{R}}$ PowerTrench® PowerXS™

Programmable Active Droop™

QFET® QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™ SignalWise™

SmartMax™ SMART START™

Solutions for Your Success™

STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SyncFET™

Sync-Lock™

SYSTEM ®\*
GENERAL TinyBoost TinyBuck<sup>®</sup> TinyCalc™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™

TranSiC™ TriFault Detect™ TRUECURRENT®\* µSerDes™

 $\mathcal{M}_{ ext{SerDes}}$ **UHC®** Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XSTM

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS **Definition of Terms**

Datasheet Identification Product Status		Definition
Advance Information Formative / In Design		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed Full Production		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete Not In Producti		Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 166

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hol

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative