

TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT Process) (Bias Resistor Built-in Transistor)


RN1701JE, RN1702JE, RN1703JE RN1704JE, RN1705JE, RN1706JE

Switching, Inverter Circuit, Interface Circuit and
Driver Circuit Applications

Unit: mm

- Two devices are incorporated into an Extreme-Super-Mini (5 pin) package.
- Incorporating a bias resistor into a transistor reduces parts count. Reducing the parts count enables the manufacture of ever more compact equipment and lowers assembly cost.
- A wide range of resistor values is available for use in various circuit designs.
- Complementary to RN2701JE to RN2706JE

Equivalent Circuit and Bias Resistor Values



Type No.	R1 (kΩ)	R2 (kΩ)
RN1701JE	4.7	4.7
RN1702JE	10	10
RN1703JE	22	22
RN1704JE	47	47
RN1705JE	2.2	47
RN1706JE	4.7	47

1.BASE1 (B1)	
2.EMITTER (E)	
3.BASE2 (B2)	
4.COLLECTOR2 (C2)	
5.COLLECTOR1 (C1)	
ESV	
JEDEC	—
JEITA	—
TOSHIBA	2-2P1D

Weight: 0.003 g (typ.)

Absolute Maximum Ratings (Ta = 25°C) (Q1, Q2 common)


Characteristics	Symbol	Rating	Unit
Collector-base voltage	RN1701JE to 1706JE V_{CBO}	50	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	RN1701JE to 1704JE V_{EBO}	10	V
	RN1705JE RN1706JE	5	
Collector current	I_C	100	mA
Collector power dissipation	RN1701JE to 1706JE P_C (Note 1)	100	mW
Junction temperature	T_j	150	°C
Storage temperature range	T_{stg}	−55 to 150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Total rating

Equivalent Circuit (top view)









Start of commercial production
2000-06







Electrical Characteristics (Ta = 25°C) (Q1, Q2 common)







Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	RN1701JE to RN1706JE	I_{CBO}	$V_{CB} = 50\text{ V}, I_E = 0$	—	—	100	nA
		I_{CEO}	$V_{CE} = 50\text{ V}, I_B = 0$	—	—	500	
Emitter cut-off current	RN1701JE	I_{EBO}	$V_{EB} = 10\text{ V}, I_C = 0$	0.82	—	1.52	mA
	RN1702JE			0.38	—	0.71	
	RN1703JE			0.17	—	0.33	
	RN1704JE			0.082	—	0.15	
	RN1705JE	I_{EBO}	$V_{EB} = 5\text{ V}, I_C = 0$	0.078	—	0.145	
	RN1706JE			0.074	—	0.138	
DC current gain	RN1701JE	h_{FE}	$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$	30	—	—	
	RN1702JE			50	—	—	
	RN1703JE			70	—	—	
	RN1704JE			80	—	—	
	RN1705JE			80	—	—	
	RN1706JE			80	—	—	
Collector-emitter saturation voltage	RN1701JE to RN1706JE	$V_{CE(sat)}$	$I_C = 5\text{ mA}, I_B = 0.25\text{ mA}$	—	0.1	0.3	V
Input voltage (ON)	RN1701JE	$V_{I(ON)}$	$V_{CE} = 0.2\text{ V}, I_C = 5\text{ mA}$	1.1	—	2.0	V
	RN1702JE			1.2	—	2.4	
	RN1703JE			1.3	—	3.0	
	RN1704JE			1.5	—	5.0	
	RN1705JE			0.6	—	1.1	
	RN1706JE			0.7	—	1.3	
Input voltage (OFF)	RN1701JE to RN1704JE	$V_{I(OFF)}$	$V_{CE} = 5\text{ V}, I_C = 0.1\text{ mA}$	1.0	—	1.5	V
	RN1705JE, RN1706JE			0.5	—	0.8	
Transition frequency	RN1701JE to RN1706JE	f_T	$V_{CE} = 10\text{ V}, I_C = 5\text{ mA}$	—	250	—	MHz
Collector output capacitance	RN1701JE to RN1706JE	C_{ob}	$V_{CB} = 10\text{ V}, I_E = 0, f = 1\text{ MHz}$	—	3	6	pF
Input resistor	RN1701JE	R1	—	3.29	4.7	6.11	k Ω
	RN1702JE			7	10	13	
	RN1703JE			15.4	22	28.6	
	RN1704JE			32.9	47	61.1	
	RN1705JE			1.54	2.2	2.86	
	RN1706JE			3.29	4.7	6.11	
Resistor ratio	RN1701JE to RN1704JE	R1/R2	—	0.9	1.0	1.1	
	RN1705JE			0.0421	0.0468	0.0515	
	RN1706JE			0.09	0.1	0.11	







Q1, Q2 Common

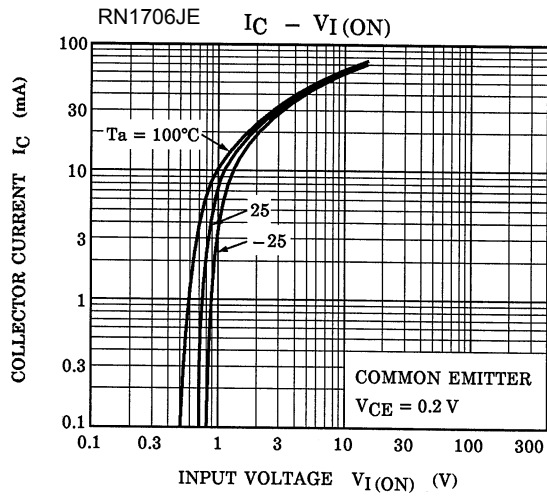
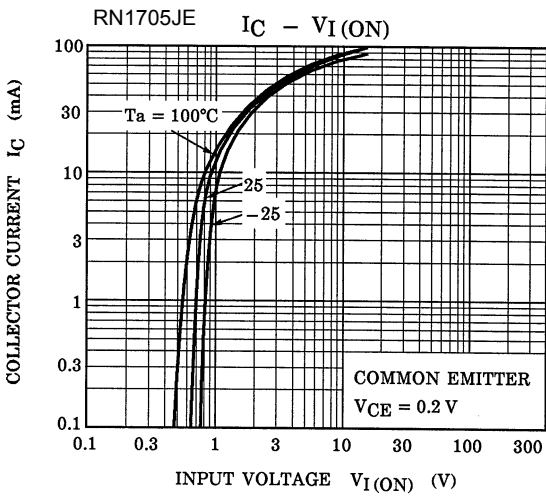
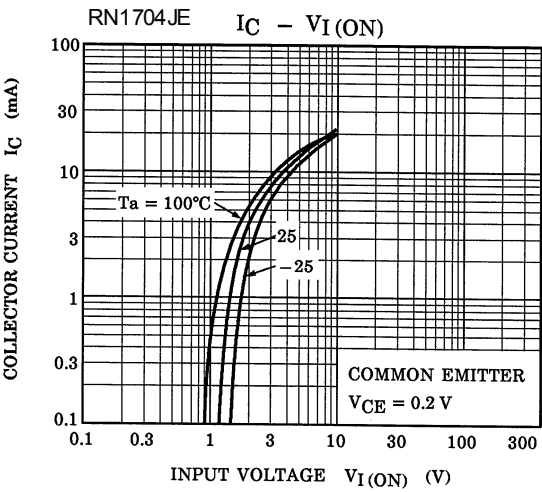
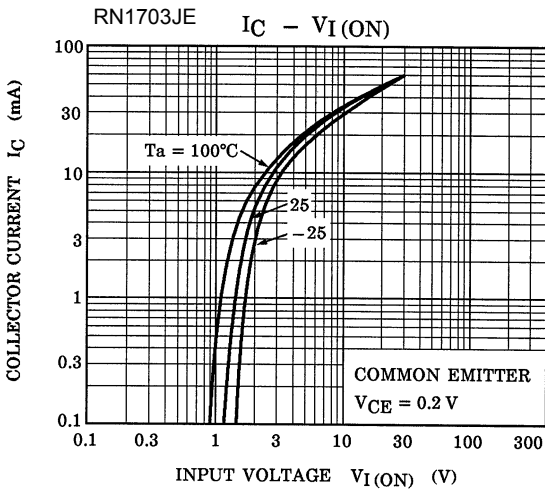
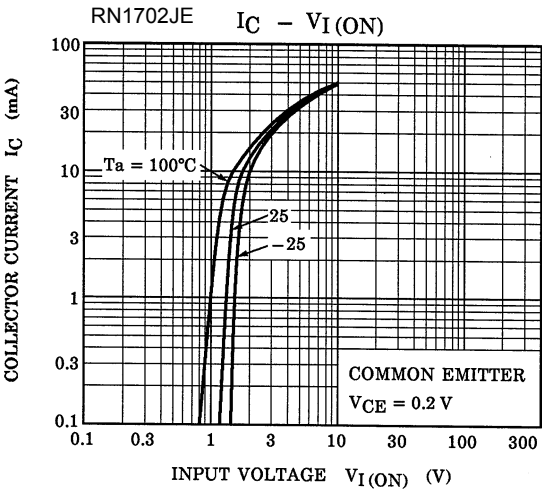
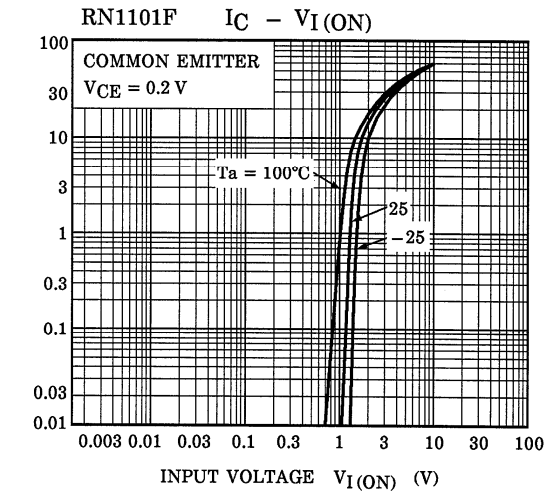


Q1, Q2 Common

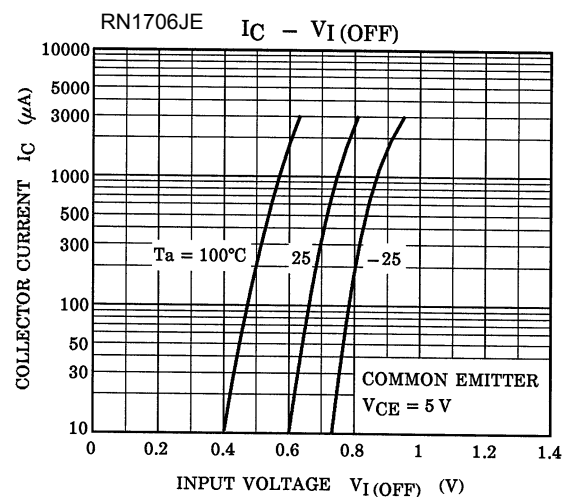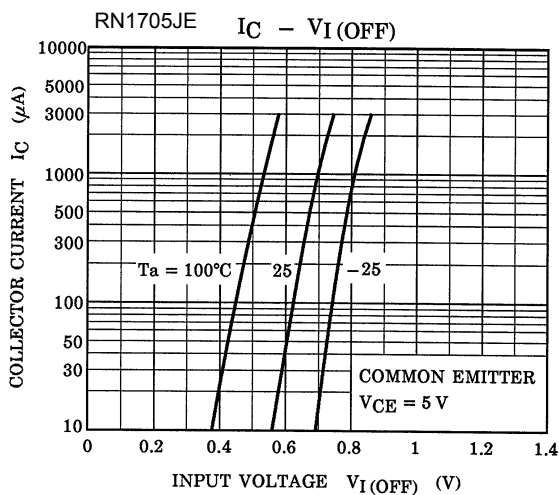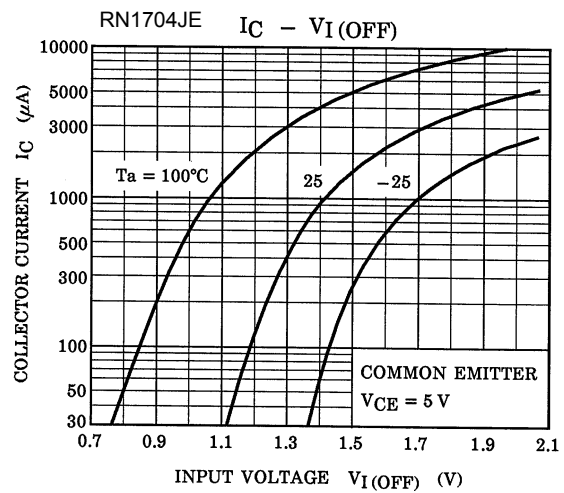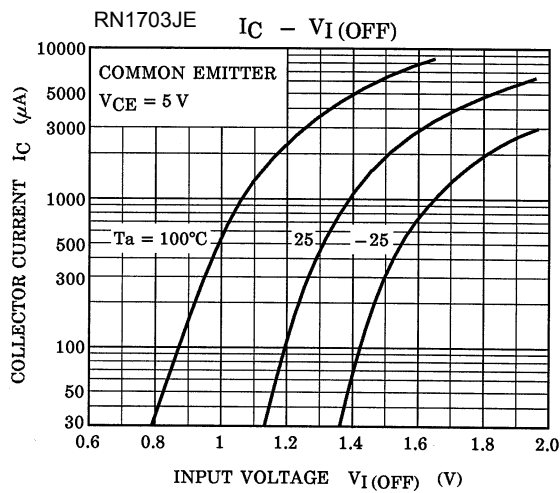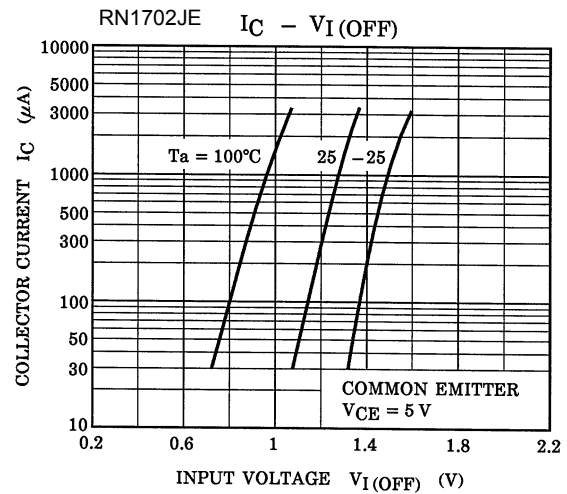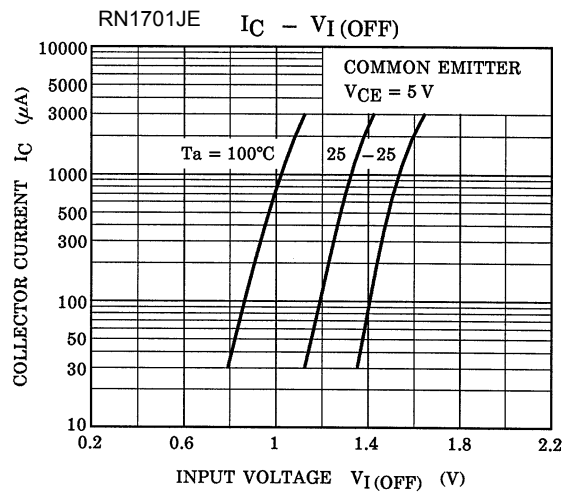

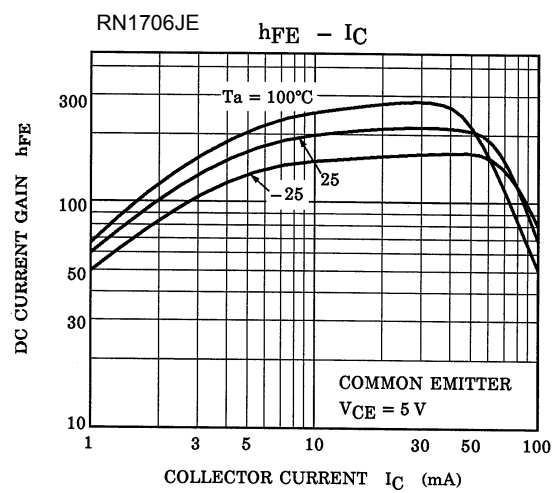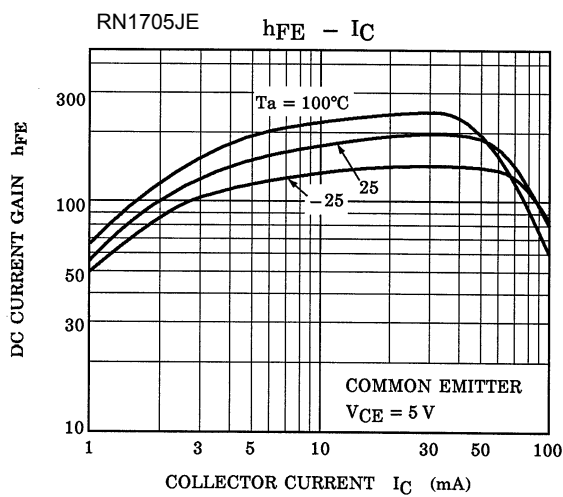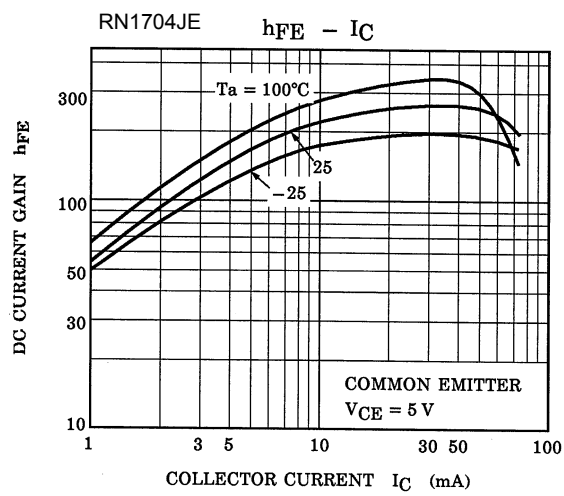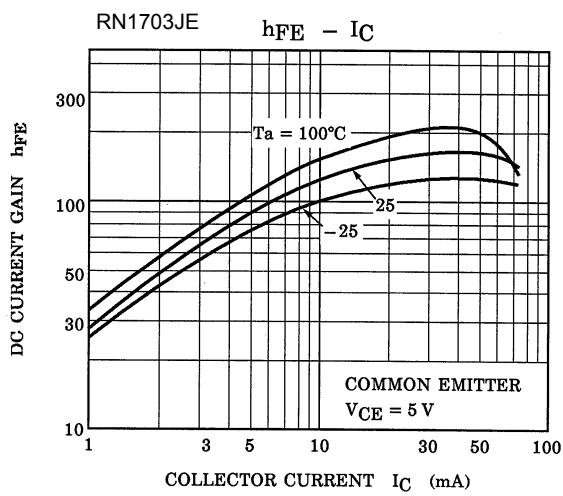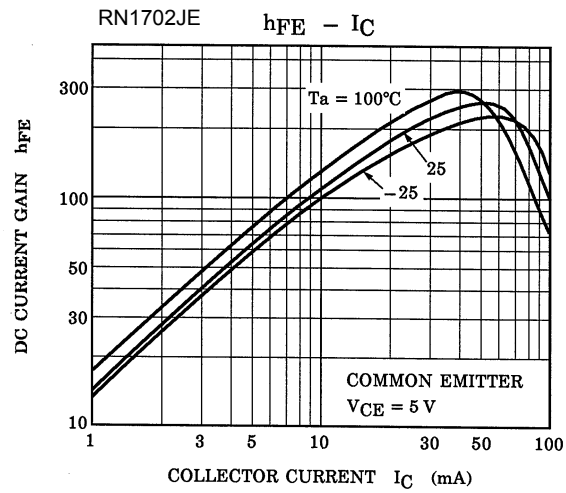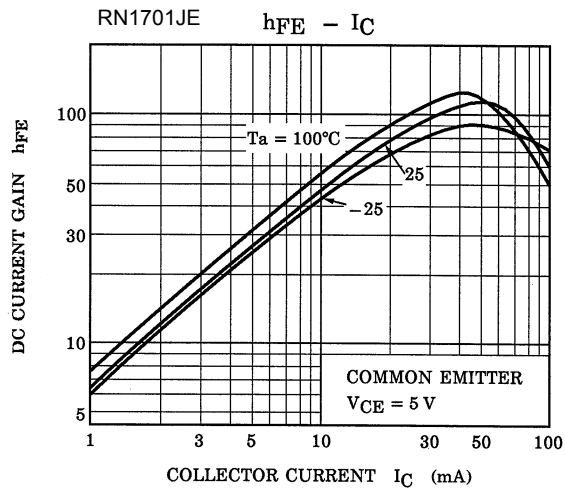

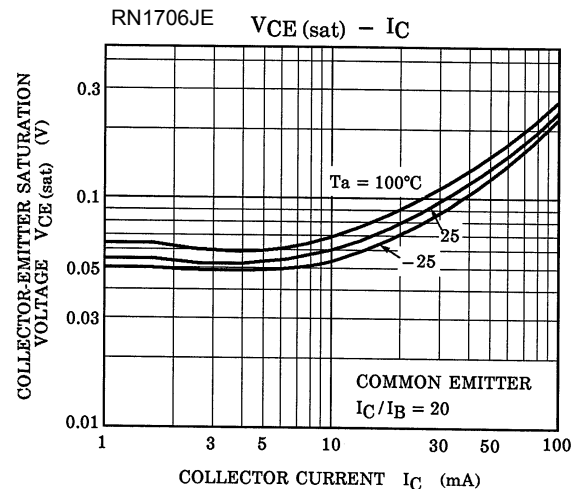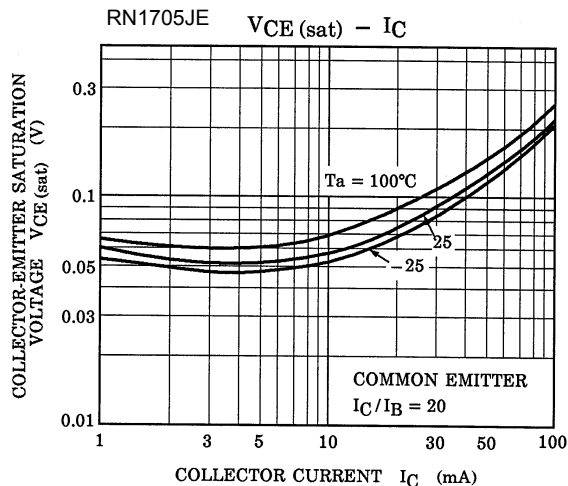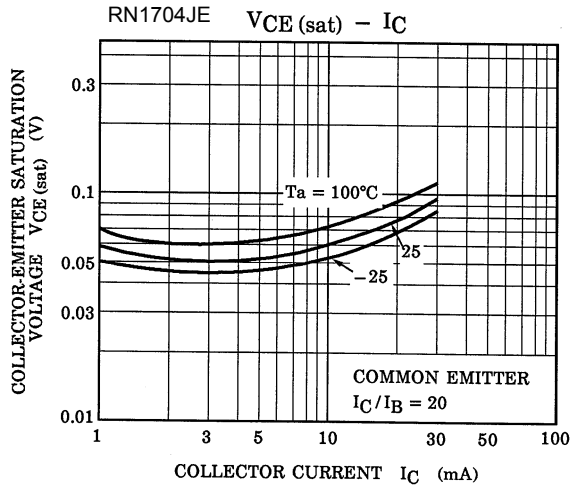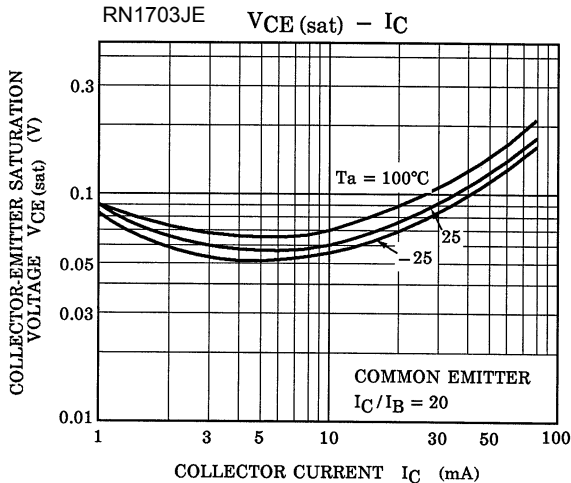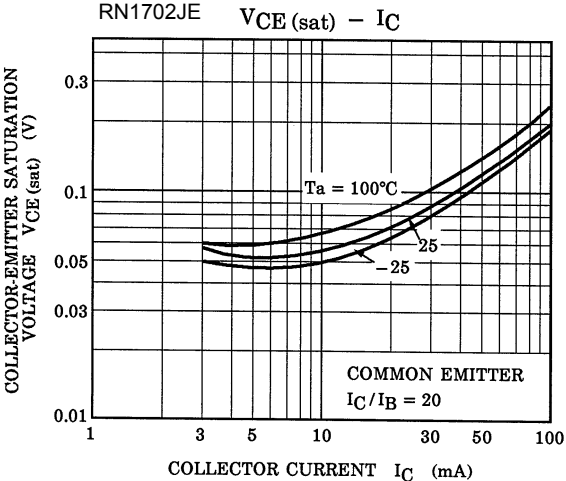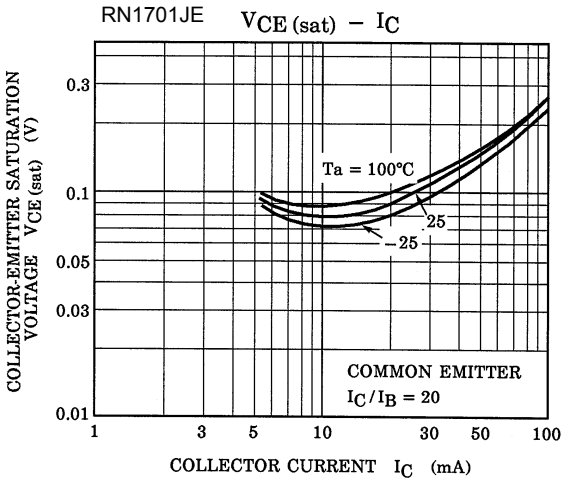

Type Name	Marking
RN1701JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, an arrow points from the text 'X A' to the top-left corner.
RN1702JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, an arrow points from the text 'X B' to the top-left corner.
RN1703JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, an arrow points from the text 'X C' to the top-left corner.
RN1704JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, an arrow points from the text 'X D' to the top-left corner.
RN1705JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, an arrow points from the text 'X E' to the top-left corner.
RN1706JE	 A diagram of a rectangular component with four pins on each of the longer sides. An arrow points from the text 'Type name' to the top-right corner. Inside the rectangle, an arrow points from the text 'X F' to the top-left corner.

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, Class 3 medical devices, equipment used for automobiles, and military vehicles and munitions. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**