To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010
Renesas Electronics Corporation

Not recommend for new design

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.

Downloaded from Arrow.com.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

   "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

   "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

   "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Not recommend for new design

Downloaded from Arrow.com.

DATA SHEET

RENESAS

MOS FIELD EFFECT TRANSISTOR

μPA1872

N-CHANNEL MOS FIELD EFFECT TRANSISTOR FOR SWITCHING

DESCRIPTION

The μPA1872 is a switching device which can be driven directly by a 2.5 V power source.

This device features a low on-state resistance and excellent switching characteristics, and is suitable for applications such as power switch of portable machine and so on.


FEATURES

- 2.5 V drive available
- Low on-state resistance
  $R_{DS(on)1}$ = 13.0 mΩ MAX. (V_{GS} = 4.5 V, I_D = 5.0 A)
  $R_{DS(on)2}$ = 13.5 mΩ MAX. (V_{GS} = 4.0 V, I_D = 5.0 A)
  $R_{DS(on)3}$ = 15.5 mΩ MAX. (V_{GS} = 3.1 V, I_D = 5.0 A)
  $R_{DS(on)4}$ = 18.0 mΩ MAX. (V_{GS} = 2.5 V, I_D = 5.0 A)
- Built-in G-S protection diode against ESD

ORDERING INFORMATION

PART NUMBER	PACKAGE
μPA1872GR-9JG	Power TSSOP8


PACKAGE DRAWING (Unit : mm)

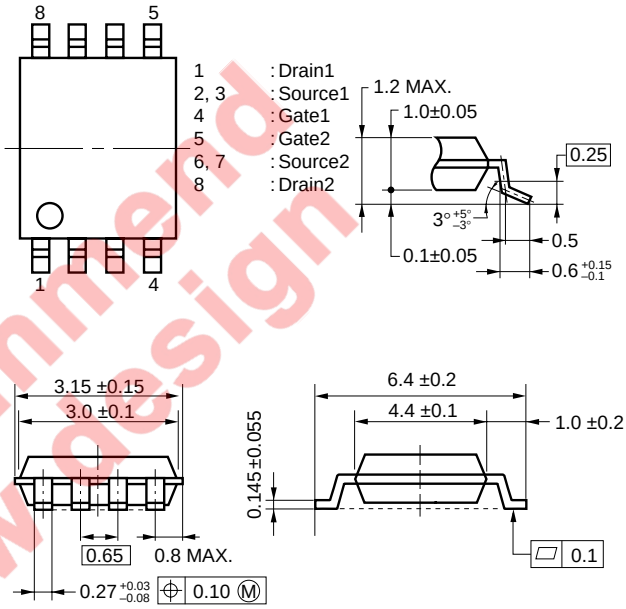

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)

Drain to Source Voltage (V_{GS} = 0 V)	V_{DSS}	20	V
Gate to Source Voltage (V_{DS} = 0 V)	V_{GSS}	±12	V
Drain Current (DC) (T_A = 25°C)	$I_{D(DC)}$	±10	A
Drain Current (pulse) Note1	$I_{D(pulse)}$	±80	A
Total Power Dissipation (2 unit) Note2	P_T	2.0	W
Channel Temperature	T_{ch}	150	°C
Storage Temperature	T_{stg}	–55 to +150	°C

EQUIVALENT CIRCUIT

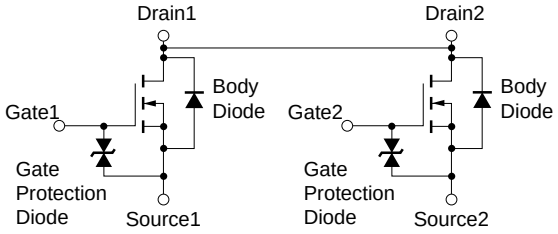

Notes 1. PW ≤ 10 μs, Duty Cycle ≤ 1%
2. Mounted on ceramic substrate of 5000 mm^2 x 1.1 mm

Remark The diode connected between the gate and source of the transistor serves as a protector against ESD. When this device actually used, an additional protection circuit is externally required if a voltage exceeding the rated voltage may be applied to this device.

Not recommend for new design

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

Document No. G15622EJ1V0DS00 (1st edition)
Date Published December 2001 NS CP(K)
Printed in Japan

© NEC Corporation 2001


Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS (T_A = 25°C)


CHARACTERISTICS	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 20 V, V_{GS} = 0 V			10	μA
Gate Leakage Current	I_{GSS}	V_{GS} = ±12 V, V_{DS} = 0 V			±10	μA
Gate Cut-off Voltage	$V_{GS(off)}$	V_{DS} = 10 V, I_D = 1.0 mA	0.5	1.0	1.5	V
Forward Transfer Admittance	$\|y_{fs}\|$	V_{DS} = 10 V, I_D = 5.0 A	5.0			S
Drain to Source On-state Resistance	$R_{DS(on)1}$	V_{GS} = 4.5 V, I_D = 5.0 A	8.0	10.0	13.0	mΩ
	$R_{DS(on)2}$	V_{GS} = 4.0 V, I_D = 5.0 A	8.5	10.5	13.5	mΩ
	$R_{DS(on)3}$	V_{GS} = 3.1 V, I_D = 5.0 A	9.0	11.5	15.5	mΩ
	$R_{DS(on)4}$	V_{GS} = 2.5 V, I_D = 5.0 A	10.0	13.5	18.0	mΩ
Input Capacitance	C_{iss}	V_{DS} = 10 V		1200		pF
Output Capacitance	C_{oss}	V_{GS} = 0 V		370		pF
Reverse Transfer Capacitance	C_{rss}	f = 1.0 MHz		270		pF
Turn-on Delay Time	$t_{d(on)}$	V_{DD} = 10 V, I_D = 5.0 A		60		ns
Rise Time	t_r	V_{GS} = 4.0 V		350		ns
Turn-off Delay Time	$t_{d(off)}$	R_G = 10 Ω		450		ns
Fall Time	t_f			640		ns
Total Gate Charge	Q_G	V_{DD} = 16 V		15		nC
Gate to Source Charge	Q_{GS}	V_{GS} = 4.0 V		2.0		nC
Gate to Drain Charge	Q_{GD}	I_D = 10 A		8.0		nC
Body Diode Forward Voltage	$V_{F(S-D)}$	I_F = 10 A, V_{GS} = 0 V		0.83		V
Reverse Recovery Time	t_{rr}	I_F = 10 A, V_{GS} = 0 V		470		ns
Reverse Recovery Charge	Q_{rr}	di/dt = 50 A / μs		990		nC

Not recommend for new design


TEST CIRCUIT 1 SWITCHING TIME

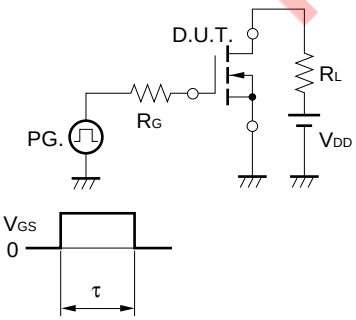

τ = 1 μs
Duty Cycle ≤ 1%

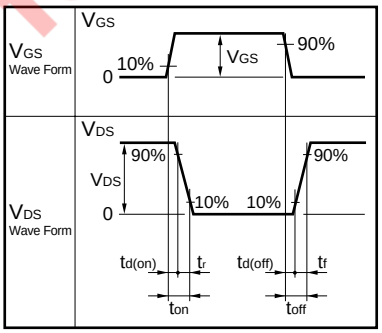


TEST CIRCUIT 2 GATE CHARGE

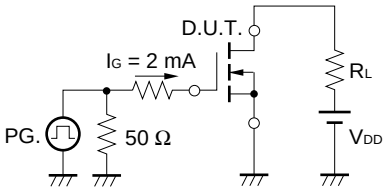


Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_A = 25°C)


DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

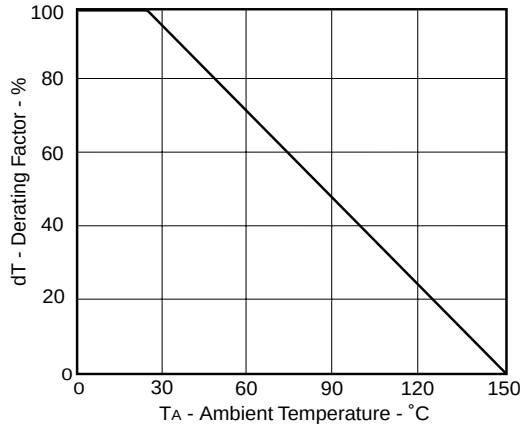


FORWARD BIAS SAFE OPERATING AREA

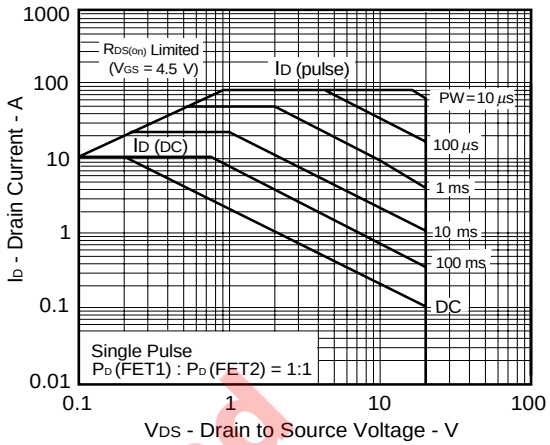


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

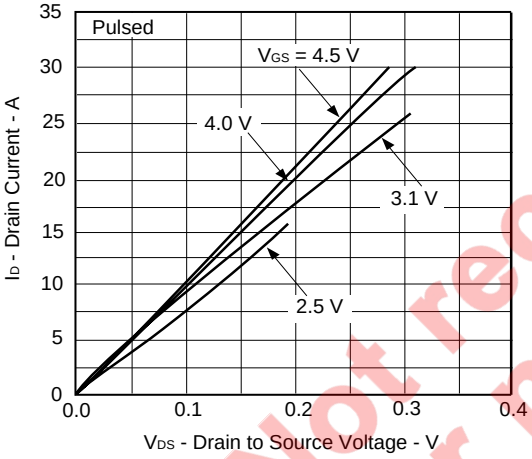


FORWARD TRANSFER CHARACTERISTICS

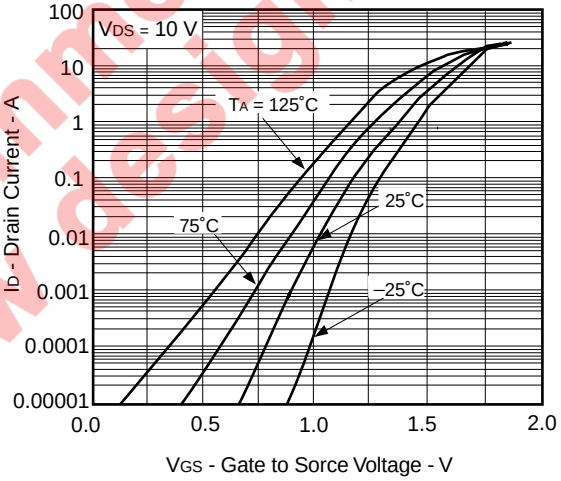

GATE TO SOURCE CUT-OFF VOLTAGE vs. CHANNEL TEMPERATURE

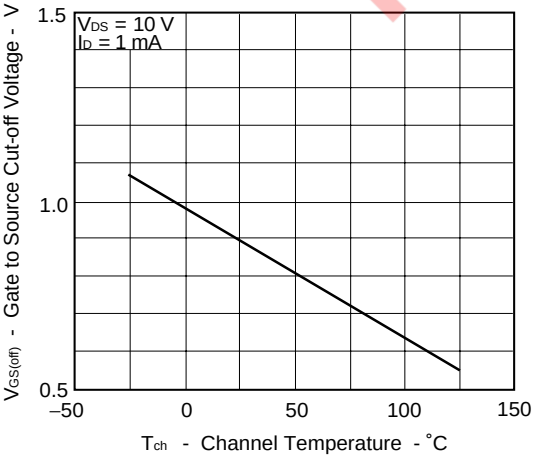


FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

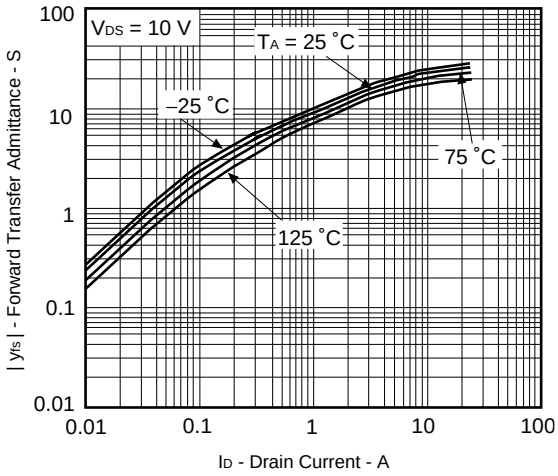


Not recommend for new design

Downloaded from Arrow.com.


DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

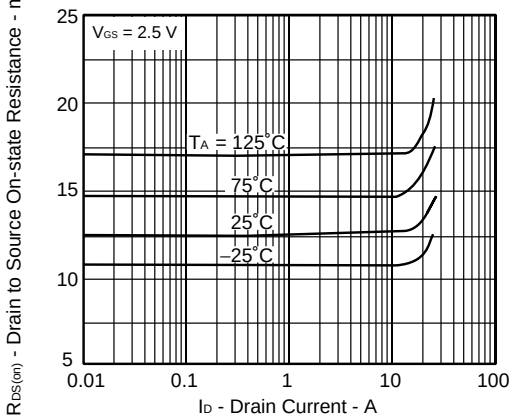


DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

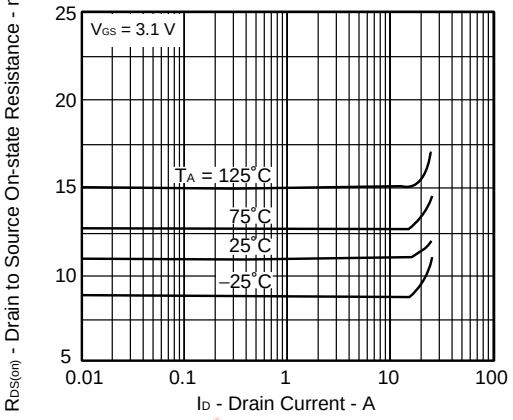


DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

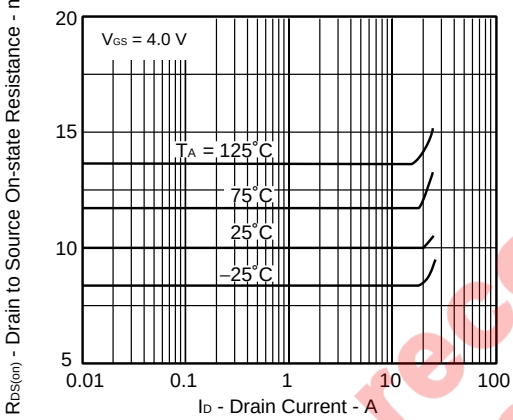


DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

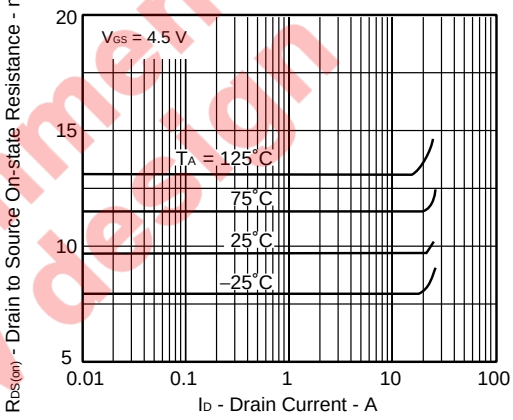

DRAIN TO SOURCE ON-STATE RESISTANCE vs. CHANNEL TEMPERATURE

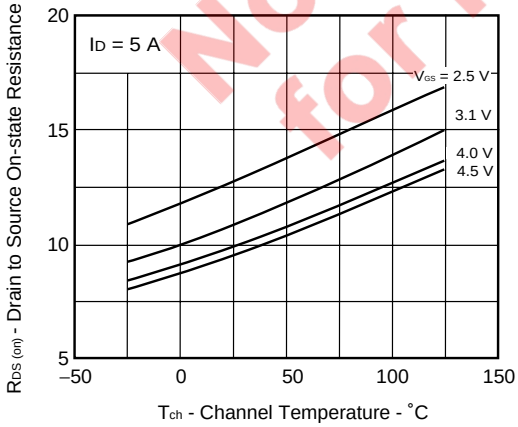


DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE

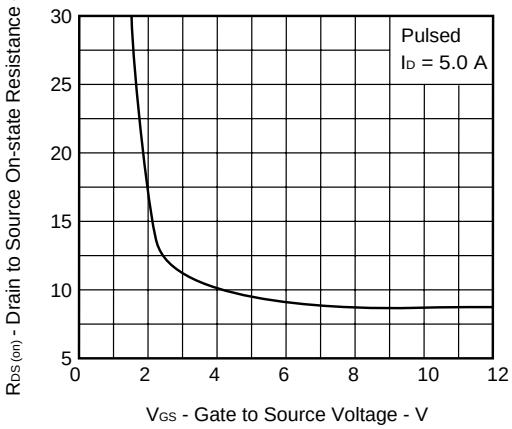


Not recommend for new design

Downloaded from Arrow.com.


CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE

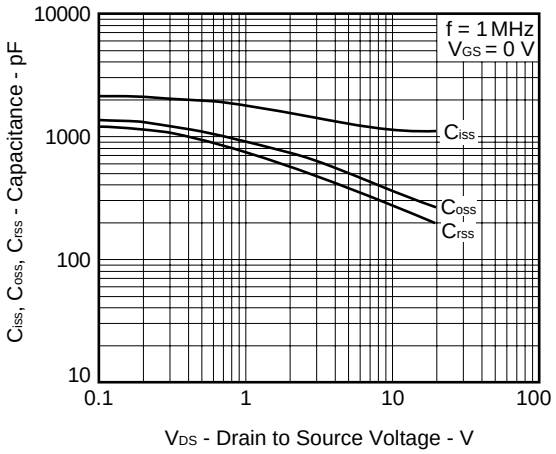


SWITCHING CHARACTERISTICS

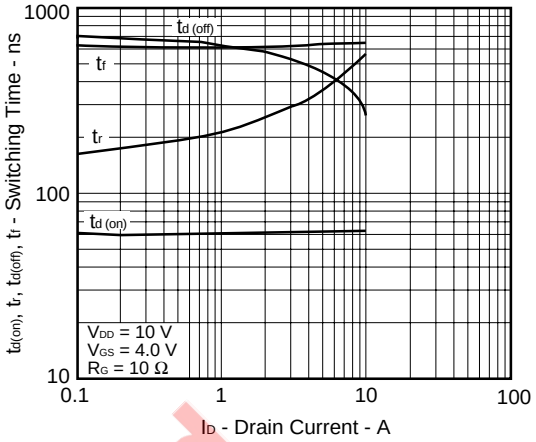


SOURCE TO DRAIN DIODE FORWARD VOLTAGE

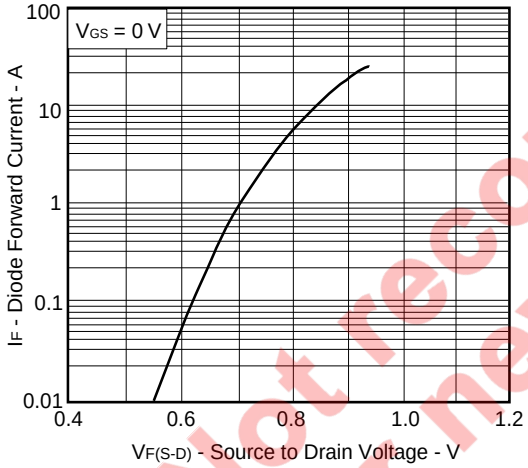

DYNAMIC INPUT/OUTPUT CHARACTERISTICS

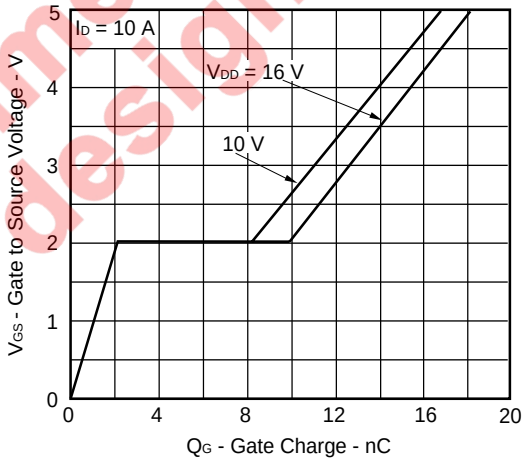

TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH

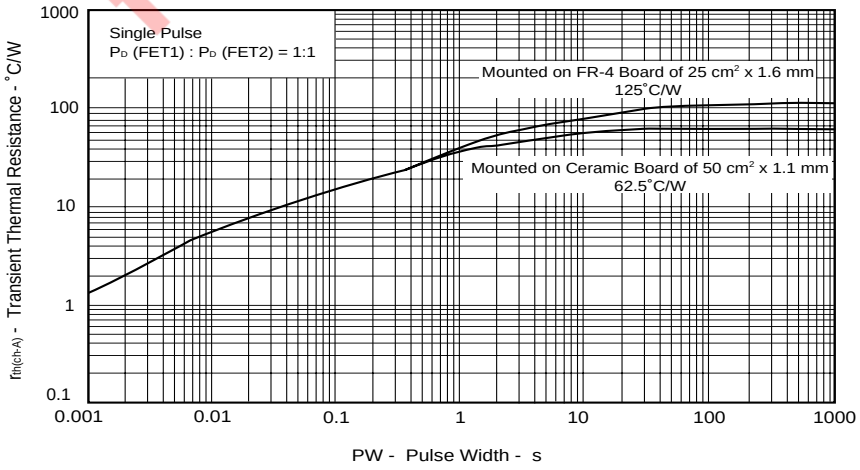

Not recommend for new design

Downloaded from Arrow.com.

[MEMO]

Not recommend for new design

Downloaded from Arrow.com.

[MEMO]

Not recommend for new design

Downloaded from Arrow.com.

- **The information in this document is current as of December, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
  "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
  "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
  "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
  "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
  The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
  (Note)
  (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
  (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4

Not recommend for new design

Downloaded from Arrow.com.