

Report NO:15E010013

GENE-BT04

Intel Bay Trial SOC Platform GENE Board

Board Level Product P5 Test Report

Summary	☒ Pass			
	☐ Fail			
	☐ Pass with Deviation (Comment: _____)			
Test Results Category				
	Critical	Major	Minor	Enhancement
Defect Found	0	0	0	0
Defect Unsolved	0	0	0	0

Issue date

2015/07/29

Approval

KJ Wang

Test Engineer

Aslen Hsieh

Summary Table of DTS:

Defect No.	Severity	Description

Version Released Records

Date	Version	Change History	Note
2010/04/21	P3-1001	1. Re-composing test Items	
2010/06/01	P2P3-1001	1. New Test Report	
2010/06/21	P2P3-1002	1. Add BIOS -> SPI ROM Setting (South Bridge - GPIO)	
2010/12/02	P2P2-1003	1. New Test Report	
2011/02/23	P2P3-1101	1. Re-composing test Items	
2011/03/04	P2P3-1102	1. Add Specification Validation	
2012/05/29	P2P3-1201	1. Add Summary Table of DTS	
2013/12/6	P2P3-1301	1. Rename document : [Board Level Product P2-P3 Verification Test Plan & Report Template] 2. Chapter1:Memory compatibility add AAEON P/N 3. Chapter1:Add CFast and m-SATA test item. 4. Chapter3:Add RS422 1.2KM/115200bps transmission test 5. Chapter3:BurninTest test add USB2.0/3.0. 6. Chapter5: Modify power consumption test item. 7. Chapter7: add Windows XP Professional English Version 32/64Bit and Windows 8 Pro English Version 32/64Bit test. 8. Chapter8: Change BIOS format from Award to AMI and add Hi-Safe, Hi-Manager test item. 9. Chapter9: Add SATA performance test and USB3.0 performance. 10. Remove Chapter10: Other Tests..	
2014/10/03	P2P3-1401	1. Page 1 rename: Board Level Product P2-P3 Test Report. 2. Remove platform information\test item and add driver folder item. 3. Chapter2.1: add EDID check, DOS display, 3840*2160, hot plug. 4. Chapter2.2: modify from "dual display test" to "Multi display test." 5. Remove chapter 2.3 "Boot ROM to Novell 4.11 [RPL]" item 6. Chapter2.3.2: add "CPU information" 7. Chapter2.4: change from optional function to "Jumper and connector function test" 8. Chapter3.4: RS422/485 add test from G3 status. 9. Add chapter 4.10 Display port converter compatibility test. 10. Chapter7.1: remove "halt" test item. 11. Chapter7.2/7.3/7.4: add touch and TPM function test 12. Chapter9: update performance test program. 13. Add chapter 10. Negative Test.	

Note :

For all test items in this report, 3 results have been defined and described as following:

Pass: Functionality work perfectly
Fail: Functionality failed and must be resolved in the next version
N/A: Functionality Not Applicable or Not Available

This test report would be updated when re-test completed in product next change version.

Specification Validation

Main Specification

Item		Specification	Result			Note
			Pass	Fail	N/A	
Form Factor		3.5" GENE Board – 146mm x 101.6mm	☒	☐	☐	
Processor		Intel Bay Trail Quad core N2807/J1900 SOC processor (4.3W/10W) 1.58/2.0GHz	☒	☐	☐	
System Memory		DDR3L SO-DIMM slot x1, Max up to 4GB RAM	☒	☐	☐	
Chipset		Intel Bay Trail Dual core N2807/J1900 SOC processor	☒	☐	☐	
VGA/LCD Controller	Chip	Intel Bay Trail Dual/Quad core N2807/J1900 SOC processor	☒	☐	☐	
	HDMI	HDMI up to 2560 x 1200	☒	☐	☐	
Super I/O		Fintek 81801U	☒	☐	☐	
Ethernet		Intel LAN i211AT x4/2 Gigabit Ethernet, RJ-45 x 4/2	☒	☐	☐	
Storage		1 x CFast 1 x SATA (optional)	☒	☐	☐	
Audio		N/A	☒	☐	☐	
Serial Port		1 x COM (RS-232)	☒	☐	☐	
Digital I/O		1 x DIO 4bit (2in, 2out) with box pin header	☒	☐	☐	
K/B and Mouse		One K/B and Mouse internal connector	☒	☐	☐	
Universal Serial Bus		1 x USB3.0 Support 900mA 2 x USB2.0 Total support 1.0A	☒	☐	☐	
Expansion Interface		1 x Mini Card (for USB only) 1 x DIO 4bit (2in, 2out) with box pin header 1 X LPC	☒	☐	☐	
Watchdog Timer		1~255 step by software program	☒	☐	☐	
Hardware Monitor		Monitoring system temperature, voltage status	☒	☐	☐	
Switch		1 x Power Switch w/LED P/N:1601613200	☒	☐	☐	
DC-IN		1 x DC-IN lockable connector P/N:1652503209	☒	☐	☐	
Power Requirement		1 x DC-IN lockable connector P/N:1652503209. DC 12V & ATX mode 1x Power Switch on board P/N: 1601613200	☒	☐	☐	

O.S. Support

Old support

Item	Specification	Result			Note
		Pass	Fail	N/A	
Microsoft Windows	Windows 7 English 32/64 Bit	☒	☐	☐	
	Windows 8 English 32/64 Bit	☒	☐	☐	
Linux	LINUX Kernel 2.6	☒	☐	☐	

Environmental Specifications

Item	Specification
Operating temperature	0°C ~ 60°C
Storage Temperature	-40~176°F (-40~80°C)
Operating Humidity	0~90% relative humidity, non-condensing
Vibration	N/A
Shock	N/A
Drop	N/A
EMI	Pre-Scan only (by CE & FCC Class A)

Note: Please refer Environment Test Report for detail information

Platform Information

Item	Device Information	Note
Product of department	ECD	
PCB Model / Version	GENE-BT04 REV A1.0	
CPU Board	GENE-BT04	
BIOS / Version	GENE-BT04 R1.0 (GBT4AM10) (07/01/2015)	
Driver folder	SAP-BETA (\\nas3):\Products\GENE-BT04	
CPU Type	Intel® Celeron® Processor J1900 / 1.99GHz (2M Cache, up to 2.42 GHz) Intel® Celeron® Processor N2807 / 1.58GHz (1M Cache, up to 2.16 GHz)	
Memory Type	Innidisk / SEC K4B4G 0846D / DDR3L-1600 / 4GB	
SATA HDD	HGST HTS725050A 2.5" 7200rpm SATAIII 500GB	
CFast	Innidisk / CFast3ME / 64GB	
USB DVD-ROM	BUFFALO BDXL-PC6U2	
LCD Monitor	LG Flatron E2260 / 1920*1080 / 22" monitor Asus PA238Q / 1920*1080 / 23" monitor BENQ BL2710 / WQHD 2560 x 1440 / 27" monitor	
Operating System	☒ Linux English U buntu14.04 Kernel 3.13.0 -32 -generic-pae #57 ☒ Windows 7 Ultimate SP1 English Version 32/64 Bit ☒ Windows 8.1 Enterprise English Version 32/64Bit	
Power Supply	DC Adapter : FSP / FSP060-DBAB1 / 12V= 5.0A MAX (60W MAX)	
Chipset Information		
North Bridge	Intel Bay Trail Dual core N2807/J1900 SOC processor	
South Bridge	Intel Bay Trail Dual core N2807/J1900 SOC processor	
Super IO Chipset	Fintek 81801U	
VGA Chipset	Intel Chipset Device Utility 10.0 (04/24/2014)	
Audio Chipset	Intel Atom Processor E3800 Series/Intel Celeron Processor 37.15.0.1127 (04/20/2015) Intel Display Audio 6.16.0.3150 (7/8/2014)	
Ethernet Chipset	Intel I211 Gigabit Network Connection 12.11.97.0 (3/11/2014)	

Summary Table of contents:

1. Hardware Test	8
1.1. CPU Compatibility Test	8
1.2. Memory Compatibility Test.....	8
1.3. SATA Compatibility Test	8
2. Basic Function Test.....	9
2.1. Video Function Test	9
2.2. Audio Function Test	11
2.3. LAN Function Test	11
2.4. Jumper and Connector Function Test.....	14
3. Integration Test.....	15
3.1. USB Port Integration Test	15
3.2. Digital I/O Port Test.....	15
3.3. COM Port Integration Test	15
3.4. RS-422 / RS-485 Test.....	15
4. Application Test.....	16
4.1. PCI Slot Function (PCI Adapter Card) Test	16
4.2. PCI-Express Function Test.....	16
4.3. Mini PCI Card Compatibility Test	16
4.7. SSD Modules Compatibility Test	16
4.8. Peripheral Compatibility- Storage Device Test	16
4.10. Display port Converter Compatibility Test.....	16
5. Power Consumption Test	17
5.1. AT/ATX Power Consumption	17
5.2. PC Health Status	17
6. Time Accuracy Test.....	19
6.1. System Clock & RTC Clock Test.....	19
6.2. Booting Timer Test	19
6.3. Watchdog Timer Test	19
7. O.S. Compatibility Test	20
7.1. English Ubuntu 14.04 Kernel 3.13.0-24-generic	20
7.2. Windows XP Professional English Version 32/64Bit	21
7.3. Windows 7 Ultimate English Version 32/64Bit	21
7.4. Windows 8.1 Enterprise English Version 32/64Bit	22
8. BIOS Function Test	23
8.1. Advanced Test	23
8.2. Chipset Test.....	24
8.3. Boot Test	24
8.4. CMOS Backup / Clear CMOS Test	24
8.5. AAEON Tag Check Utility.....	24
8.6. Supervisor / User Password Test	24
8.7. Hi-safe Test.....	25
9. Performance Test	26
10. Negative Test	29
10.1 USB Keyboard Negative Test.....	29
10.2 Power Supply Negative Test	29
10.3 Suspend S3 Negative Test.....	29

1. Hardware Test

1.1. CPU Compatibility Test

CPU Information	Result			Note
	Pass	Fail	N/A	
Intel® Celeron® Processor J1900 / 1.99GHz (2M Cache, up to 2.42 GHz)	☒	☐	☐	
Intel® Celeron® Processor N2807 / 1.58GHz (1M Cache, up to 2.16 GHz)	☒	☐	☐	

1.2. Memory Compatibility Test

Memory Information	AAEON P/N	MEM V5.01 For 3 loops			Note
		Pass	Fail	N/A	
Innidisk / SEC K4B2G0846Q / DDR3L-1600 / 2GB	968D3002GX	☒	☐	☐	MemTest86 V5.01
Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB	968D3004GZ	☒	☐	☐	MemTest86 V5.01
Innidisk / SEC K4B4G0846D / DDR3L-1600 / 8GB	968D3008GW	☒	☐	☐	MemTest86 V5.01
Transcend / SEC K4B2G0846Q / DDR3L-1600 / 2GB	968D3002GK	☒	☐	☐	MemTest86 V5.01
Transcend / SEC K4B4G0846D / DDR3L-1600 / 4GB	968D3004G6	☒	☐	☐	MemTest86 V5.01
Transcend / SEC K4B4G0846D / DDR3L-1600 / 8GB	968D3008G7	☒	☐	☐	MemTest86 V5.01

1.3. SATA Compatibility Test

1.3.1 Onboard SATA (IDE) Test

SATA Device Information	Result			Note
	Pass	Fail	N/A	
HGST HTS725050A 2.5" 7200rpm SATAIII 500GB	☒	☐	☐	Windows7_64bit

1.3.2 Onboard SATA (AHCI) Test

SATA AHCI Test	Result			Note
	Pass	Fail	N/A	
TOSHIBA MK1665GSX 2.5" 5400rpm SATAII 160GB	☒	☐	☐	
WD WD5000BPKX / 500GB 7200 RPM / 16MB Cache / SATA 6.0Gb/s / 2.5" SATA HDD	☒	☐	☐	Windows8_32bit

1.4. CFast Compatibility Test

CFast Information	P/N	ATTO R/W			Note
		Pass	Fail	N/A	
Innidisk / CFast3ME / 8GB	DECFA-08GD07RC2SC-26	☒	☐	☐	Ubuntu14.04
Innidisk / CFast3ME / 16GB	DECFA-16GD07RC2DC-26	☒	☐	☐	
Innidisk / CFast3ME / 32GB	DECFA-32GD07RC2DC-26	☒	☐	☐	Windows8_64bit
Innidisk / CFast3ME / 64GB	DECFA-64GD07RC2DC-26	☒	☐	☐	Windows7_32bit
Innidisk / CFast3ME / 128GB	DECFA-A28GD07RC2DC-26	☒	☐	☐	Windows8_32bit

2. Basic Function Test

2.1. Video Function Test

2.1.1. Single Output Function Test

Hardware Information with Windows 7 Ultimate English Version 32 Bit Driver Version										
CPU	Intel® Atom CPU J1900 / 1.99GHz									
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB									
SATA HDD	Innidisk / CFast3ME / 64GB									
HDMI	Asus / PA238Q / 23" LCD monitor / 1920*1080 LG Flatron E2260 / 1920*1080 / 22" monitor BENQ / BL2710 / 27" LCD monitor / 2560*1440									
LVDS port	N/A									
Color Quality	☒ 16bit ☐ 24bit ☒ 32bit									
Resolution	HDMI 1			HDMI 2			LVDS			Note
	Pass	Fail	N/A	Pass	Fail	N/A	Pass	Fail	N/A	
640X480	☐	☐	☒	☐	☐	☒	☐	☐	☒	
800X600	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1024X768	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1152X864	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1280X600	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1280X720	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1280X768	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1280X800	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1280X960	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1280X1024	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1360X768	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1366X768	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1400X1050	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1440X900	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1600X900	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1600X1200	☐	☐	☒	☐	☐	☒	☐	☐	☒	
1680X1050	☒	☐	☐	☒	☐	☐	☐	☐	☒	
1792X1344	☐	☐	☒	☐	☐	☒	☐	☐	☒	
1856X1392	☐	☐	☒	☐	☐	☒	☐	☐	☒	
1920X1080	☒	☐	☐	☒	☐	☐	☒	☐	☐	
1920X1200	☐	☐	☒	☐	☐	☒	☐	☐	☒	
1920X1440	☐	☐	☒	☐	☐	☒	☐	☐	☒	
2048X1152	☐	☐	☒	☐	☐	☒	☐	☐	☒	
2560X1440	☐	☐	☒	☐	☐	☒	☐	☐	☒	
3840 X 2160	☐	☐	☒	☐	☐	☒	☐	☐	☒	
EDID check	☒	☐	☐	☒	☐	☐	☐	☐	☒	
Hot plug	☒	☐	☐	☒	☐	☐	☐	☐	☒	
Rotation(0/90/180/270)	☒	☐	☐	☒	☐	☐	☐	☐	☒	
DOS Display	☒	☐	☐	☒	☐	☐	☐	☐	☒	

Note: Pay attention to Full Screen under POST screen and Text Mode.

2.1.2. Multi-Display Output Test

Selection	Output	Result			Note
		Pass	Fail	N/A	
Dual Display Clone	HDMI 1 +HDMI 2	☒	☐	☐	
Extended Desktop		☒	☐	☐	

2.1.3. Video Resolution Test

Test points:

1. Power on without inserting any VGA connector until system reaches Windows desktop
2. Plug VGA connector into test machine while system reaches Windows then check VGA driver and display
3. Check VGA output Brightness is normal and it shows "Ghost Image" / "Flicker" or not

	Result			Note
	Pass	Fail	N/A	
In Windows Desktop	☒	☐	☐	

2.1.4. Video Resolution Test

LVDS Model		Result			Note
		Pass	Fail	N/A	
LVDS	1_AUO G065VN01 V.0 / 6.5" / 640x480 / 18bit (4:3)	☐	☐	☒	
	2_AUO G065VN01 V.0 / 6.5" / 640x480 / 24bit (4:3)	☐	☐	☒	
	3_Data Image 7" / 800*480 / 18bit (16:9)	☐	☐	☒	
	4_AU G084SN05 V.3 / 8.4" / 800*600 / 18bit (4:3)	☐	☐	☒	
	5_AU B104SN02 V.0 / 10.4" / 800*600 / 18bit (4:3)	☐	☐	☒	
	6_AUO G084SN05 v7 / 8.4" / 800*600 / 24bit (4:3)	☐	☐	☒	
	7_AU G120XN01 V.0 / 12.1" / 1024*768 / 18bit (4:3)	☐	☐	☒	
	8_AU M150XN07 V.2 / 15" / 1024x768 / 24bit (4:3)	☐	☐	☒	
	9_Toshiba /12.1"/1280 x 768 x 18bit (16:9)	☐	☐	☒	
	10_AU M170EG01 V.D/ 17" / 1280*1024 / 48bit (4:3)	☐	☐	☒	
	11_AU M170XW01 V.1 / 17" / 1280x768 / 24bit (16:9)	☐	☐	☒	
	12_AUO T260XW02 / 26" / 1366x768 / 24bit	☐	☐	☒	
	13_AU M201UN02 V.5 / 20.1" / 1600x1200x48bit	☐	☐	☒	
	14_AUO T370HW01 / 37" / 1920x1080 / 48bit	☐	☐	☒	
	15_AUO M215HW03 V1 / 21" / 1920*1080 / 48bit	☐	☐	☒	

2.2. Audio Function Test

[] No Support

Function Test		Result			Note
		Pass	Fail	N/A	
Intel Display Audio (HDMI)		☒	☐	☐	
L (Left) Channel		☐	☐	☒	
R (Right) Channel		☐	☐	☒	
CD_In		☐	☐	☒	
Line In		☐	☐	☒	
MICROPHONE		☐	☐	☒	
Amplifier R-channel output		☐	☐	☒	
Amplifier L-channel output		☐	☐	☒	
6-channel mode for 5.1 speaker output		☐	☐	☒	
8-channel mode for 7.1 speaker output		☐	☐	☒	
S/P DIF function Test	Input	☐	☐	☒	
	Output	☐	☐	☒	

2.3. LAN Function Test

[] No Support

Connect two computers via different speed LAN HUB by using "Ping" instruction (1000 times) Command: ping xxx.xxx.xx.xx -l 65500 -n 1000															
1000Mbps LAN HUB				D-Link DGS-1008D											
100Mbps LAN HUB				Accton Desktop-3005											
10Mbps LAN HUB				SVEC FD916H											
OnBoard LAN1		Intel I211 Gigabit LAN						MAC Address				00-07-32-32-72-09			
OnBoard LAN2		Intel I211 Gigabit LAN						MAC Address				00-07-32-32-72-0A			
OnBoard LAN3		Intel I211 Gigabit LAN						MAC Address				00-07-32-32-72-0B			
OnBoard LAN4		Intel I211 Gigabit LAN						MAC Address				00-07-32-32-72-0C			
LAN Speed	Link / Speed LED	Active LED	LAN 1			LAN 2			LAN 3			LAN 4			Note
			Pass	Fail	N/A	Pass	Fail	N/A	Pass	Fail	N/A	Pass	Fail	N/A	
1000Mbps			☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	
100Mbps			☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	
10Mbps			☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	
Wake On LAN			☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	
LAN Boot (PXE)			☒	☐	☐	☒	☐	☐	☐	☐	☒	☐	☐	☒	
Internet Browser (DHCP Server)			☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	

2.3.2. Throughput Test

DUT Platform Information:

☐	Fedora 15
☐	Cent 5.5
☒	Ubuntu 14.04 Kernel 3.13.0-32-generic-pae #57
☐	Red Hat

Note : Connection-Level Performance (Interaction Constants Duration Time Set to 60 Sec.)


Graphics Media	System default
LAN	System default
Audio Driver	Intel I211 Gigabit Network Connection / igb-4.1.2
CPU information	Intel® Atom CPU E3845 1.91GHz

SMB Platform Information:

Chassis	SPIRENT Smartbits 600B
Chassis Version	2.80.003 (Cur) 2.50.000
Chassis Serial #	06014047
Library	6.00-29
API	5.50.42.01
File	0550042
Module	2 * LAN-3324A SmartMetrics XD 4-Port 10/100/1000Base-T Gigabit Ethernet
Test Software	SmartFlow5.50.42.1

Test Result:


1. Half Direction (LAN1: Intel I211 Gigabit Network → LAN2: Intel I211 Gigabit Network)

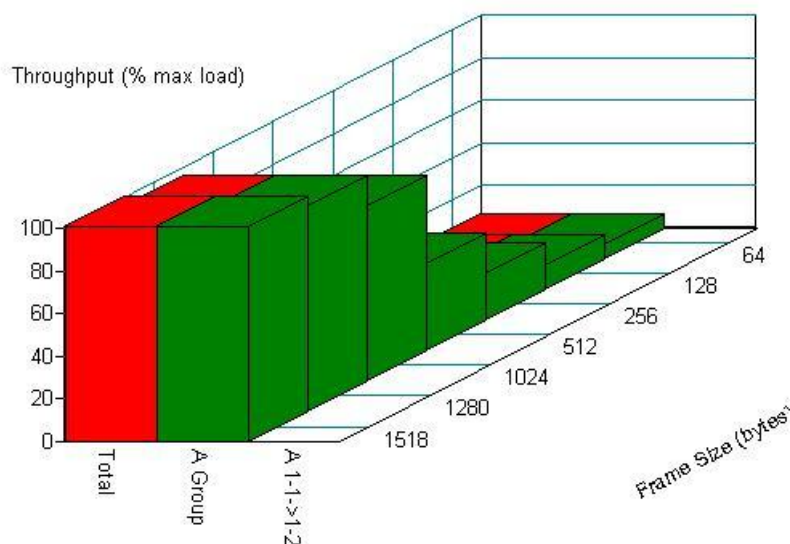

Throughput vs Frame Size

Name/Framesize	<u>64</u>	<u>128</u>	<u>256</u>	<u>512</u>	<u>1024</u>	<u>1280</u>	<u>1518</u>
Total	6.4140625	11.0546875	21.109375	40.4453125	81.4375	96.1328125	100
A Group	6.4140625	11.0546875	21.109375	40.4453125	81.4375	96.1328125	100
A 1-1->1-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A


2. Half Direction (LAN3: Intel I211 Gigabit Network → LAN4: Intel I211 Gigabit Network)

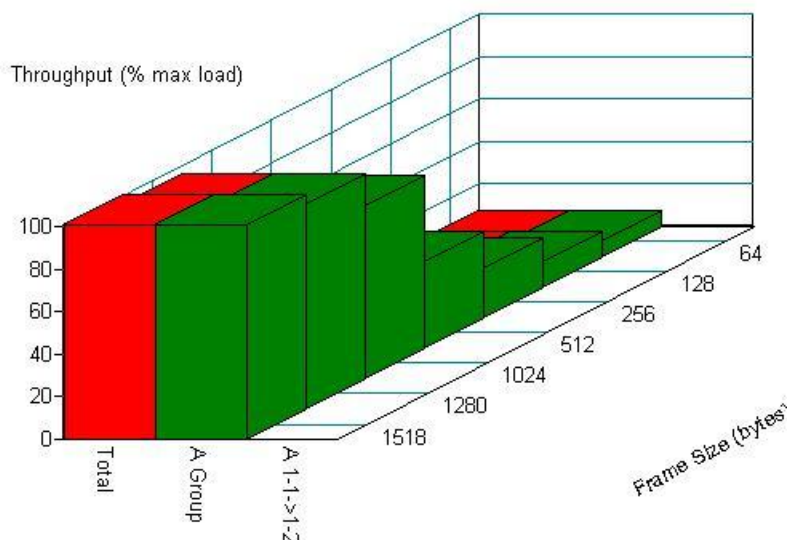

Throughput vs Frame Size

<u>Name/Framesize</u>	<u>64</u>	<u>128</u>	<u>256</u>	<u>512</u>	<u>1024</u>	<u>1280</u>	<u>1518</u>
Total	7.1875	11.828125	22.65625	40.4453125	80.6640625	96.1328125	100
A Group	7.1875	11.828125	22.65625	40.4453125	80.6640625	96.1328125	100
A 1-1->1-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A

3. Binary Direction (LAN1: Intel I211 Gigabit Network ⇔ LAN2: Intel I211 Gigabit Network)

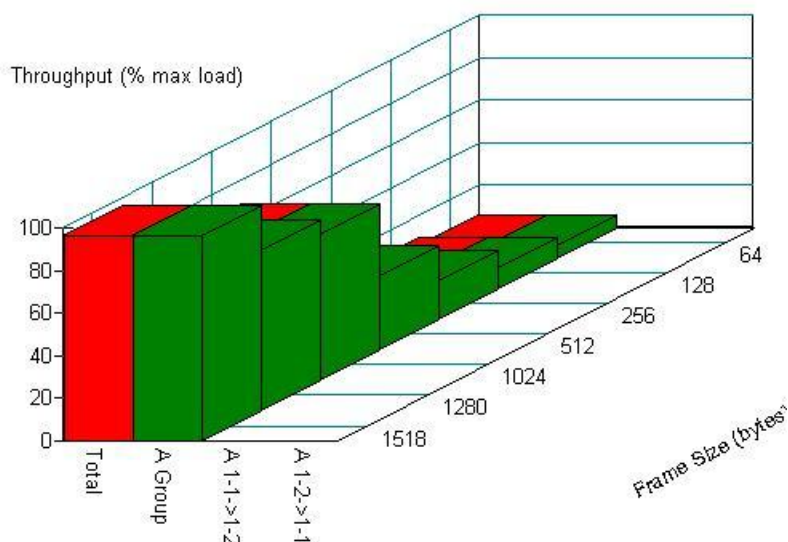


Throughput vs Frame Size

<u>Name/Framesize</u>	<u>64</u>	<u>128</u>	<u>256</u>	<u>512</u>	<u>1024</u>	<u>1280</u>	<u>1518</u>
Total	5.640625	9.5078125	18.015625	34.2578125	68.2890625	74.4765625	96.1328125
A Group	5.640625	9.5078125	18.015625	34.2578125	68.2890625	74.4765625	96.1328125

A 1-1->1-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A 1-2->1-1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

4. Binary Direction (LAN3: Intel I211 Gigabit Network ⇔ LAN4: Intel I211 Gigabit Network)

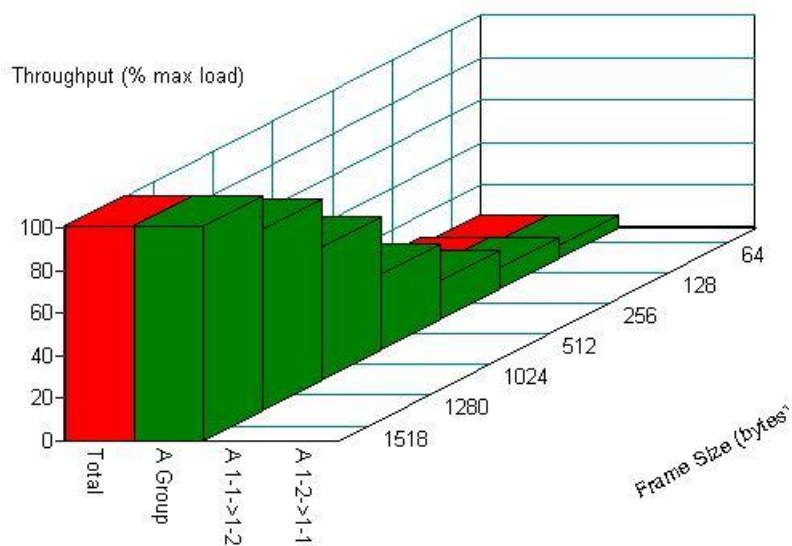

Throughput vs Frame Size

<u>Name/Framesize</u>	<u>64</u>	<u>128</u>	<u>256</u>	<u>512</u>	<u>1024</u>	<u>1280</u>	<u>1518</u>
Total	5.640625	9.5078125	18.015625	35.03125	62.1015625	84.53125	100
A Group	5.640625	9.5078125	18.015625	35.03125	62.1015625	84.53125	100
A 1-1->1-2	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A 1-2->1-1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

2.4. Jumper and Connector Function Test

[] No Support

Function Test	Result			Note
	Pass	Fail	N/A	
Clear CMOS Jumper (JP12_1,3,5)	☒	☐	☐	
Auto Power Button Enable/Disable Selection (JP12_2,4,6)	☒	☐	☐	

3. Integration Test

	Hardware Information with Windows 7 Ultimate English SP1 32 Bit Driver Version
CPU	Intel® Atom CPU J1900 / 1.99GHz
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB
HDD/CFD	Innidisk / CFast3ME / 64GB

3.1. USB Port Integration Test

Test Item	USB Port	Boot			Function(Win 7)			Note
		Pass	Fail	N/A	Pass	Fail	N/A	
USB HDD		☒	☐	☐	☒	☐	☐	
USB FDD Mitsumi D353GUE		☒	☐	☐	☒	☐	☐	
BUFFALO BRXL-PC6U2		☒	☐	☐	☒	☐	☐	
USB Hub Test (Connect USB Device) HUB Port1: USB Keyboard / HUB Port2: USB Mouse / HUB Port3: USB HDD								
ATake / 4 Port USB 2.0 HUB		☒	☐	☐	☒	☐	☐	
Transend HUB3 / 4 Port USB 3.0 HUB		☒	☐	☐	☒	☐	☐	

3.2. Digital I/O Port Test

DIO Address (____)	Result			Note
	Pass	Fail	N/A	
DIO VCC +5V	☒	☐	☐	DIO 4bit (2in, 2out)

3.3. COM Port Integration Test

Test Item	Result			Note
	Pass	Fail	N/A	
Serial Modem Dial Out	☒	☐	☐	
Serial Modem Ring In	☒	☐	☐	Test by Modem
Serial Modem +12V	☐	☐	☒	Test by Multimeter
Serial Modem +5V	☐	☐	☒	Test by Multimeter

3.4. RS-422 / RS-485 Test

Test Item	Result			Note
	Pass	Fail	N/A	
RS-422 for COM3	☐	☐	☒	Use loopback and WINSSD.exe to test RS-422 in Windows
	☐	☐	☒	1. The communication between the RS-422 port of two boards is linked by one 1.2km cable on Windows Terminal. 2. Confirm RS422 can work properly from G3 status
RS-485 for COM3	☐	☐	☒	Use ICP CON I-7044D D/IO Module in Windows(Support Auto flow control)
	☐	☐	☒	1. The communication between the RS-485 port of two boards is linked by one 1.2km cable on Windows Terminal 2. Confirm RS485 can work properly from G3 status

4. Application Test

4.1. PCI-Express Function Test

Mini PCI Express Card	Function Test			Note
	Pass	Fail	N/A	
Ralink RT2571WF WLAN Mini Card (USB Interface)	☒	☐	☐	CN13

4.2. SSD Modules Compatibility Test

SSD HDD Compatibility Test:

Cable Type: ☐ IDE ☐ SATA2 ☒ MLC ☐ SLC

Test Item	Result			Note
	Pass	Fail	N/A	
Intel SSD 530 Series 120GB SATA III	☒	☐	☐	

4.3. Display port Converter Compatibility Test

Test Item			Result			Note
			Pass	Fail	N/A	
DP to HDMI converter: LPC-1504	DOS display	Full screen	☐	☐	☒	
	OS display	Full screen	☐	☐	☒	Max resolution:
DP to DVI converter: LPC-1503	DOS display	Full screen	☐	☐	☒	
	OS display	Full screen	☐	☐	☒	Max resolution:

5. Power Consumption Test

	Hardware Information with Windows 7 Ultimate English SP1 32 Bit Driver Version
CPU	Intel® Atom CPU N2807 / 1.58GHz
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB
HDD/CFD	Innidisk / CFast3ME / 64GB

5.1. AT/ATX Power Consumption

Test Equipment						
Equipment	Digital Multimeter					
Manufacturer	HOLA					
Model name	DM-1240					
Test Environment						
ATX Power Model	FSP / FSP060-DBAB1 / 12V= 5.0A MAX (60W MAX)					
Power Supply		DC Power				Note
(Full Loading Mode) Windows 7 with Prime 95 Full Loading Test	(+12V)	0.65	A	7.80	W	Prime95 Version 259
Full Loading Total Watt	7.80 (W)					
S3 mode: Measure the current value when system in S3 mode of windows and without running any	(+12V)	0.05	A	0.6	W	
Suspend Total Watt	0.6 (W)					
Win. Idle mode: Measure the current value when system in windows mode and without running any program	(+12V)	0.42	A	5.04	W	
Idle Total Watt	5.04 (W)					
S5 mode: Measure the current value when system in S5 mode of windows and without running any	(+12V)	0.06	A	0.72	W	Erp disable
Suspend Total Watt	0.72 (W)					
S5 mode: Measure the current value when system in S5 mode of windows and without running any	(+12V)	N/A	A	N/A	W	Erp Enable
Suspend Total Watt	N/A (W)					

5.2. PC Health Status

Test Point: The value between Actual Voltage and Voltage Monitor must be + /- 5%

Voltage Monitoring Test	Result			BIOS (V)		Actual (V)		Note
	Pass	Fail	N/A					
CPU Temperature	☒	☐	☐	61°C		6°C		
System Temperature	☒	☐	☐	59°C		59°C		
Fan1 Speed	☒	☐	☐	NA	RPM	NA	RPM	
Vcore	☒	☐	☐	0.840 V		0.72V		
VMEM	☒	☐	☐	1.352V		1.34V		
+3.3V	☒	☐	☐	3.296V		3.32V		
3VSB	☒	☐	☐	3.328V		3.32V		
VBAT	☒	☐	☐	3.184V		3.18V		

5.4. CMOS Battery Test

Test Point: Calculated result should be > 5 years.

Battery: CR2032

Capacity 225mA

Check item	Measured Voltage		Measured Current		Calculate Result		Result			Note
							Pass	Fail	N/A	
Battery leakage	3.1	V	1.7	uA	15.1	years	☒	☐	☐	

Calculate result=225mA/measured current / 365days/24hours

6. Time Accuracy Test

6.1. System Clock & RTC Clock Test

Under Room Temperature: 26 °C

Function	Item	Time Interval	Criteria	Actual	Result			Note
					Pass	Fail	N/A	
RTC Clock in Power On Mode		24 hrs	+/- 2 sec	+2 Sec	☒	☐	☐	
RTC Clock in Power Off Mode		24 hrs	+/- 2 sec	+2 Sec	☒	☐	☐	

6.2. Booting Timer Test

Installation	Actual		Note
System Booting Time	2.7	Sec	Press the Power Button till "Beep" Sound appears

6.3. Watchdog Timer Test

Use Function as below: **Hi-Safe v20150422**

[] No Support.

Time-Out Interval	Criteria	Actual		Result			Note
				Pass	Fail	N/A	
10 sec	+/- 10%	10.9	Sec	☒	☐	☐	
60 sec	+/- 10%	60.2	Sec	☒	☐	☐	
255 sec	+/- 10%	263.4	Sec	☒	☐	☐	

Note : Under Room Temperature: 26°C

7. O.S. Compatibility Test

7.1. English Ubuntu 14.04 Kernel 3.13.0-32-generic-pae #57

[] No Support

Driver Information:

Chipset Software	System default
Graphics Media	System default
Audio Driver	System default
LAN Driver	Intel I211 Gigabit Network Connection / e1000e-3.1.0.2

Install OS to IDE HDD/SATA HDD/ CF Card:

Installation	Result			Note
	Pass	Fail	N/A	
English Ubuntu14.04 Kernel 3.13.0 -32 -generic- pae #57	☒	☐	☐	Type uname -a

Test Result:

Test Result:

Test Item	Result			Note
	Pass	Fail	N/A	
Display Function Test				
HDMI 1 -- Full Screen	☒	☐	☐	
HDMI 2 -- Full Screen	☒	☐	☐	
Network Function Test				
Connect to Internet – LAN 1	☒	☐	☐	
Connect to Internet – LAN 2	☒	☐	☐	
Connect to Internet – LAN 3	☒	☐	☐	
Connect to Internet – LAN 4	☒	☐	☐	
Audio Function Test				
Play Audio Function Test	☐	☐	☒	Play Audio Test
Base Function Test				
Mouse Test	☒	☐	☐	
Keyboard Test	☒	☐	☐	
USB DVD-ROM	☒	☐	☐	
USB 2.0 Removable Devices	☒	☐	☐	
USB 3.0 Removable Devices	☒	☐	☐	
X Windows Application				
Start Button Office	☒	☐	☐	Office function
X-Window	☒	☐	☐	Startx – Desktop in Linux
Command Test On Text Mode: Attention Delay Phenomenon				
uname -a	☒	☐	☐	Show information
Shutdown	☒	☐	☐	Init 0 or shutdown -h now
Restart the Computer	☒	☐	☐	Init 6 or shutdown -r now
ls / clear; cd /dev /ls -l	☒	☐	☐	Command instruction

7.2. Windows 7 Ultimate English Version 32/64Bit

[] No Support

[X] x32 Driver Information:

Chipset Software	Intel Chipset Device Utility 10.0 (04/24/2014)
Graphics Media	Intel Atom Processor E3800 Series/Intel Celeron Processor 37.15.0.1127 (04/20/2015)
Audio Driver	Intel Display Audio 6.16.0.3150 (7/8/2014)
LAN Driver	Intel I211 Gigabit Network Connection 12.11.97.0 (3/11/2014)

[X] x64 Driver Information:

Chipset Software	Intel Chipset Device Utility 10.0 (03/26/2014)
Graphics Media	Intel Atom Processor E3800 Series/Intel Celeron Processor 37.15.0.1127 (04/20/2015)
Audio Driver	Intel Display Audio 6.16.0.3150 (7/8/2014)
LAN Driver	Intel I211 Gigabit Network Connection 12.11.97.0 (3/11/2014)

Install OS to IDE HDD/SATA HDD/ CF Card:

Installation	Result			Note
	Pass	Fail	N/A	
English Windows 7 Ultimate ACPI Mode	☒	☐	☐	

Test Results:

Test Item	Result			Note
	Pass	Fail	N/A	
Single Display				
HDMI 1 -- Full Screen	☒	☐	☐	
HDMI 2 -- Full Screen	☒	☐	☐	
Boot - Windows 7 Ultimate Advanced Options Menu				
Safe Mode	☒	☐	☐	
Basic Function Test				
PS/2 Mouse and Keyboard	☒	☐	☐	
USB Mouse and Keyboard	☒	☐	☐	
COM Port Mouse detect	☒	☐	☐	
USB 2.0 Removable Devices	☒	☐	☐	
USB 3.0 Removable Devices	☒	☐	☐	
LAN Function Test				
LAN1 --- Auto	☒	☐	☐	
LAN2 --- Auto	☒	☐	☐	
Connect to Internet – LAN 3	☒	☐	☐	
Connect to Internet – LAN 4	☒	☐	☐	
Audio Function Test				
Line Out Test	☐	☐	☒	
Line In Test	☐	☐	☒	
Microphone Test	☐	☐	☒	
Start Menu				
Log off User	☒	☐	☐	
Shut down (S5)	☒	☐	☐	
Standby / Sleep (S3)	☒	☐	☐	
Restart	☒	☐	☐	
Hibernate (S4)	☒	☐	☐	

7.3. Windows 8.1 Enterprise English Version 32/64Bit

[] No Support

[X] x32 Driver Information:

Chipset Software	Intel Chipset Device Utility 10.0 (03/26/2014)
Graphics Media	Intel HD Graphics 10.18.10.3958 (9/30/2014)
Audio Driver	Intel Display Audio 6.16.0.3154 (9/9/2014)
LAN Driver	Intel I211 Gigabit Network Connection 12.11.97.0 (3/11/2014)

[X] x64 Driver Information:

Chipset Software	Intel Chipset Device Utility 10.0 (03/26/2014)
Graphics Media	Intel HD Graphics 10.18.10.3958 (9/30/2014)
Audio Driver	Intel Display Audio 6.16.0.3154 (9/9/2014)
LAN Driver	Intel I211 Gigabit Network Connection 12.11.97.0 (3/11/2014)

Install OS to IDE HDD/SATA HDD/ CF Card:

Installation	Result			Note
	Pass	Fail	N/A	
English Windows8.1 Enterprise	☒	☐	☐	

Test Results:

Test Results:

Test Item	Result			Note
	Pass	Fail	N/A	
Single Display				
HDMI 1 -- Full Screen	☒	☐	☐	
HDMI 2 -- Full Screen	☒	☐	☐	
Boot – Windows8.1 Enterprise Advanced Options Menu				
Safe Mode	☒	☐	☐	
Basic Function Test				
PS/2 Mouse and Keyboard	☒	☐	☐	
USB Mouse and Keyboard	☒	☐	☐	
COM Port Mouse detect	☒	☐	☐	
USB 2.0 Removable Devices	☒	☐	☐	
USB 3.0 Removable Devices	☒	☐	☐	
LAN Function Test				
LAN1 --- Auto	☒	☐	☐	
LAN2 --- Auto	☒	☐	☐	
Connect to Internet – LAN 3	☒	☐	☐	
Connect to Internet – LAN 4	☒	☐	☐	
Audio Function Test				
Line Out Test	☐	☐	☒	
Line In Test	☐	☐	☒	
Microphone Test	☐	☐	☒	
Start Menu				
Log off User	☒	☐	☐	
Shut down (S5)	☒	☐	☐	
Sleep (S3)	☒	☐	☐	
Restart	☒	☐	☐	
Hibernate (S4)	☒	☐	☐	

8. BIOS Function Test

	Hardware Information with Windows 7 Ultimate English SP1 32 Bit Driver Version
CPU	Intel® Atom CPU J1900 / 1.99GHz
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB
HDD	Innidisk / CFast3ME / 64GB

8.1. Advanced Test

Test Item			Result			Note
			Pass	Fail	N/A	
ACPI settings	ACPI Sleeps state	S3 (Suspend to RAM)	☒	☐	☐	
		Suspend Disable	☒	☐	☐	
	Power Mode	ATX Type	☒	☐	☐	
		AT Type	☒	☐	☐	
	Restore AC Power Loss	Power on	☒	☐	☐	
		Power off	☒	☐	☐	
		Last State	☒	☐	☐	Power on/ Power off/ Last State
	ACPI Sleeps state	S3 (Suspend to RAM)	☒	☐	☐	
		Suspend Disable	☒	☐	☐	
	Wake on Ring		☒	☐	☐	Enabled/Disabled
	Wake system with Fixed Time		☒	☐	☐	Enabled/Disabled
	Wake system with Dynamic Time		☒	☐	☐	Enabled/Disabled
F81801 Super IO Configuration	Serial port1 Configuration		☒	☐	☐	RS-232
Hardware monitor			☒	☐	☐	
CPU Configuration	CPU information		☒	☐	☐	
IDE Configuration	Serial- ATA (SATA)		☒	☐	☐	Enabled/Disabled
	SATA Speed Support		☒	☐	☐	Gen1 / Gen2
	SATA Mode		☒	☐	☐	AHCI / IDE Mode
	SATA Port 0		☒	☐	☐	Enabled/Disabled
	SATA Port 0 HotPlug		☒	☐	☐	Enabled/Disabled
	SATA Port 1		☒	☐	☐	Enabled/Disabled
	SATA Port 1 HotPlug		☒	☐	☐	Enabled/Disabled
Dynamic Digital IO Configuration	Digital Pin1 (GP30) Direction		☒	☐	☐	Input / Output
	Digital Pin1 (GP30) Level		☒	☐	☐	Hi / Low
	Digital Pin2 (GP31) Direction		☒	☐	☐	Input / Output
	Digital Pin2 (GP31) Level		☒	☐	☐	Hi / Low
	Digital Pin3 (GP32) Direction		☒	☐	☐	Input / Output
	Digital Pin3 (GP32) Level		☒	☐	☐	Hi / Low
	Digital Pin4 (GP33) Direction		☒	☐	☐	Input / Output
	Digital Pin4 (GP33) Level		☒	☐	☐	Hi / Low
USB Configuration	Legacy USB Support		☒	☐	☐	Enabled/Disabled

8.2. Chipset Test

Test Item			Result			Note
			Pass	Fail	N/A	
North Bridge	Primary IGFX Boot Display	VBIOS Default	☒	☐	☐	
		HDMI 1	☒	☐	☐	
		HDMI 2	☒	☐	☐	
South Bridge	USB configuration	USB OTG Support	☐	☐	☒	PCI mode / Disabled
		XHCI	☒	☐	☐	Enabled/Disabled Auto/Smart Auto
		USB port 0	☒	☐	☐	Enabled/Disabled
		USB port 1	☒	☐	☐	Enabled/Disabled
		USB port 2	☒	☐	☐	Enabled/Disabled
		USB port 3	☒	☐	☐	Enabled/Disabled
	PCI Express Configuration	PCI Express port 0	☒	☐	☐	Enabled/Disabled
		PCI Express port 1	☒	☐	☐	Enabled/Disabled
		PCI Express port 2	☒	☐	☐	Enabled/Disabled
		PCI Express port 3	☒	☐	☐	Enabled/Disabled

8.3. Boot Test

Test Item	Result			Note
	Pass	Fail	N/A	
Quiet Boot	☒	☐	☐	Enabled/Disabled
PXE	☒	☐	☐	Enabled/Disabled
Boot From Hard Disk	☒	☐	☐	
Boot From CDROM	☒	☐	☐	
Boot From USB HDD	☒	☐	☐	
Boot From USB Floppy	☒	☐	☐	
Boot From USB CD-ROM	☒	☐	☐	
Boot from LAN	☒	☐	☐	
Disable	☒	☐	☐	

8.4. CMOS Backup / Clear CMOS Test

Test Item	Result			Note
	Pass	Fail	N/A	
CMOS Backup	☒	☐	☐	Clear Date and time
Clear CMOS Test	☒	☐	☐	Clear Date

8.5. AAEON Tag Check Utility

Test Item	Result			Note
	Pass	Fail	N/A	
Check AAEON BIOS OK	☒	☐	☐	AONCHECK.EXE

8.6. Supervisor / User Password Test

Test Item	Result			Note
	Pass	Fail	N/A	
Administrator Password	☒	☐	☐	
User Password	☒	☐	☐	

8.7. Hi-safe Test

Test Item		Result			Note
		Pass	Fail	N/A	
Version(1.2015.04.22)		☒	☐	☐	
System Information	CPU Information	☒	☐	☐	
	Model Name	☒	☐	☐	
	Display Information	☒	☐	☐	
	RAM Information	☒	☐	☐	
H/W Monitor	Info	☒	☐	☐	
	Fan Speed	☒	☐	☐	
	Temperature	☒	☐	☐	
	Voltage	☒	☐	☐	
DIO	DIO1~4 High	☒	☐	☐	
	DIO1~4 Low	☒	☐	☐	
WatchDog	10sec	☒	☐	☐	Actual 10.9 sec
	1min	☒	☐	☐	Actual 60.2 sec
	255sec	☒	☐	☐	Actual263.4sec
	Auto Reload	☒	☐	☐	
SMBus	SMBus IO	☒	☐	☐	SMBus Address 0xF000
	Read Byte	☒	☐	☐	Slave Address A0h
	Read Word	☒	☐	☐	
	Result / Read	☒	☐	☐	

9. Performance Test

	Hardware Information with Windows 7 Ultimate English SP1 32 Bit Driver Version
CPU	Intel® Atom CPU J1900 / 1.99GHz
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB
HDD/CFD	Innidisk / CFast3ME / 64GB

9.1. Performance Test

Test Result: (Display set 1920*1080 test)

Testing Software	Scope		Note
	AAEON	Ref.	
PCMark2005			Windows 7
PCMark	5448	-	PCMarks
CPU	4940	-	
Memory	3517	-	
Graphics	2848	-	
HDD	8801	-	
Benchmark (B)	-	-	
Average Efficiency	-	-	
PCMark 7			Windows 7
PCMark Suite	2402	-	PCMarks
Lightweight Suite	2140	-	
Productivity Suite	1880	-	
Entertainment Suite	4097	-	
Creativity Suite	1922	-	
Computation Suite	6726	-	
System Storage Suite	3562	-	
Benchmark (B)	-	-	
Average Efficiency	-	-	

Testing Software	Scope		Note
	AAEON	Ref.	
3Dmark2006 v121			Windows 7
3Dmark Score	2528	-	
SM2.0 Score	824	-	
HDR/SM3.0 Score	1018	-	
CPU Score	2279	-	
Benchmark (B)	-	-	
Average Efficiency	-	-	

3Dmark11 Professional Edition			Windows 7
Extreme 1920*1080			
3Dmark 11Score	X95		
Graphics Score	86		
Physics Score	1660		
Combined Score	94		
Performance 1280*720			
3Dmark 11Score	P265		
Graphics Score	226		
Physics Score	1672		
Combined Score	275		
Entry 1024*600			
3Dmark 11Score	E416		
Graphics Score	352		
Physics Score	1661		

Combined Score	345		
----------------	-----	--	--

Testing Software	Scope		Note
	AAEON	Ref.	
Performance Test 7.0			Windows 7
PassMark Rating	642.3	-	
CPU Mark	1546.6	-	
2D Graphics Mark	182.1	-	
3D Graphics Mark	147.9	-	
Memory Mark	478.5	-	
Disk Mark	1081.9	-	
CD Mark		-	

Testing Software	Scope		Note
	AAEON	Ref.	
Windows experience index			Windows 7
Processor	6.1	-	
Memory	5.5	-	
Graphics	4.1	-	
Gaming graphics	5.7	-	
Primary hard disk	5.9	-	

SATA Performance				
SATA HDD	Innodisk 3ME 64GB CFast			
CPU	Intel® Atom CPU J1900 / 1.99GHz			
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB			
OS	Windows 7 Ultimate English Version 32Bit			
Item	Comment / (unit)	Software	Score	Note
Single HDD (SATA port 1) SATAIII	Long bench(32mb zones)-Random access / (ms) (smaller is better)	HD Tach version 3.0.4.0 free	0.1ms	
	Long bench(32mb zones)-CPU utilization / (%,+/-2%) (smaller is better)	HD Tach version 3.0.4.0 free	5%	
	Long bench(32mb zones)-Average read / (MB/s)	HD Tach version 3.0.4.0 free	211.4MB/s	
	Long bench(32mb zones)-Burst Speed / (MB/s)	HD Tach version 3.0.4.0 free	215.5 MB/s	SATAII 150~300MB SATAIII up 300M/B

SATA Performance				
SATA HDD	TOSHIBA MK1665GSX 2.5" 5400rpm SATAII 160GB			
CPU	Intel® Atom CPU J1900 / 1.99GHz			
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB			
OS	Windows 7 Ultimate English Version 32Bit			
Item	Comment / (unit)	Software	Score	Note
Single HDD (SATA port 1) SATAIII	Long bench(32mb zones)-Random access / (ms) (smaller is better)	HD Tach version 3.0.4.0 free	20.6ms	
	Long bench(32mb zones)-CPU utilization / (%,+/-2%) (smaller is better)	HD Tach version 3.0.4.0 free	2%	
	Long bench(32mb zones)-Average read / (MB/s)	HD Tach version 3.0.4.0 free	76.0MB/s	
	Long bench(32mb zones)-Burst Speed / (MB/s)	HD Tach version 3.0.4.0 free	225.2 MB/s	SATAII 150~300MB SATAIII up 300M/B

SATA Performance				
SATA HDD	WD WD5000BPKX / 500GB 7200 RPM / 16MB Cache / SATA 6.0Gb/s / 2.5" SATA HDD			
CPU	Intel® Atom CPU J1900 / 1.99GHz			
Memory	Innidisk / SEC K4B4G0846D / DDR3L-1600 / 4GB			
OS	Windows 7 Ultimate English Version 32Bit			
Item	Comment / (unit)	Software	Score	Note
Single HDD (SATA port 1) SATAIII	Long bench(32mb zones)-Random access / (ms) (smaller is better)	HD Tach version 3.0.4.0 free	16.4ms	
	Long bench(32mb zones)-CPU utilization / (% ,+/-2%) (smaller is better)	HD Tach version 3.0.4.0 free	3%	
	Long bench(32mb zones)-Average read / (MB/s)	HD Tach version 3.0.4.0 free	97.4MB/s	
	Long bench(32mb zones)-Burst Speed / (MB/s)	HD Tach version 3.0.4.0 free	192.5 MB/s	SATAII 150~300MB SATAIII up 300M/B

USB3.0 Performance				
USB Flash	Apacer / AH450 / USB3.0 / 32GB			
Item	Comment / (unit)	Software	Transfer Rate (MB/s)	Note
USB3.0 (CN17)	Maximum Read	ATTO Disk Benchmark	134217 MB/s	
	Maximum Write	ATTO Disk Benchmark	19132 MB /s	
USB2.0 (CN18)	Maximum Read	ATTO Disk Benchmark	43648 MB/s	
	Maximum Write	ATTO Disk Benchmark	13808 MB /s	
USB2.0 (CN19)	Maximum Read	ATTO Disk Benchmark	43862 MB/s	
	Maximum Write	ATTO Disk Benchmark	13815 MB /s	

USB2.0 Performance				
USB Flash	TDK / USB2.0 / 32GB			
Item	Comment / (unit)	Software	Transfer Rate (MB/s)	Note
USB3.0 (CN17)	Maximum Read	ATTO Disk Benchmark	17895 MB/s	
	Maximum Write	ATTO Disk Benchmark	6985 MB /s	
USB2.0 (CN18)	Maximum Read	ATTO Disk Benchmark	18064 MB/s	
	Maximum Write	ATTO Disk Benchmark	7041 MB /s	
USB2.0 (CN19)	Maximum Read	ATTO Disk Benchmark	17385 MB/s	
	Maximum Write	ATTO Disk Benchmark	6749 MB /s	

10. Negative Test

10.1 USB Keyboard Negative Test

Methods	Result			Note
	Pass	Fail	N/A	
1. Boot into BIOS setup manual. 2. Press NumLock or ScrLk and press arrow key. 3. confirm arrow key function are normally	☒	☐	☐	

10.2 Suspend S3 Negative Test

Methods		Result			Note
		Pass	Fail	N/A	
1. Resume from S3.	RS232/422/485	☒	☐	☐	
2. Confirm com ports(RS232/422/485),	DIO	☒	☐	☐	
DIO, smartfan, LVDS	Smart Fan	☐	☐	☒	
backlight control can work properly.	LVDS Backlight control	☐	☐	☒	

10.3 Power Supply Negative Test

Methods	Result			Note
	Pass	Fail	N/A	
1. Test with ATX connector models. 2. Boot with ATX power supply "SeaSonic SSR-450RM" 3. Confirm SATA HDD can work properly	☐	☐	☒	

11. Stability test

11.1. Burn In Test

Under Room Temperature: 26 °C

OS: Windows 7 Ultimate English SP1

Test Item		Result			Note
		Pass	Fail	N/A	
Burn In Test V8.0(1037) Duty: 100 Time: over 12 hours	CPU	☒	☐	☐	
	RAM	☒	☐	☐	
	COM	☒	☐	☐	
	Video	☒	☐	☐	
	2D	☒	☐	☐	
	3D	☒	☐	☐	
	Disk	☒	☐	☐	
	Sound	☐	☐	☒	
	Network	☒	☐	☐	
	Parallel	☐	☐	☒	
	USB	2.0 ☒	☐	☐	
		3.0 ☒	☐	☐	

Note: COM PORT Speed Set to 9600.

11.2. Reboot Test

Under Room Temperature: 26 °C

OS: English Windows 7 Ultimate SP1 (32bit)

Reboot Test	Result			Note
	Pass	Fail	N/A	
Reboot test for 1000 cycles (AP: Passmark rebooter.exe)	☒	☐	☐	

11.3. Cold Boot Test

Under Room Temperature: 26 °C

OS: DOS

Cold Boot Test	Result			Note
	Pass	Fail	N/A	
AC loss cold boot test for 1000 cycles	☒	☐	☐	