

## Product Brief

# TC297TA – AURIX™ family

Dedicated to driver assistance systems

**AURIX™ family – TC297TA series is dedicated to the Advanced Driver Assistance Systems (ADAS) segment, addressing radar and camera applications.**

**Innovation** has been focused on system partitioning in order to further integrate system functionality and consequently reduce the complexity and area, providing our customers with highly optimized solutions.

The new devices include high-speed interfaces, integrated hardware acceleration and enhanced ECU validation and instrumentation tools.

All **ADAS** devices have been designed in accordance with the ISO 26262 safety methodology, meaning that they can be involved in automatic decisions to assist drivers, such as emergency braking.

### Dedicated radar peripherals

- › Radar signal processing accelerator (FFT) with hardware windowing functionality
- › Flexibility in radar signal acquisition with 4x internal ADCs
- › 16-bit parallel interface to connect external ADCs
- › High-precision input timers
- › High-precision output timers for DAC

### Dedicated vision peripherals

- › Picture pre-processing unit
- › Camera interface up to 100 MHz
- › MJPEG compression

### System benefits

- › High integration for reduced complexity and significant cost savings
- › Innovative single supply concept leads to best-in-class power consumption, and reduced number of external supplies
- › Diverse lockstep core concept enables reduced development effort
- › Support for ISO 26262 decisions such as emergency braking
- › High-speed trace port enables reduced requirements on integrated RAM and reduced overhead for automotive instrumentation vision

## Main features

### Application features TC297TA

- › Triple TriCore™ with up to 300 MHz
- › TriCore™ DSP functionality
- › Supporting floating point and fix point with all cores
- › Dedicated FFT HW acceleration unit
- › Up to 8 MB flash w/ECC protection
- › 128 KB EEPROM at 500 k cycles
- › Up to 728 KB + 2 MB RAM w/ECC protection for radar/camera image storage
- › 4x 12-bit SAR ADC converter
- › Ethernet 100 Mbit
- › FlexRay, CAN, LIN, SPI including data rate enhanced CAN FD
- › Redundant and diverse timer modules (GTM, CCU6, GPT12)
- › Programmable HSM (Hardware Security Module)
- › External memory interface
- › High-speed serial interface for inter-processor communication
- › High-speed trace port 2.5 GHz for real time vision and radar data tracking
- › Single voltage supply 5 V or 3.3 V
- › LFBGA-292 package


### Most innovative safety

- › Diverse lockstep core with clock delay
- › Access permission system
- › Safety management unit
- › Safe DMA
- › I/O, clock, voltage monitor
- › ISO 26262 compliance to support safety requirements up to ASIL-D
- › Availability of AUTOSAR 4.x

# TC297TA – AURIX™ family

Dedicated to driver assistance systems

Block diagram

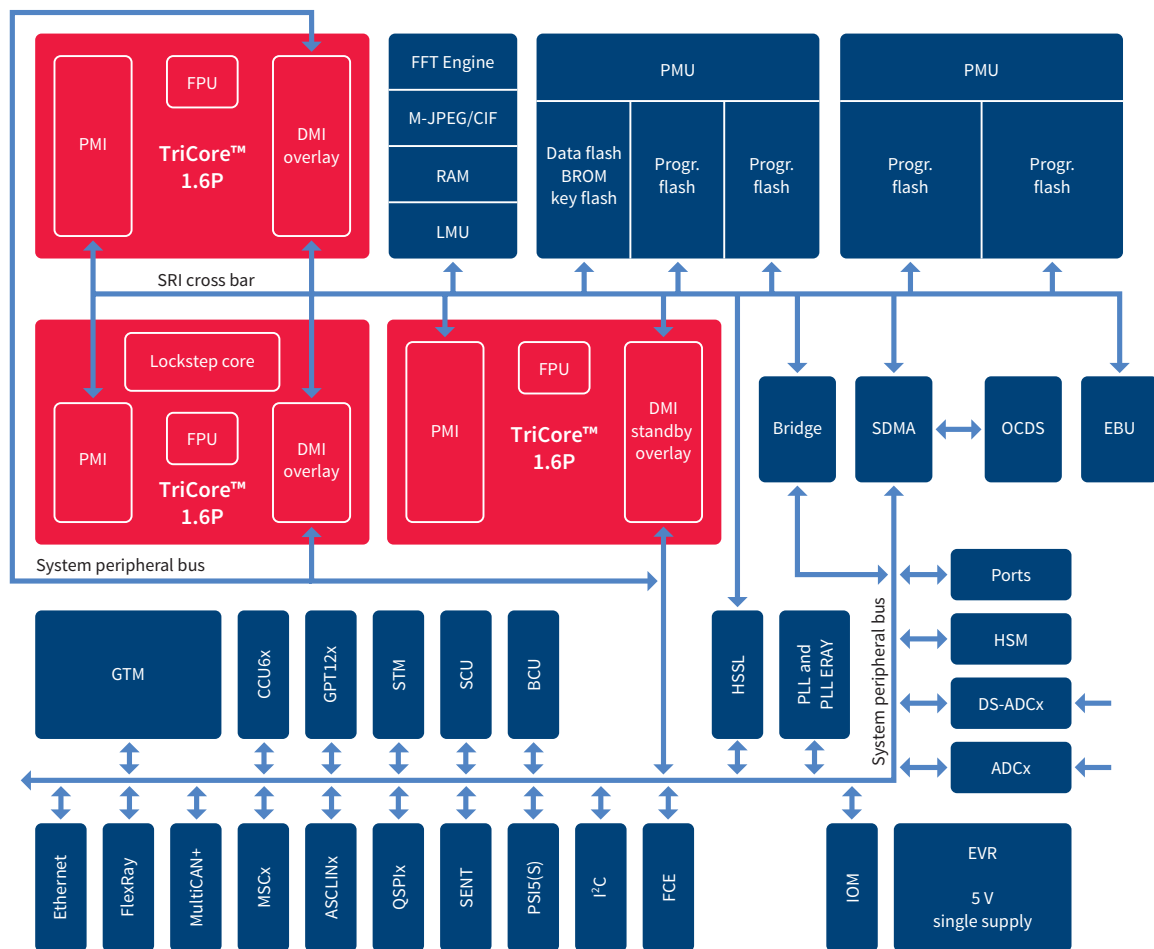

## Product summary

Type	Core	Accelerator	eFlash [MB]	Data flash [KB]	Frequency [MHz]	SRAM [MB]	Package	Temp. range [°C]
SAK-TC297TA-128F300	3x TriCore™	FFT/pixel	up to 8	128 <sup>1)</sup>	up to 300	2.75	LFBGA-292	-40 ... +125

1) EEPROM emulation (up to 500 k w/e cycles)

Published by  
Infineon Technologies AG  
81726 Munich, Germany

© 2019 Infineon Technologies AG.  
All Rights Reserved.

### Please note!

THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY AND ANY INFORMATION GIVEN HEREIN SHALL IN NO EVENT BE REGARDED AS A WARRANTY, GUARANTEE OR DESCRIPTION OF ANY FUNCTIONALITY, CONDITIONS AND/OR QUALITY OF OUR PRODUCTS OR ANY SUITABILITY FOR A PARTICULAR PURPOSE. WITH REGARD TO THE TECHNICAL SPECIFICATIONS OF OUR PRODUCTS, WE KINDLY ASK YOU TO REFER TO THE RELEVANT PRODUCT DATA SHEETS PROVIDED BY US. OUR CUSTOMERS AND THEIR TECHNICAL DEPARTMENTS ARE REQUIRED TO EVALUATE THE SUITABILITY OF OUR PRODUCTS FOR THE INTENDED APPLICATION.

WE RESERVE THE RIGHT TO CHANGE THIS DOCUMENT AND/OR THE INFORMATION GIVEN HEREIN AT ANY TIME.

### Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.

Order Number: B158-I0310-V1-7600-EU-EC-P  
Date: 03/2019