




7. SHOWS CABLE ENTRY DIMENSIONS.

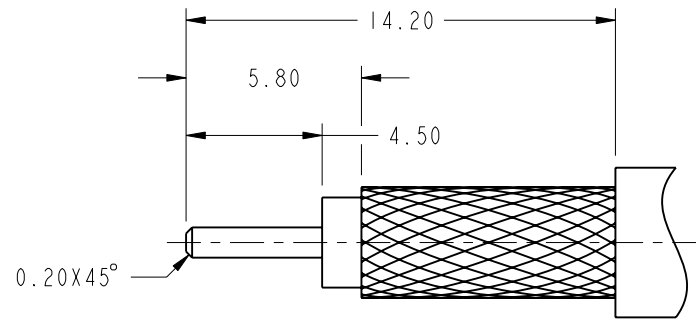

RECOMMENDED CABLE STRIPPING DIMENSIONS

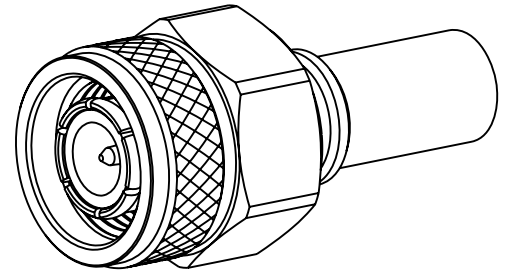

SCALE 2.000

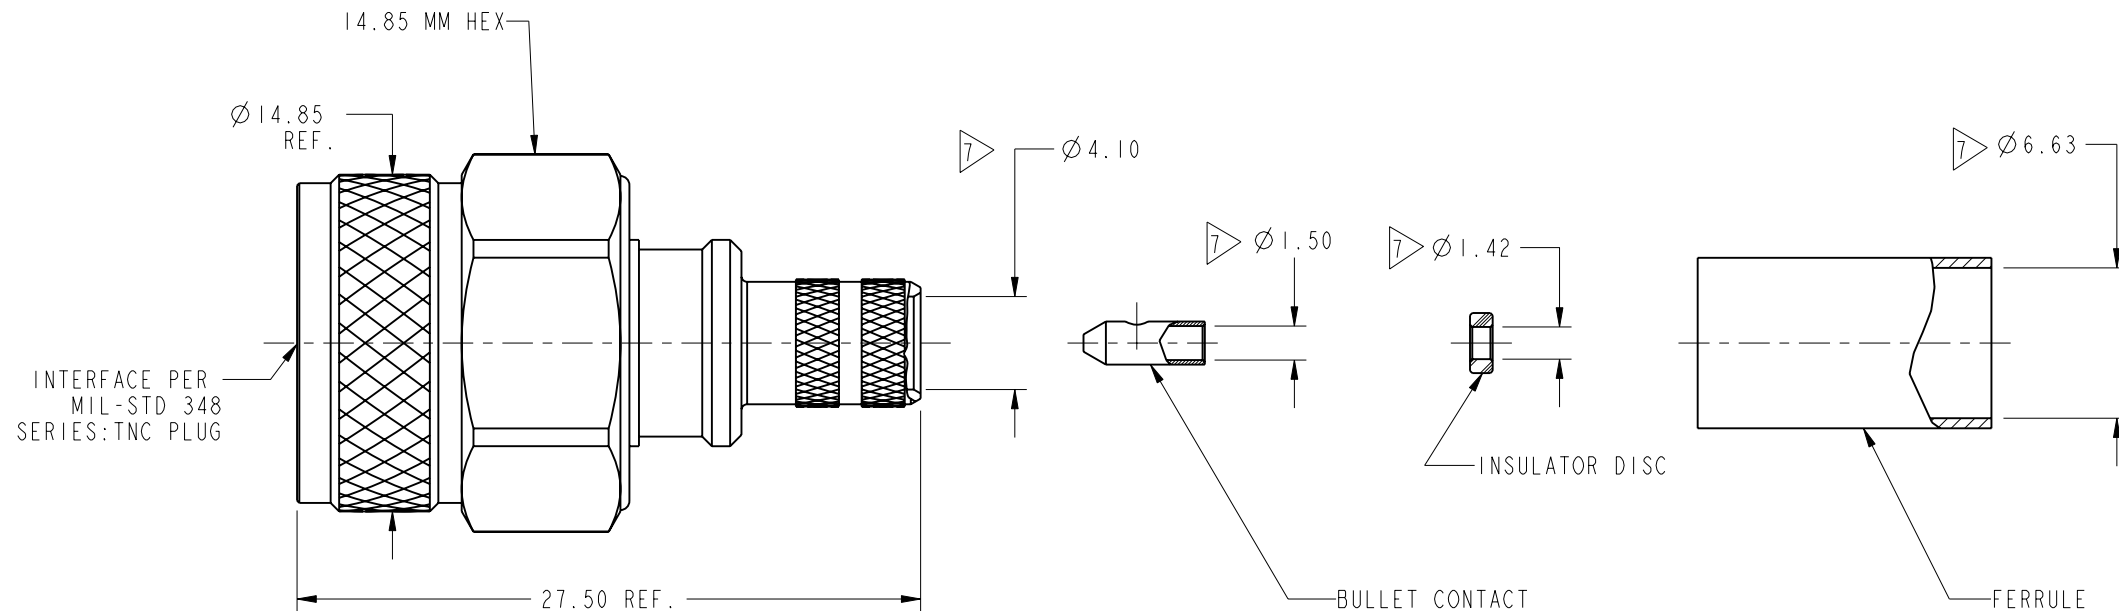

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN W.ZENG	DATE 29-May-18	TITLE TNC STR PLUG FOR LMR-240-UF,		Amphenol RF www.amphenolrf.com	
	REFERENCE EAR # 8049	ENGINEER SUNDE	DATE 29-May-18			DRAWING NO.31-6825	
	CONFIGURATION LEVEL: In Work	APPROVED S.HSIEH	DATE 29-May-18	SCALE: 4.0:1.0		SHEET 2 OF 2	ITEM NO. 31-6825
	FINISH	CAD FILE	DWG SIZE B		REV A	PART NO. 31-6825	