




OUTLINE DIMENSION & BLOCK DIAGRAM

*PG 12864-A for SMT type

*PG 12864-K for COB type

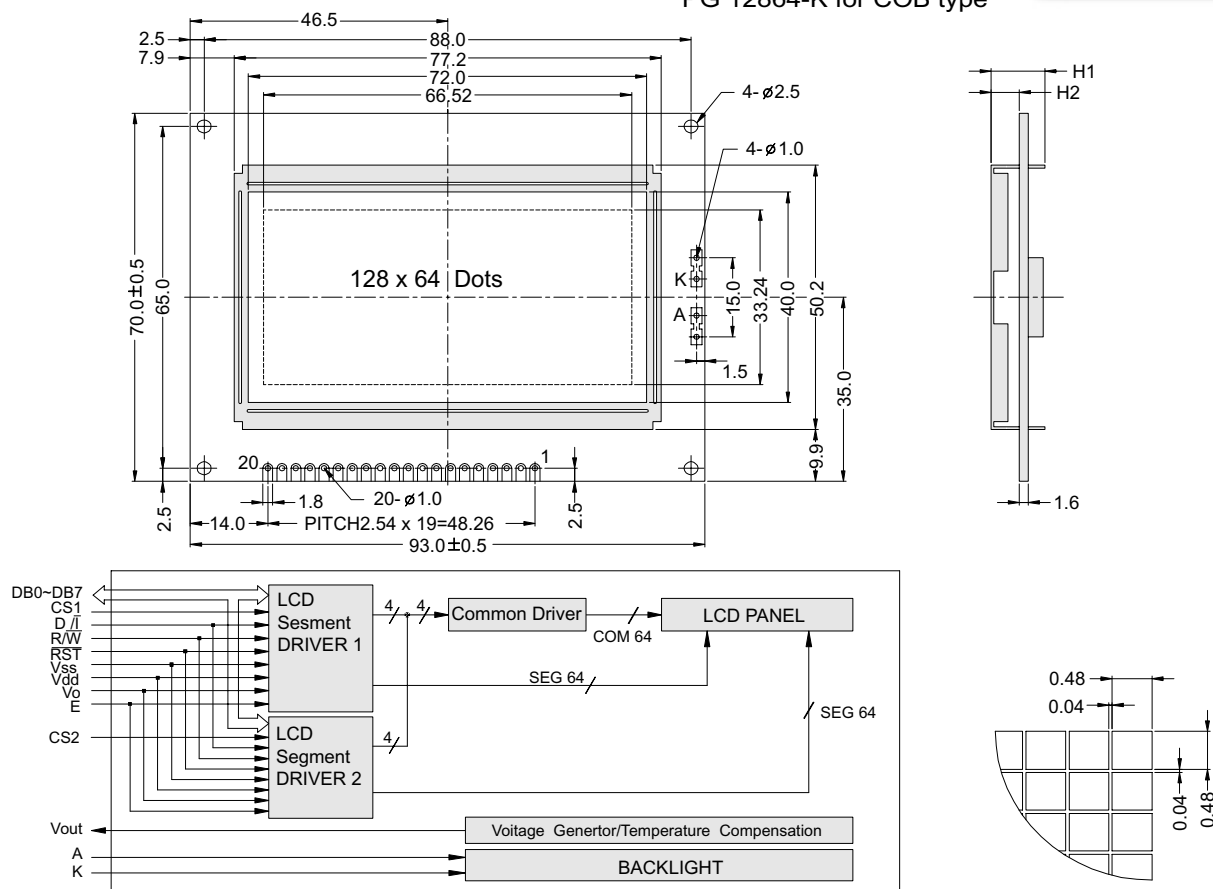

The tolerance unless classified $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION			
Overall Size	93.0 x 70.0	Module	H2 / H1
View Area	72.0 x 40.0	W / O B/L	5.1 / 9.7
Dot Size	0.48 x 0.48	EL B/L	5.1 / 9.7
Dot Pitch	0.52 x 0.52	LED B/L	8.9 / 13.5

PIN ASSIGNMENT		
Pin no.	Symbol	Function
1	Vss	Power supply(GND)
2	Vdd	Power supply(+)
3	Vo	Contrast Adjust
4	D/I	Command / data input
5	R/W	Data read / write
6	E	Enable signal
7-14	DB0-DB7	Data bus line
15	CS1	Chip selection driver 1
16	CS2	Chip selection driver 2
17	RST	Reset
18	Vout	Negative voltage output
19	A	Power supply for LED B/L (+)
20	K	Power supply for LED B/L (-)

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Condition	Min.	Max.	Units
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7.0	V
LCD driving supply voltage	Vdd-Vee	25°C	-0.3	19.0	V
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V
ELECTRICAL CHARACTERISTICS					
Item	Symbol	Condition	Min.	Typical	Max. Units
Power supply voltage	Vdd-Vss	25°C	4.5	—	5.5 V
LCD operation voltage	Vop	Top	N	W	N W V
		-20°C	—	14.3	— 14.7 V
		0°C	9.7	—	10.2 — 10.7 V
		25°C	8.9	13.2	9.4 13.6 9.9 14 V
		50°C	8.6	—	9.1 9.6 — — V
		70°C	—	12	— 12.4 — 12.8 V
LCM current consumption (No B/L)	Idd	Vdd=5V	—	2.5	5 mA
Backlight current consumption	LED/edge	VB/L=4.2V	—	—	— mA
	LED/array	VB/L=4.2V	—	390	— mA

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED,EL Backlight feature, other Specs not available on catalog is under request.

