

⊕ Hover to zoom



7-SEG RGB click

PID: MIKROE-2734

Weight: 33 g

7-SEG RGB click carries a full color single 7 segment digit **display**. The click is designed to run on either 3.3V or 5V power supply. It communicates with the target microcontroller over the CS, and PWM pin on the mikroBUS™ line.

Quantity

1

Add to Cart

Looking for customized version of this product?

If you have other questions about this product contact us [here](#).


Table of contents

1. [Display features](#)
2. [Specifications](#)
3. [Pinout diagram](#)
4. [Jumpers and settings](#)
5. [Programming](#)
6. [Code snippet](#)
7. [Downloads](#)

7-SEG RGB click carries a full-color single 7 segment digit **display**. The click is designed to run on either 3.3V or 5V power supply. It communicates with the target microcontroller over the CS, and PWM pin on the mikroBUS™ line.

The click can be connected in a chain, in order to display a larger number of characters. Unlike with conventional 7 segment displays, you will be able to use multiple colors on the display.

Display features

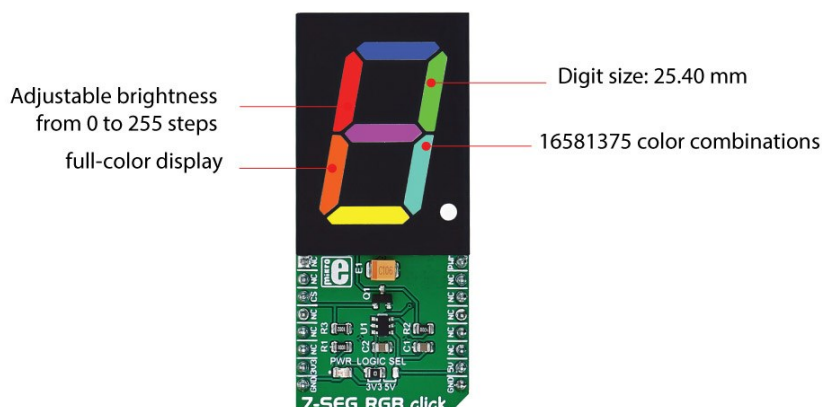

Each segment has R, G, B LEDs that can be adjusted in 255 steps and therefore 16,581,375 color combinations are available for each segment of the digit on the display.

Also, the ability to **control the brightness** of all the LED's is driven at 255 steps. It should be noted that the brightness values above 80 should rarely

be used.

Specifications

Type	LED Segment
Applications	Displaying digits and letters on a seven segment in full color
Brightness	Adjustable from 0 to 255 steps
On-board modules	RGBdigit full color single 7 Segment digit display
Key Features	Multi-colored display
Interface	PWM
Input Voltage	3.3V or 5V
Click board size	L (57.15 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **7-SEG RGB click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin	 mikroBUS				Pin	Notes
	NC	1	AN	PWM	16	PWM	Data input
	NC	2	RST	INT	15	NC	
Write enable (active low)	CS	3	CS	TX	14	NC	
	NC	4	SCK	RX	13	NC	
	NC	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
Power supply	+3.3V	7	3.3V	5V	10	+5V	Power supply
Ground	GND	8	GND	GND	9	GND	Ground

Jumpers and settings

Designator	Name	Default Position	Default Option	Description
JP1	Logic level	Left	3.3V	Data in level Voltage Selection 3V3/5V, left position 3V3, right position 5V

Programming

Code examples for 7-SEG RGB click, written for MikroElektronika hardware and compilers are available on Libstock.

Code snippet

The following code snippet writes the numbers 1, 2 and 3 in green, red and blue colors on 7-SEG RBG click.

```
01 #define ONE      0x06
02 #define TWO      0x5B
03 #define THREE    0x4F
04 sbit CS_BIT at GPIOD_ODR.B13;
05 sbit RGB_CONTROL_BIT at GPIOA_ODR.B0;
06 void systemInit()
07 {
08     GPIO_Digital_Output( &GPIOD_BASE, _GPIO_PINMASK_13 );
09     GPIO_Digital_Output( &GPIOA_BASE, _GPIO_PINMASK_0 );
10 }
11 void RGB_7_SEG_Init()
12 {
13     RGB_CONTROL_BIT = 0;
14     CS_BIT = 0;
15 }
16 void RGB_7_SEG_Task()
17 {
18     setSevenSegment(ONE,40,0,0);
19     Delay_ms(1000);
20     setSevenSegment(TWO,0,40,0);
21     Delay_ms(1000);
22     setSevenSegment(THREE,0,0,40);
23     Delay_ms(1000);
24 }
25 void main()
26 {
27     systemInit();
28     RGB_7_SEG_Init();
29     while( 1 )
30     {
31         RGB_7_SEG_Task();
32     }
33 }
```

Downloads



mikroBUS™ Standard specification [↗](#)



RGBDigit display datasheet



7-SEG RGB click schematic



LibStock: 7-SEG RGB click library [↗](#)



Click Boards™ Catalog

PRODUCTS IN THE SAME CATEGORY

Subscribe to our newsletter:

➔

By subscribing to newsletter you agree to our terms and conditions and the privacy policy.

Follow us on:



PRODUCT LINES

click Boards™ | Compilers | Development Boards | Smart Displays | Programmers | Development Kits | Customization

TOOLCHAINS

PIC | dsPIC | PIC32 | ARM | AVR | FT90x | 8051

COMPANY

About us | Contact | Support | Distributors | Careers | Internship | Make a click™ program

✕

To give you the best possible experience, this site uses cookies. Using our site means you're agreeing to our use of cookies. We have published a new cookie policy, which you should read to find out more about the cookies we use. [View cookies policy.](#)

Got it!

SDK | Hexiwear™ | Libstock™ | Blog | eBooks | Forum | Outlet | Legacy Products

Copyright© 2018 MikroElektronika d.o.o. | [Terms and Conditions](#) | [Privacy Policy](#)