

LEAD FREE PART NUMBER


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GL00LF

Performance class: 4 --> 200 mating/un-mating
6 --> 500 mating/un-mating

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0000

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

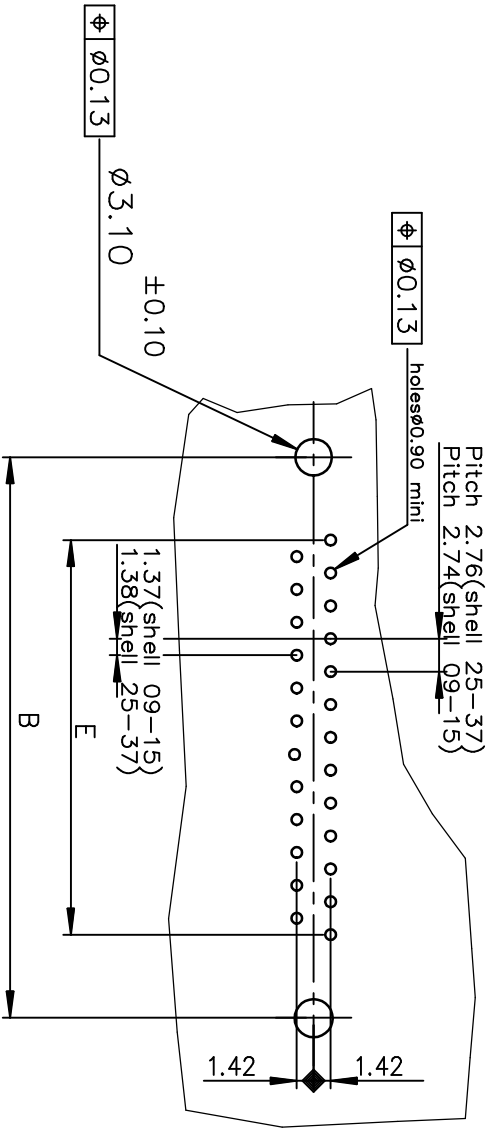

mat'l. code			surface			tolerance			projection	product family	
l	tr	ecn no	dr	date	tolerances unless otherwise specified	ISO 1302	ISO 406	ISO 1101		D-SUB	
F		ELX-121654	AB	2015-10-26	angles				MM	MALE DELTA-D STRAIGHT, SOLDER TYPE	
G		ELX-1-42817	ACU	2021-10-18	linear						
					0°±1°			.000±0.005	scale 2:1		
									dr	LELEON	1992-09-14
										engr	GREGAR MATTHEW 2021-10-18
										chr	GREGAR MATTHEW 2021-10-18
										appd	SANOI KURAKOSI 2021-10-18
sheet index	revision	sheet	G	1							

dwg no	sheet 1 of 1	size
C01-8646-0106	A3	
type Product Customer Drawing		