
Surface-Mount Silicon Pin Photodiode

QSB34GR, QSB34ZR, QSB34CGR, QSB34CZR




PLCC 2 LEAD
CASE 776AX

PLCC 2 LEAD
CASE 776AY

Features

- Daylight Filter (QSB34GR and QSB34ZR Only)
- Surface−Mount Packages:
  - QSB34GR / QSB34CGR for Over−Mount Board
  - QSB34ZR / QSB34CZR for Under−Mount Board
- Fast PIN Photodiode
- Wide Reception Angle: 120°
- Large Chip Size: 3 mm x 3 mm
- Sensitive Area: 2.55 mm x 2.55 mm
- High Sensitivity
- Low Capacitance
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

SCHEMATIC



ORDERING INFORMATION

Part Number	Operating Temperature	Package	Shipping†
QSB34GR	−25 to +85°C	PLCC 2 Lead, case 776AX (Pb−Free)	1000 / Tape & Reel
QSB34ZR		PLCC 2 Lead, case 776AY (Pb−Free)	
QSB34CGR		PLCC 2 Lead, case 776AX (Pb−Free)	
QSB34CZR		PLCC 2 Lead, case 776AY (Pb−Free)	

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2008

August, 2023 − Rev. 10
Publication Order Number:
QSB34/D

Downloaded from Arrow.com.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Operating Temperature	T_{OPR}	−25 to +85	°C
Storage Temperature	T_{STG}	−40 to +85	°C
Soldering Temperature (Note 1)	T_{SOL}	260	°C
Reverse Voltage	V_R	32	V
Power Dissipation at (or below) 25°C Free Air Temperature	P_C	150	mW

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.
1. Soldering time ≤ 5 s.

Recommended I_R Reflow Soldering Profile

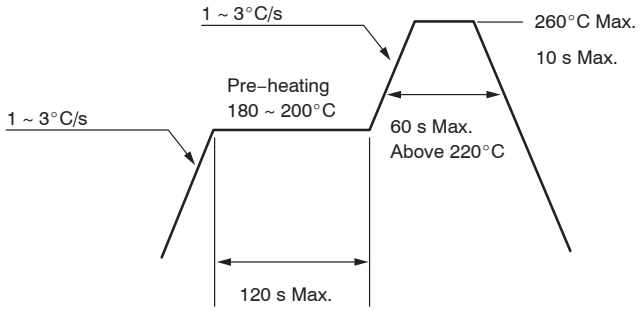


Figure 1. Recommended I_R Reflow Soldering Profile

ELECTRICAL / OPTICAL CHARACTERISTICS (Values are at T_A = 25°C unless specified otherwise)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_R	Reverse Voltage	I_R = 0.1 mA	32			V
$I_{R(D)}$	Dark Reverse Current	V_R = 10 V			30	nA
λ_{PK}	Peak Sensitivity			940		nm
θ	Reception Angle at 1/2 Power			±60		°
I_{PH}	Photo Current	E_E = 1 mW/cm^2, V_{CE} = 5 V	25	37		μA
C	Capacitance	V_R = 3 V		25		pF
t_r	Rise Time	V_R = 10 V, R_L = 50 Ω		50		ns
t_f	Fall Time	V_R = 10 V, R_L = 50 Ω		50		ns
$\lambda_{0.5}$	Special Sensitivity	QSB34GR, QSB34ZR	730		1100	nm
		QSB34CGR, QSB34CZR	400		1100	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Downloaded from Arrow.com.

TYPICAL PERFORMANCE CHARACTERISTICS

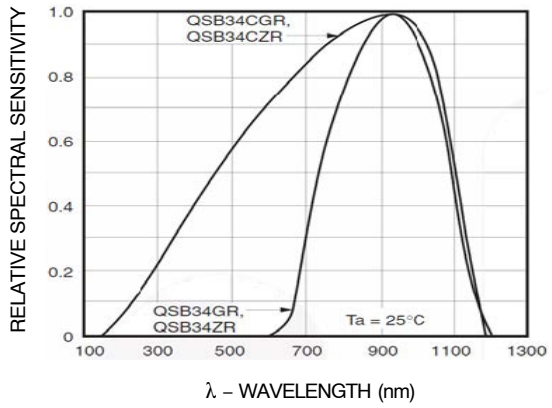


Figure 1. Relative Spectral Sensitivity vs. Wavelength

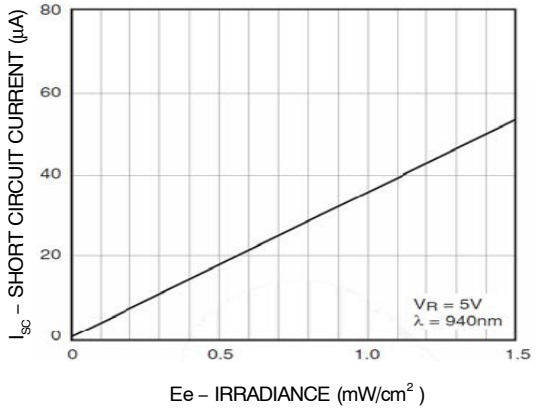


Figure 2. Short Circuit Current vs. Irradiance

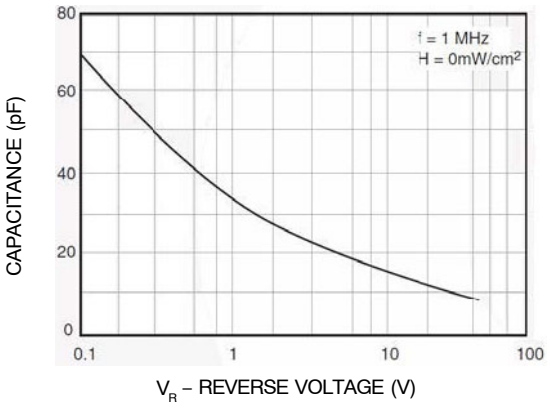


Figure 3. Capacitance vs. Reverse Voltage

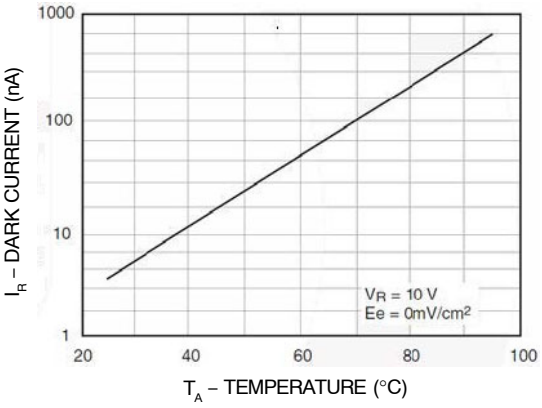


Figure 4. Dark Current vs. Temperature

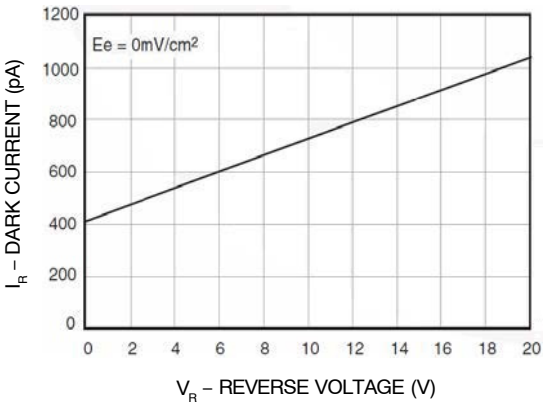


Figure 5. Dark Current vs. Reverse Voltage


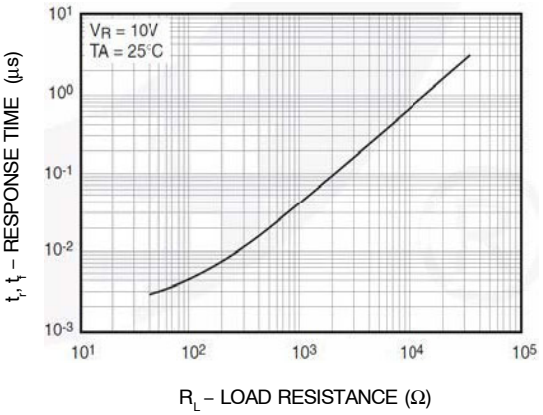


Figure 6. Response Time vs. Load Resistance


Downloaded from Arrow.com.

PLCC 2 LEAD
CASE 776AX
ISSUE O


DATE 28 FEB 2017

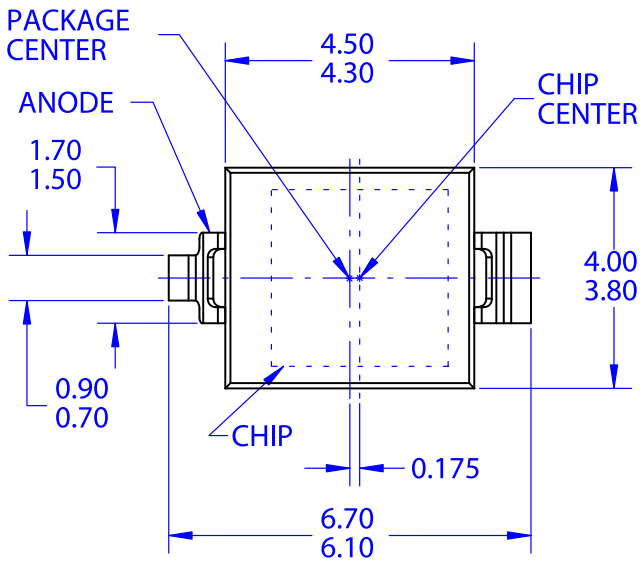

TOP VIEW

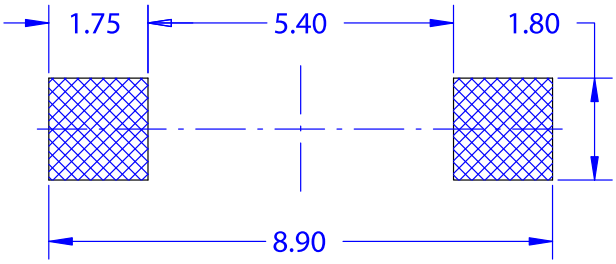

LAND PATTERN RECOMMENDATION

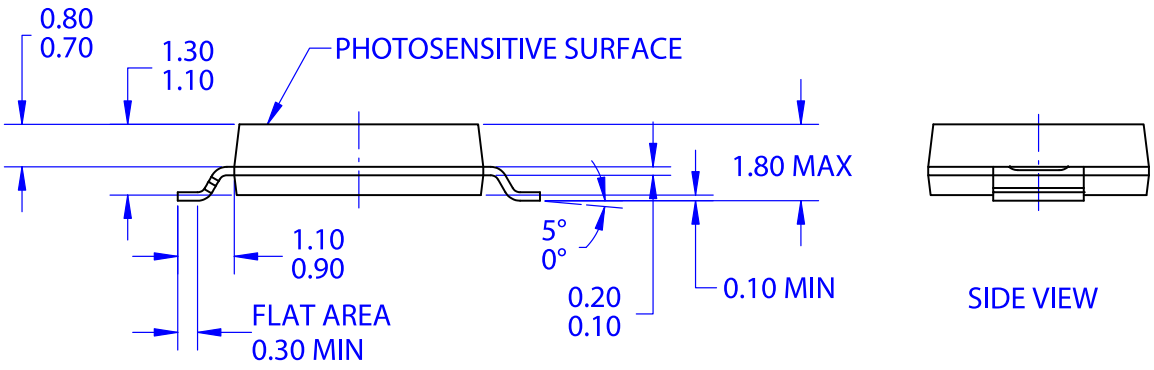

FRONT VIEW

SIDE VIEW

NOTES:
A. NO INDUSTRY STANDARD APPLIES TO THIS PACKAGE
B. ALL DIMENSIONS ARE IN MILLIMETERS
C. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS


DOCUMENT NUMBER:	**98AON13760G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**PLCC 2 LEAD**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.


Downloaded from Arrow.com.

PLCC 2 LEAD
CASE 776AY
ISSUE O


DATE 28 FEB 2017

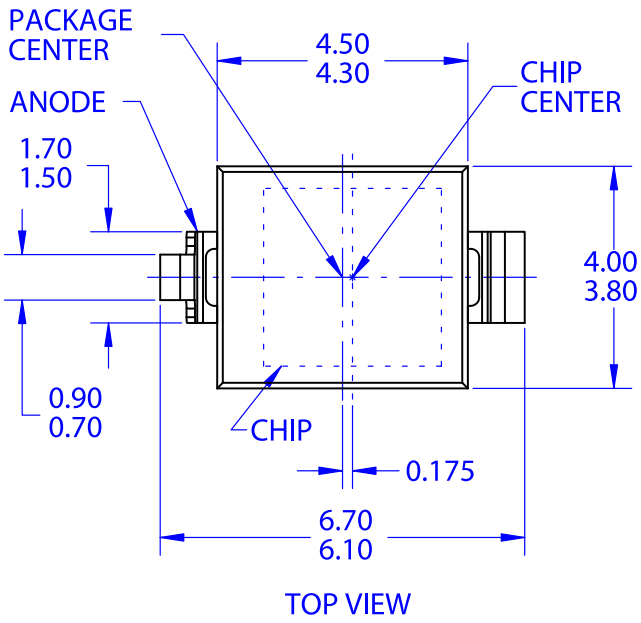


TOP VIEW

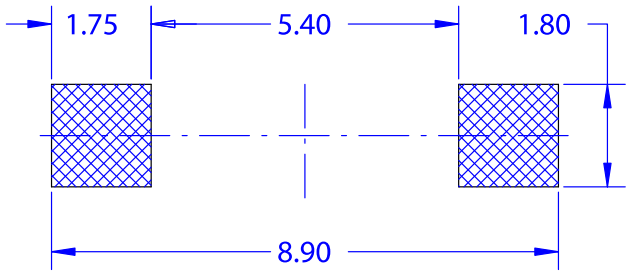

LAND PATTERN RECOMMENDATION

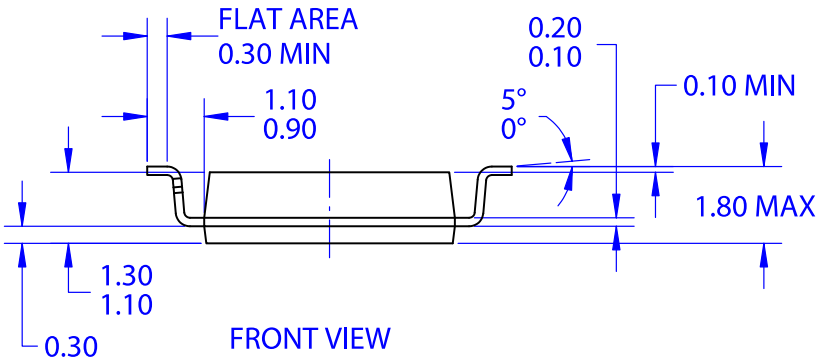

FRONT VIEW



SIDE VIEW

NOTES:
A. NO INDUSTRY STANDARD APPLIES TO THIS PACKAGE
B. ALL DIMENSIONS ARE IN MILLIMETERS
C. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS

DOCUMENT NUMBER:	**98AON13757G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**PLCC 2 LEAD**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

Downloaded from Arrow.com.

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

◊

Downloaded from Arrow.com.