

High Dynamic Range IF Amplifier



Features

- Ultra High Linearity
- 1.5W Typical @ P1dB
- Flat Gain Response
- Exceptional Unit-to-Unit Amplitude & Phase Repeatability
- Unconditionally Stable

Technical Specifications

Parameter	Typical $T_c = +25^\circ\text{C}$	Min / Max $T_c = 0^\circ\text{C to } +50^\circ\text{C}$
Frequency	2 – 70 MHz	2 - 70 MHz
Gain (dB)	21.9 (± 0.7)	---
Gain vs. Temperature (dB)	---	+0.2 / -0.5
Gain Flatness (dB)	0.5	0.8 Max.
P_{OUT} @ 1dB Compression (dBm)	+33	+32 Min.
3 rd Order Output * Intercept Point (dBm)	+48	---
2 nd Order Output * Intercept Point (dBm)	+95	---
Reverse Isolation (dB)	32	31
VSWR In	1.5:1	1.5:1 Max.
Out	1.5:1	1.5:1 Max.
Noise Figure (dB)	4.5	5.5 Max.
Power Vdc	+24	+24
mA	600	625 Max.

Absolute Maximum Ratings

Parameter	Specification
Operating Case Temperature (T_c)	-20°C to +71°C
Storage Case Temperature (T_c)	-55°C to +125°C
DC Voltage @ 25°C	+26 Volts
Continuous RF Input Power	+20 dBm
Short Term RF Input Power	200 Milliwatts (1 Minute Max.)
Max. Peak Input Power	0.5 Watt (3 μsec Max.)

Rev Date: October 4, 2023


ECN: Increased DC current from 420 to 625 mA to remain compliant with current P1dB performance requirements. NF increased from 3.5 dB to 5.5 dB.

* All Linearity measurements are conducted at 15 MHz

General Notes

Cooling	Adequate heat sink required to ensure the mounting surface does not exceed the maximum operating temperature. Standard and custom options available upon request.
Typical Values	Data and graphs provided are an illustration of performance and not guaranteed.
Min./Max. Values	Specifications are guaranteed when tested in a 50 Ω (ohm) system with a DC supply voltage tolerance of $\pm 2\%$.
Revisions	Spectrum reserves the right to make revisions to both the product and/or the information contained within their datasheets without advanced notice.

Typical Performance Graphs

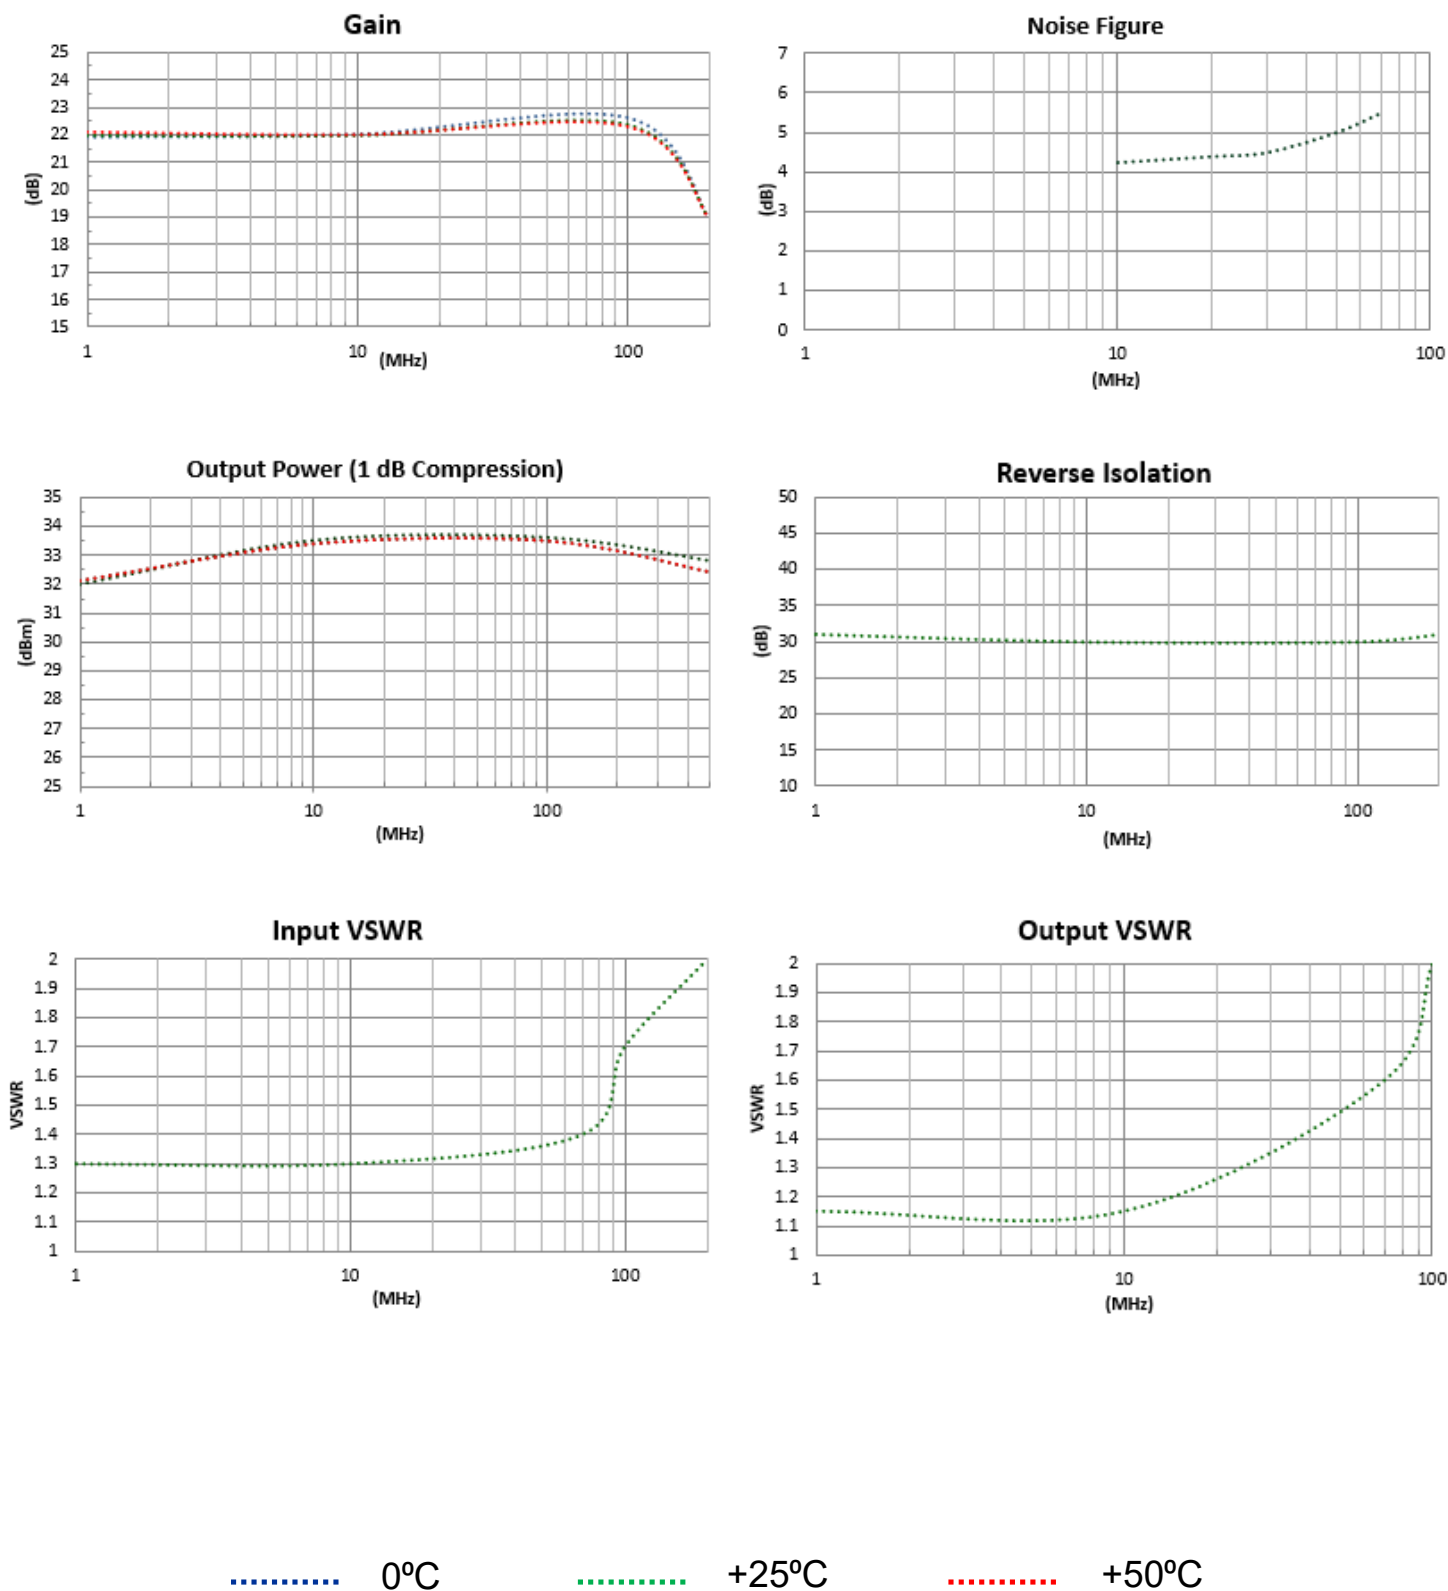

Outline Drawing

(For Reference Only)

