


High Power RF LDMOS Field Effect Transistor 8 W, 700 – 2200 MHz

Description

The PTFA220081M is an unmatched 8-watt LDMOS FET suitable for power amplifiers applications with frequencies from 700 MHz to 2200 MHz. This LDMOS transistor offers excellent gain, efficiency and linearity performance in a small overmolded plastic package.

PTFA220081M
Package PG-SON-10

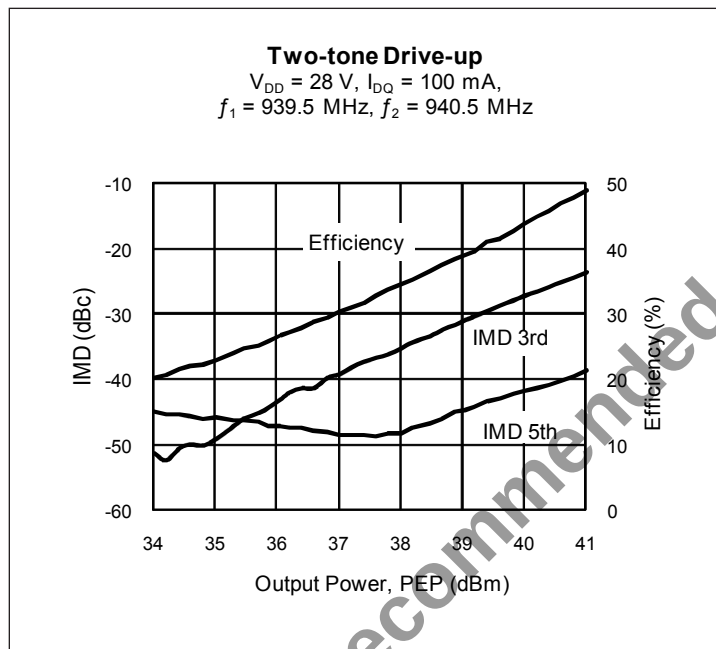

Features

- Typical two-carrier WCDMA performance, 8 dB PAR
 - $P_{OUT} = 33 \text{ dBm Avg}$
 - $ACPR = -40 \text{ dBc}$
- Typical CW performance, 940 MHz, 28 V
 - $P_{OUT} = 40 \text{ dBm}$
 - Efficiency = 59%
 - Gain = 20 dB
- Typical CW performance, 2140 MHz, 28 V
 - $P_{OUT} = 40 \text{ dBm}$
 - Efficiency = 50%
 - Gain = 15 dB
- Capable of handling 10:1 VSWR @ 28 V, 8 W (CW) output power
- Integrated ESD protection
- Excellent thermal stability
- Pb-free and RoHS compliant

RF Characteristics

Two-tone Measurements (not subject to production test – verified by design / characterization in Infineon test fixture)
 $V_{DD} = 28 \text{ V}$, $I_{DQ} = 100 \text{ mA}$, $P_{OUT} = 8 \text{ W PEP}$, $f = 2140 \text{ MHz}$, tone spacing = 1 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	17	—	dB
Drain Efficiency	η_D	—	38	—	%
Intermodulation Distortion	IMD	—	-31	—	dBc

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics (cont.)

Two-tone Measurements (not subject to production test – verified by design / characterization in Infineon test fixture)
 $V_{DD} = 28\text{ V}$, $I_{DQ} = 100\text{ mA}$, $P_{OUT} = 8\text{ W PEP}$, $f = 940\text{ MHz}$, tone spacing = 1 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	20.7	—	dB
Drain Efficiency	η_D	—	39	—	%
Intermodulation Distortion	IMD	—	-30	—	dBc
Input Return Loss	IRL	—	20	—	dB

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ }\mu\text{A}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ A}$	$R_{DS(on)}$	—	1.10	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}$, $I_{DQ} = 100\text{ mA}$	V_{GS}	2.0	2.5	3.0	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	-0.5 to +12	V
Junction Temperature	T_J	175	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}$, 8 W DC)	$R_{\theta JC}$	4.2	$^{\circ}\text{C/W}$





Moisture Sensitivity Level

Level	Test Standard	Package Temperature	Unit
3	IPC/JEDEC J-STD-020	260	$^{\circ}\text{C}$


Ordering Information

Type	Package Outline	Package Description	Shipping
PTFA220081M V4	PG-SON-10	Molded plastic, SMD	Tape & Reel, 500 pcs


Typical Performance, 940 MHz

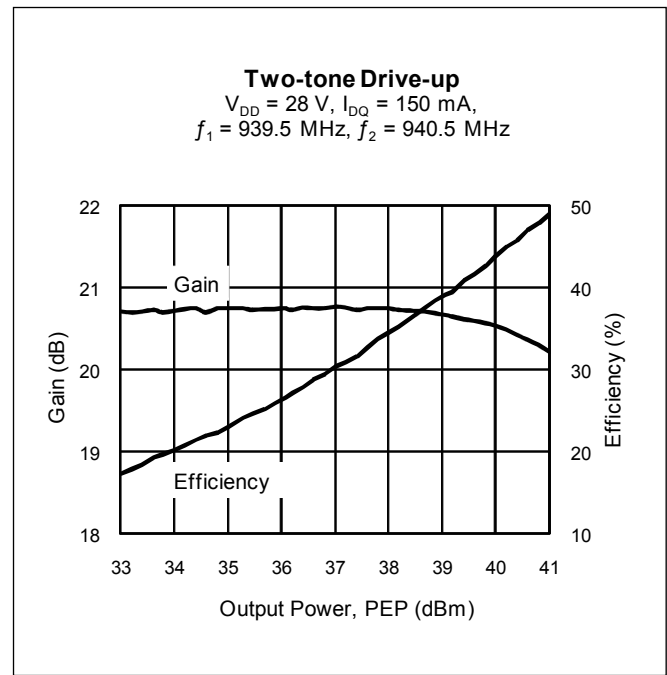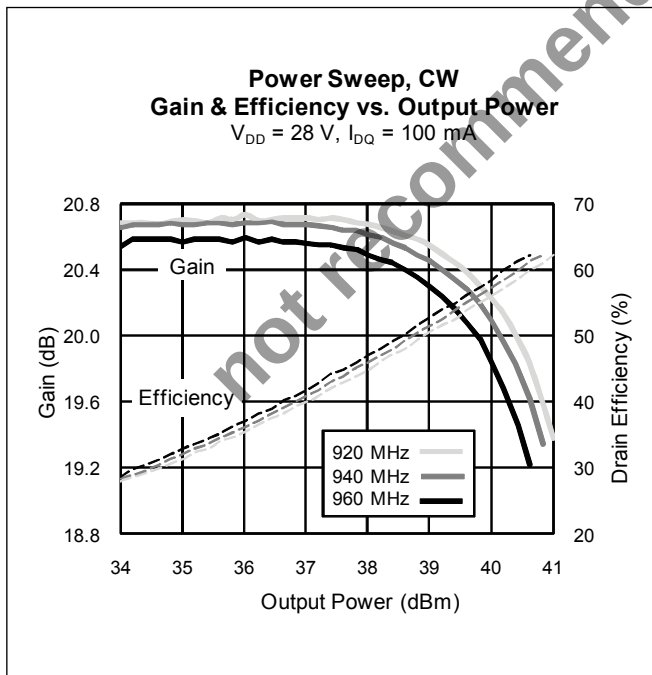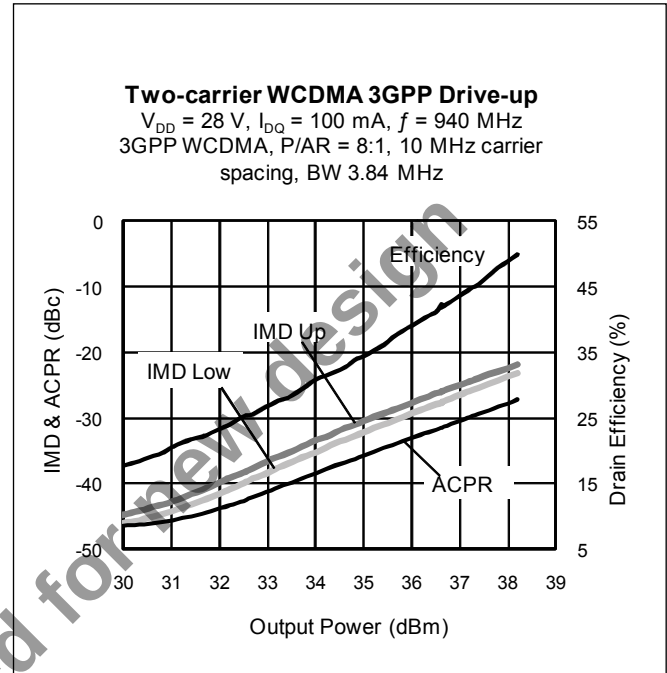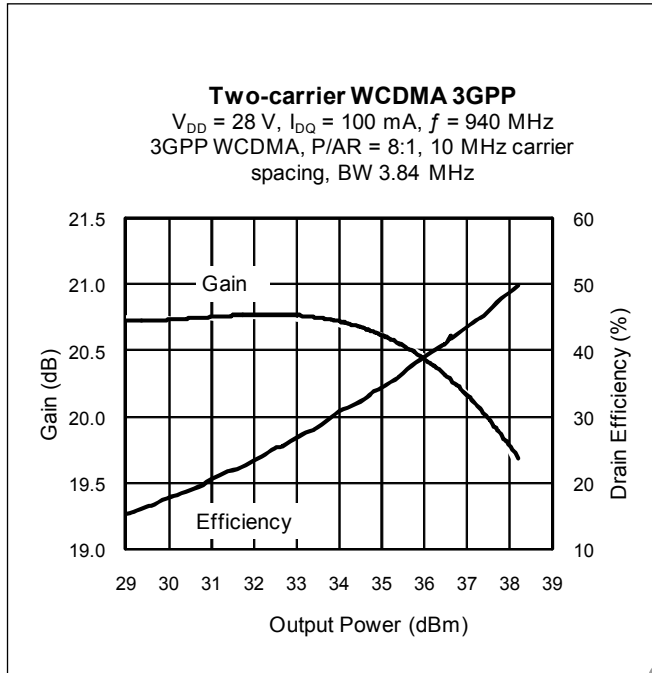


Typical Performance, 940 MHz (cont.)

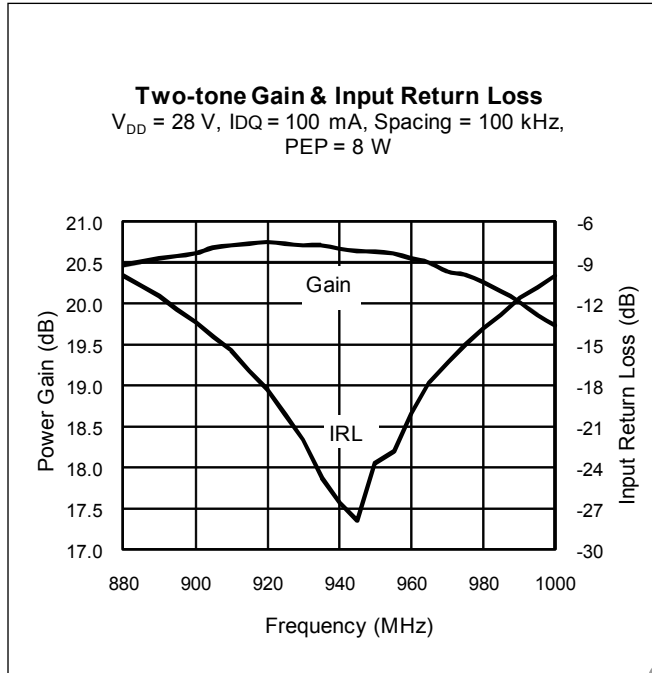


Broadband Circuit Impedance

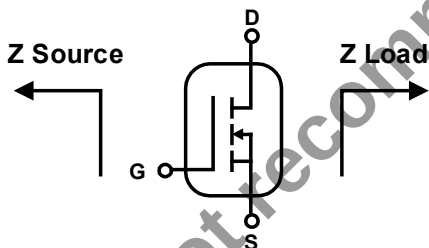


Frequency MHz	Z Source Ω		Z Load Ω	
	R	jX	R	jX
869	1.54	7.20	14.11	9.10
894	1.49	6.60	14.91	8.70
920	1.59	5.70	13.83	9.10
940	1.61	5.10	10.83	10.70
960	1.61	5.10	13.34	9.80
1930	1.91	-2.10	5.59	6.20
1990	2.11	-1.70	4.21	5.20
2110	2.45	-1.00	4.43	5.10
2170	2.30	-1.00	4.25	5.60

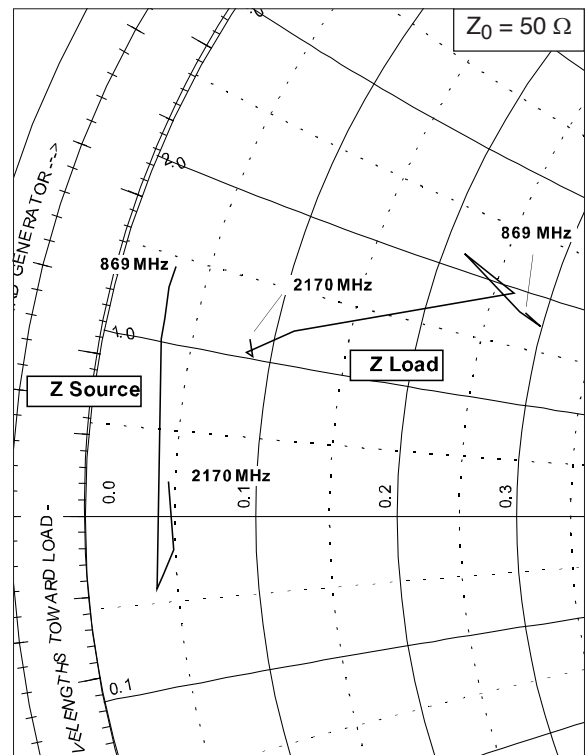

Reference Circuit, 920 – 960 MHz

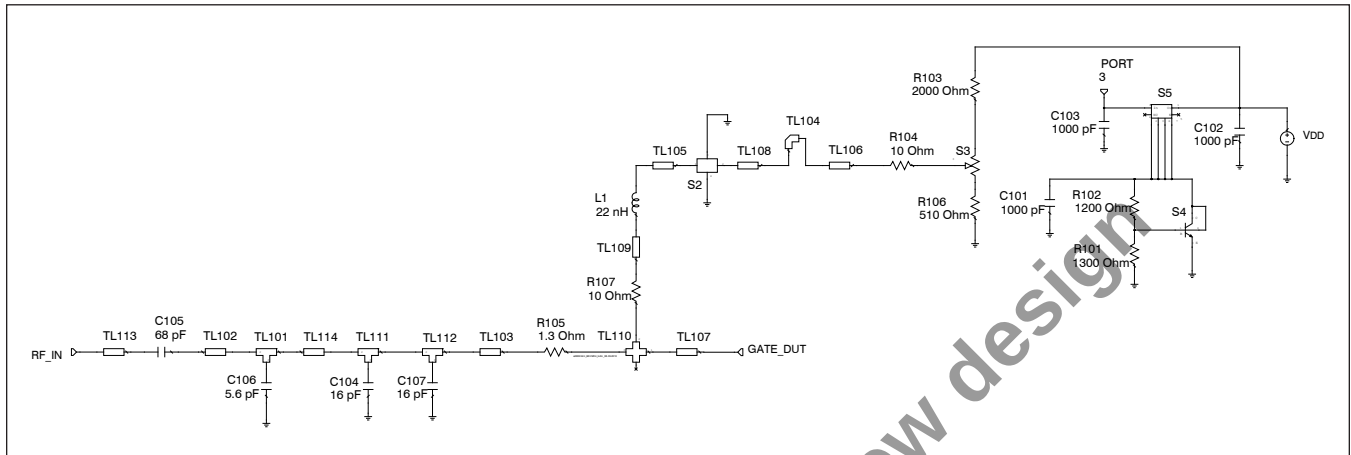

Reference circuit input schematic for $f = 920 - 960$ MHz

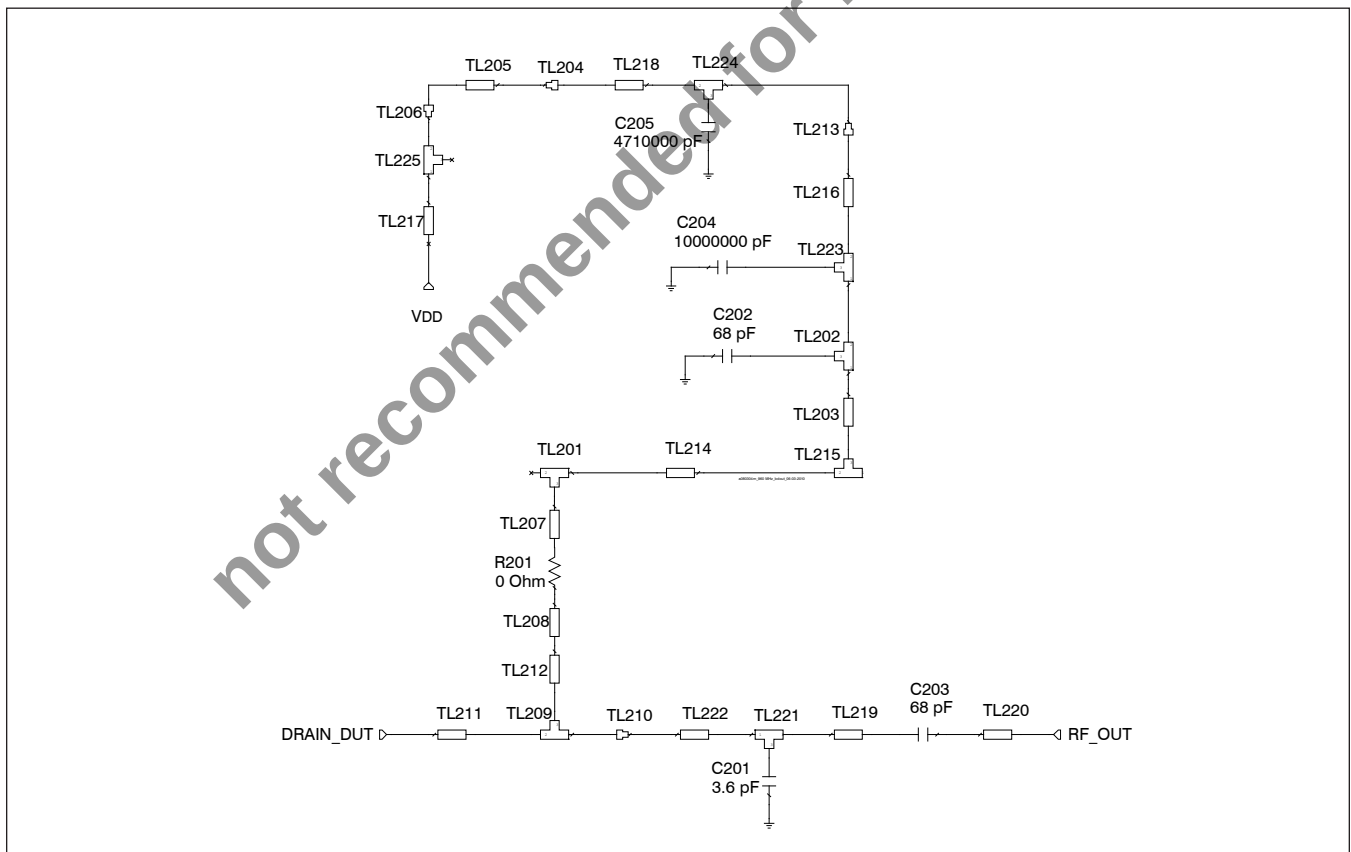


Reference circuit output schematic for $f = 920 - 960$ MHz

Reference Circuit, 920 – 960 MHz (cont.)

Electrical Characteristics at 960 MHz

Transmission Line	Electrical Characteristics	Dimensions: mm	Dimensions: mils
Input			
TL101	0.004 λ , 51.98 Ω	W1 = 1.087, W2 = 1.087, W3 = 0.813	W1 = 43, W2 = 43, W3 = 32
TL102	0.024 λ , 51.98 Ω	W = 1.087, L = 4.445	W = 43, L = 175
TL103	0.011 λ , 51.98 Ω	W = 1.087, L = 2.057	W = 43, L = 81
TL104		W = 1.524	W = 60
TL105	0.008 λ , 54.17 Ω	W = 1.016, L = 1.524	W = 40, L = 60
TL106	0.027 λ , 41.75 Ω	W = 1.524, L = 5.080	W = 60, L = 200
TL107	0.010 λ , 25.04 Ω	W = 3.048, L = 1.778	W = 120, L = 70
TL108	0.003 λ , 41.75 Ω	W = 1.524, L = 0.508	W = 60, L = 20
TL109	0.007 λ , 41.75 Ω	W = 1.524, L = 1.270	W = 60, L = 50
TL110		W1 = 3.048, W2 = 0.762, W3 = 3.048, W4 = 0.762	W1 = 120, W2 = 30, W3 = 120, W4 = 30
TL111, TL112	0.005 λ , 51.98 Ω	W1 = 1.087, W2 = 1.087, W3 = 1.016	W1 = 43, W2 = 43, W3 = 40
TL113	0.017 λ , 51.98 Ω	W = 1.087, L = 3.264	W = 43, L = 129
TL114	0.070 λ , 51.98 Ω	W = 1.087, L = 13.259	W = 43, L = 522
Output			
TL201	0.008 λ , 41.75 Ω	W1 = 1.524, W2 = 1.524, W3 = 1.524	W1 = 60, W2 = 60, W3 = 60
TL202, TL225	0.007 λ , 47.12 Ω	W1 = 1.270, W2 = 1.270, W3 = 1.270	W1 = 50, W2 = 50, W3 = 50
TL203	0.060 λ , 47.12 Ω	W = 1.270, L = 11.361	W = 50, L = 447
TL204		W1 = 0.020, W2 = 0.020, Offset = 0.007	W1 = 20, W2 = 780, Offset = 280
TL205	0.007 λ , 4.74 Ω	W = 20.119, L = 1.270	W = 792, L = 50
TL206		W1 = 0.001, W2 = 0.001, Offset = 0.011	W1 = 1, W2 = 50, Offset = 416
TL207	0.003 λ , 41.75 Ω	W = 1.524, L = 0.508	W = 60, L = 20
TL208	0.008 λ , 41.75 Ω	W = 1.524, L = 1.524	W = 60, L = 60
TL209	0.004 λ , 25.04 Ω	W1 = 3.048, W2 = 3.048, W3 = 0.762	W1 = 120, W2 = 120, W3 = 30
TL210		W1 = 1.087, W2 = 3.048	W1 = 43, W2 = 120
TL211	0.010 λ , 25.04 Ω	W = 3.048, L = 1.778	W = 120, L = 70
TL212	0.007 λ , 63.89 Ω	W = 0.762, L = 1.270	W = 30, L = 50
TL213		W1 = 0.001, W2 = 0.005, Offset = -0.002	W1 = 1, W2 = 208, Offset = -79
TL214	0.044 λ , 41.75 Ω	W = 1.524, L = 8.204	W = 60, L = 323
TL215	0.007 λ , 41.75 Ω	W1 = 1.524, W2 = 1.524, W3 = 1.270	W1 = 60, W2 = 60, W3 = 50
TL216	0.007 λ , 47.12 Ω	W = 1.270, L = 1.267	W = 50, L = 50
TL217	0.032 λ , 47.12 Ω	W = 1.270, L = 5.918	W = 50, L = 233
TL218	0.032 λ , 15.92 Ω	W = 5.283, L = 5.687	W = 208, L = 224
TL219	0.016 λ , 51.98 Ω	W = 1.087, L = 2.946	W = 43, L = 116
TL220	0.017 λ , 51.98 Ω	W = 1.087, L = 3.264	W = 43, L = 129
TL221	0.004 λ , 51.98 Ω	W1 = 1.087, W2 = 1.087, W3 = 0.813	W1 = 43, W2 = 43, W3 = 32
TL222	0.104 λ , 51.98 Ω	W = 1.087, L = 19.736	W = 43, L = 777
TL223	0.011 λ , 47.12 Ω	W1 = 1.270, W2 = 1.270, W3 = 2.032	W1 = 50, W2 = 50, W3 = 80
TL224	0.000 λ , 144.35 Ω	W1 = 0.025, W2 = 0.025, W3 = 0.025	W1 = 1, W2 = 1, W3 = 1

Reference Circuit, 920 – 960 MHz (cont.)

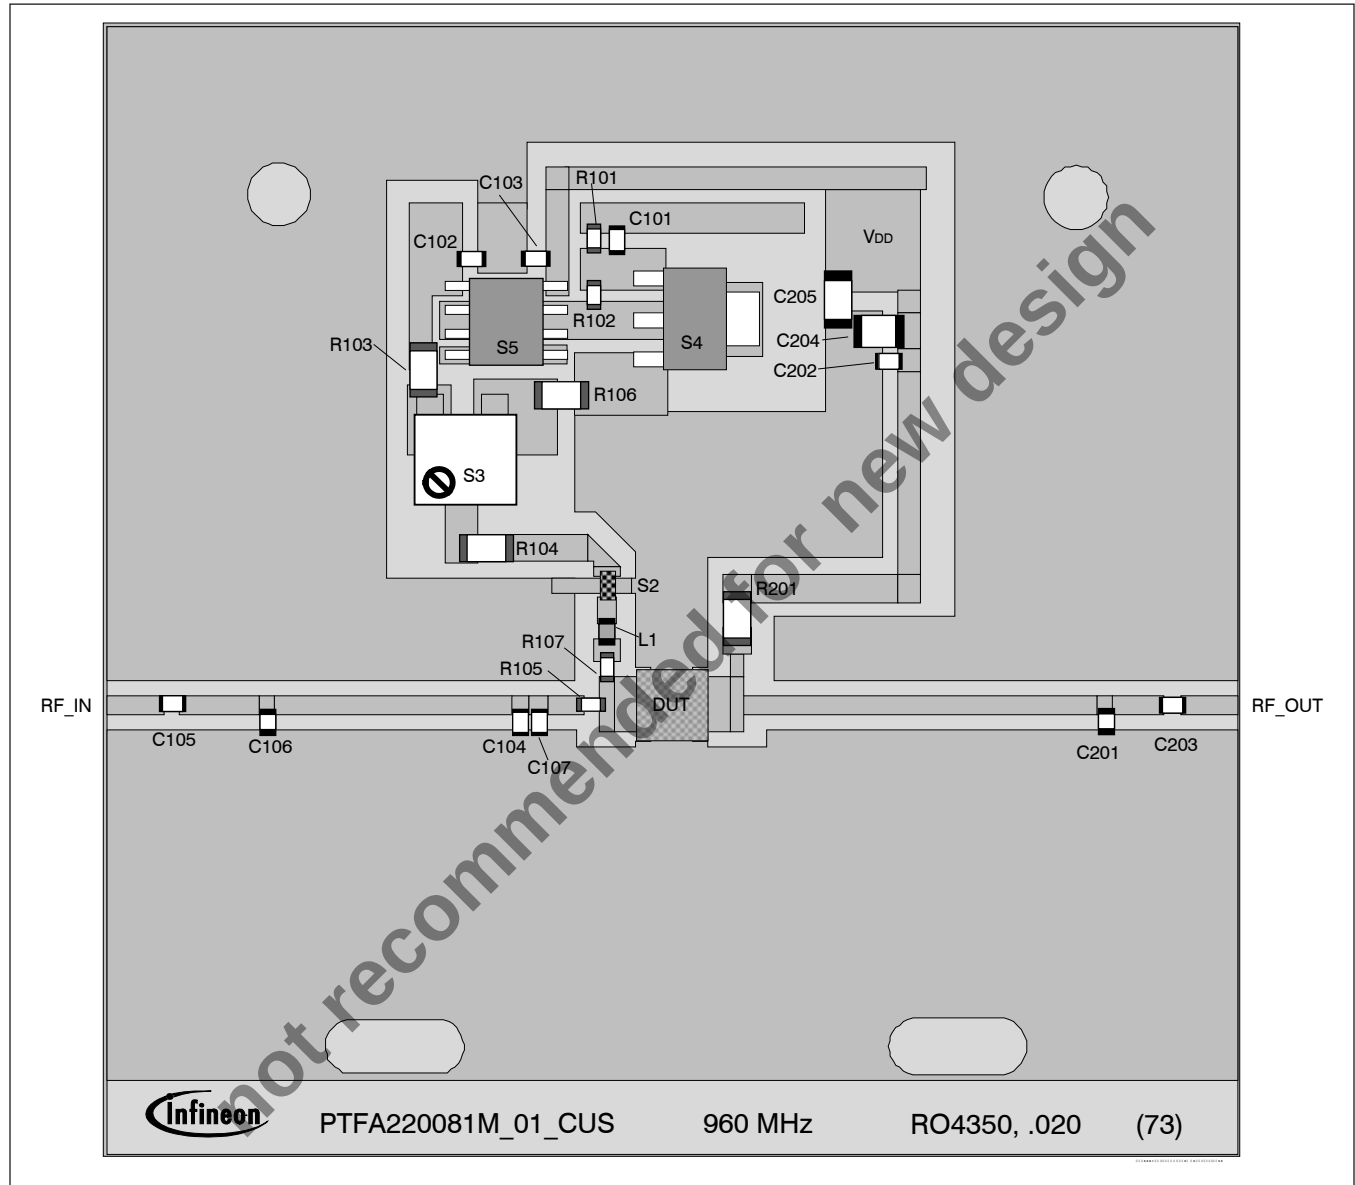

Reference circuit assembly diagram (not to scale)*





Reference Circuit, 920 – 960 MHz (cont.)

Circuit Assembly Information





DUT	PTFA220081M	LDMOS Transistor	
PCB	LTN/PTFA220081M-9	0.508 mm [.020"] thick, $\epsilon_r = 3.48$	Rogers 4350, 1 oz. copper

Component	Description	Suggested Manufacturer	P/N
Input			
C101, C102, C103	Chip capacitor, 1000 pF	Digi-Key	PC01772CT-ND
C104, C107	Chip capacitor, 16 pF	ATC	ATC100A160JW150X
C105	Chip capacitor, 68 pF	ATC	ATC100A680JW150X
C106	Chip capacitor, 5.6 pF	ATC	ATC100A5R6CW150X
L1	Inductor, 22 nH	ATC	ATC0805WL22JT
R101	Resistor, 1300 Ω	Digi-Key	P1.3KGCT-ND
R102	Resistor, 1200 Ω	Digi-Key	P1.2KGCT-ND
R103	Resistor, 2000 Ω	Digi-Key	P2.0KECT-ND
R104	Resistor, 10 Ω	Digi-Key	P10ECT-ND
R105	Resistor, 1.3 Ω	Digi-Key	P1.3GET-ND
R106	Resistor, 510 Ω	Digi-Key	P510ECT-ND
R107	Resistor, 10 Ω	Digi-Key	P10GCT-ND
S2	EMI filter, 2 - 4 A, 0.1 - 2.2 μ F	Murata	NFM18PS105R0J3
S3	Potentiometer, 2k Ω	Digi-Key	3224W-202ECT-ND
S4	Transistor	Digi-Key	BCP56
S5	Voltage Regulator	National Semiconductor	LM7805
Output			
C201	Chip capacitor, 3.6 pF	ATC	ATC100A3R6CW150X
C202, C203	Chip capacitor, 68 pF	ATC	ATC100A680JW150X
C204	Capacitor, 10 μ F	Digi-Key	587-1352-1-ND
C205	Chip capacitor, 4.71 μ F	Digi-Key	PCS3475CT-ND
R201	Resistor, 0 Ω	Digi-Key	P0.0ECT-ND

Typical Performance, 2140 MHz

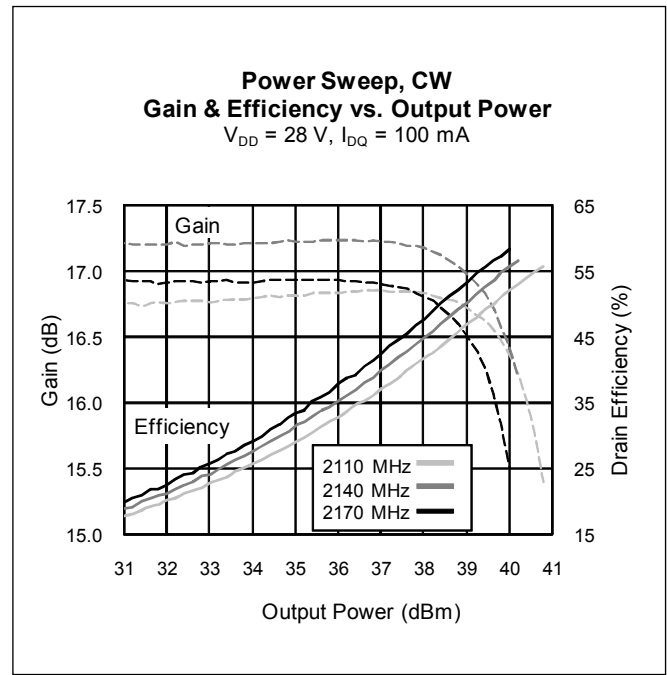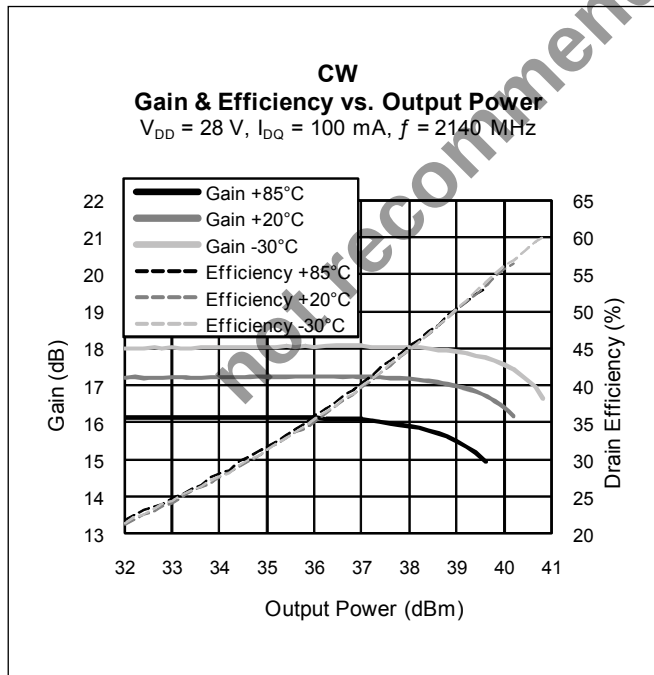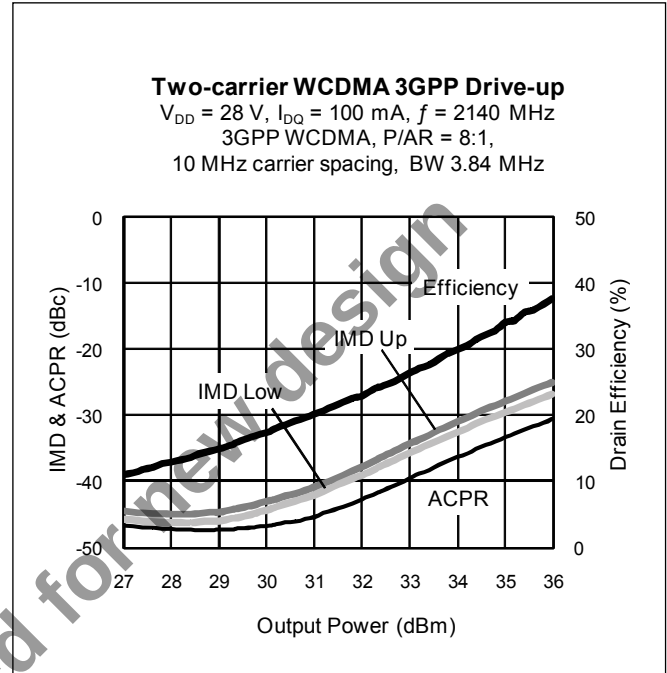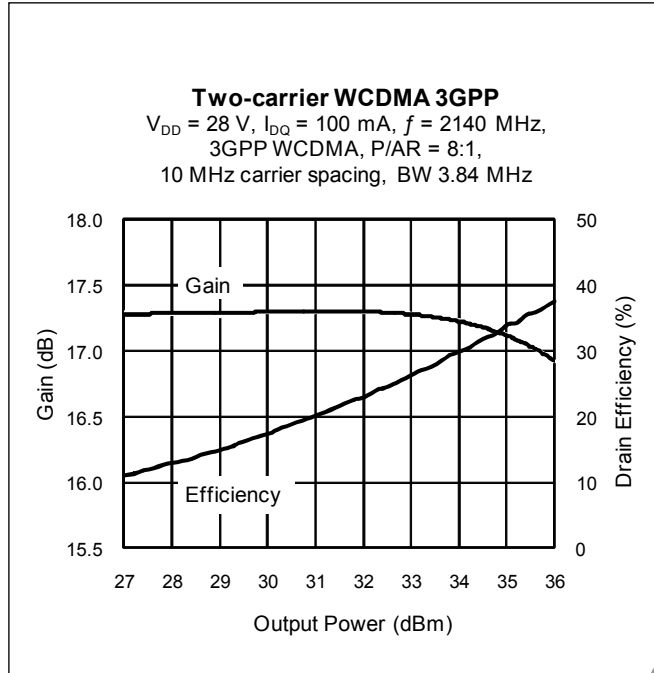


Typical Performance, 2140 MHz (cont.)

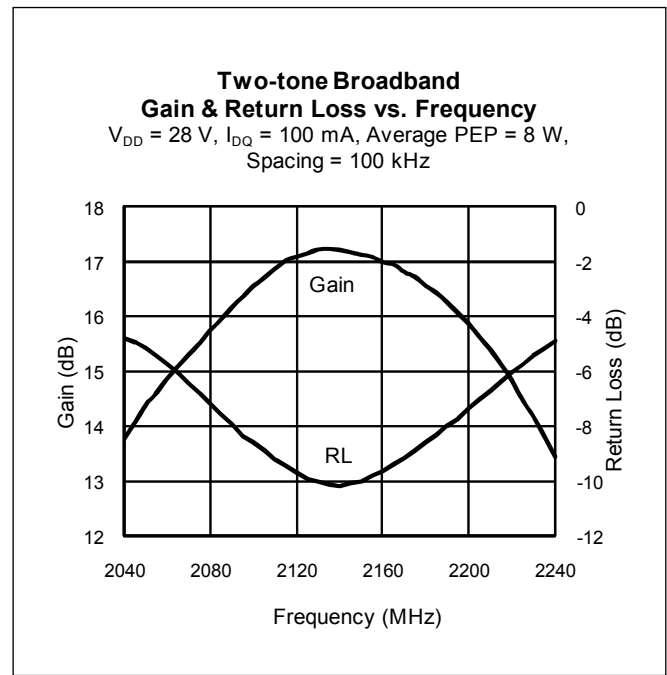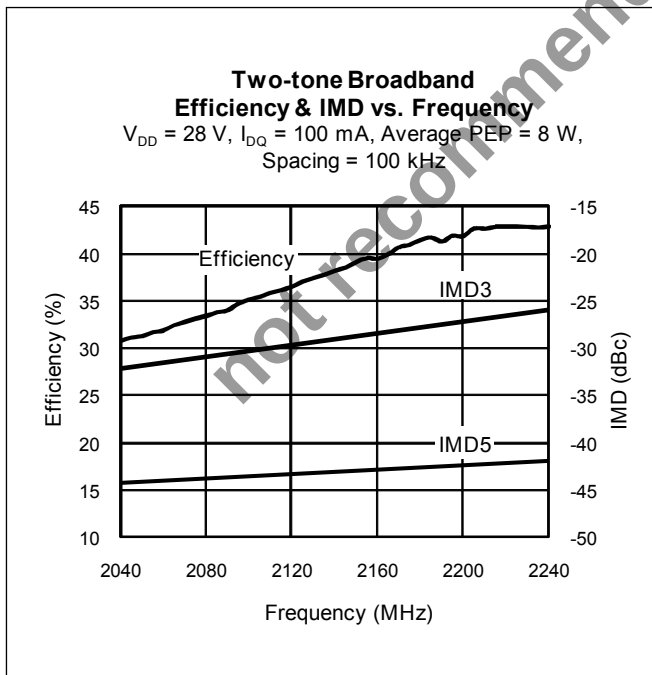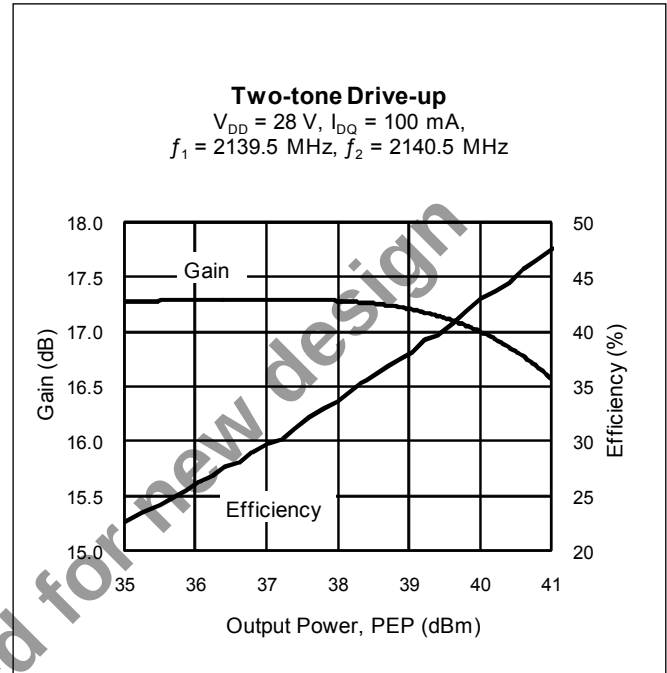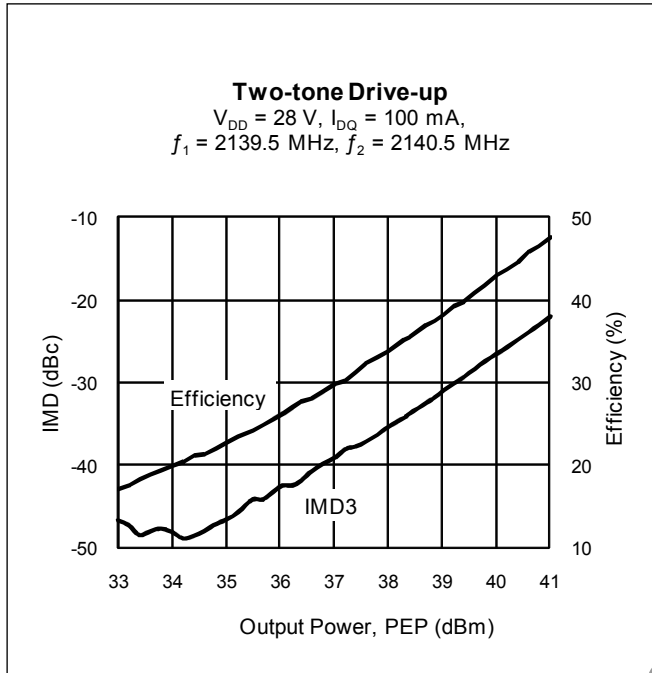

Typical Performance, 2140 MHz (cont.)


Intermodulation Distortion vs. Tone Spacing

$V_{DD} = 28\text{ V}$, $I_{DQ} = 100\text{ mA}$, $f = 2140\text{ MHz}$,
 $PEP = 8\text{ W}$

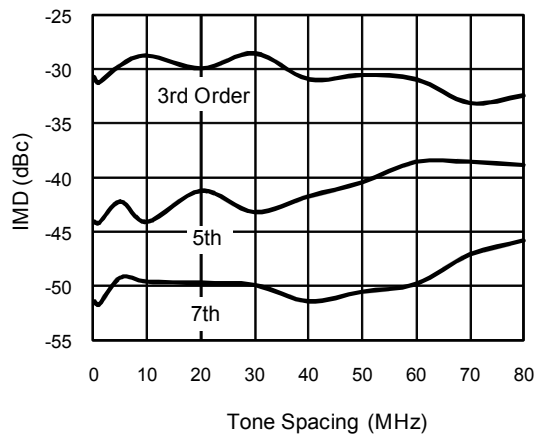


Intermodulation Distortion vs. Output Power

$V_{DD} = 28\text{ V}$, $I_{DQ} = 100\text{ mA}$,
 $f_1 = 2139.5\text{ MHz}$, $f_2 = 2140.5\text{ MHz}$

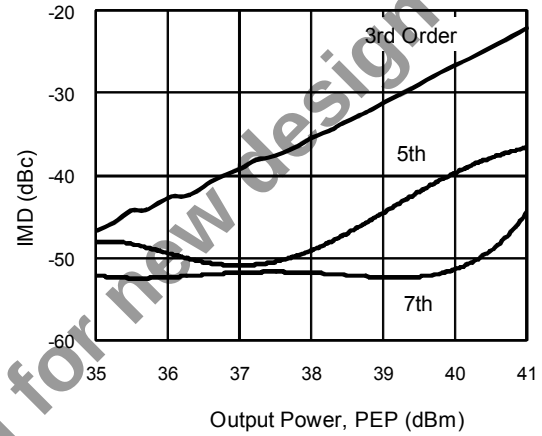


Two-tone Gain vs. Output Power


$V_{DD} = 28\text{ V}$, $f_1 = 2139.5\text{ MHz}$, $f_2 = 2140.5\text{ MHz}$

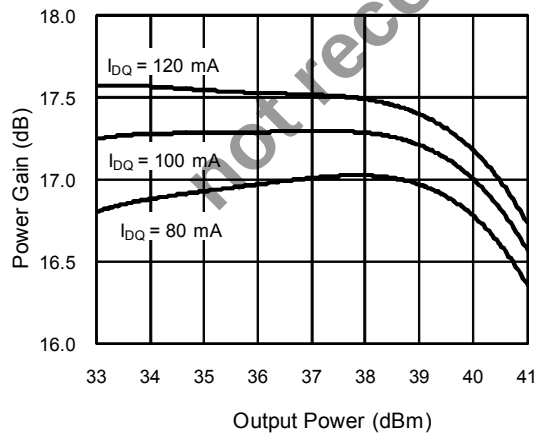

Reference Circuit, 2110 – 2170 MHz

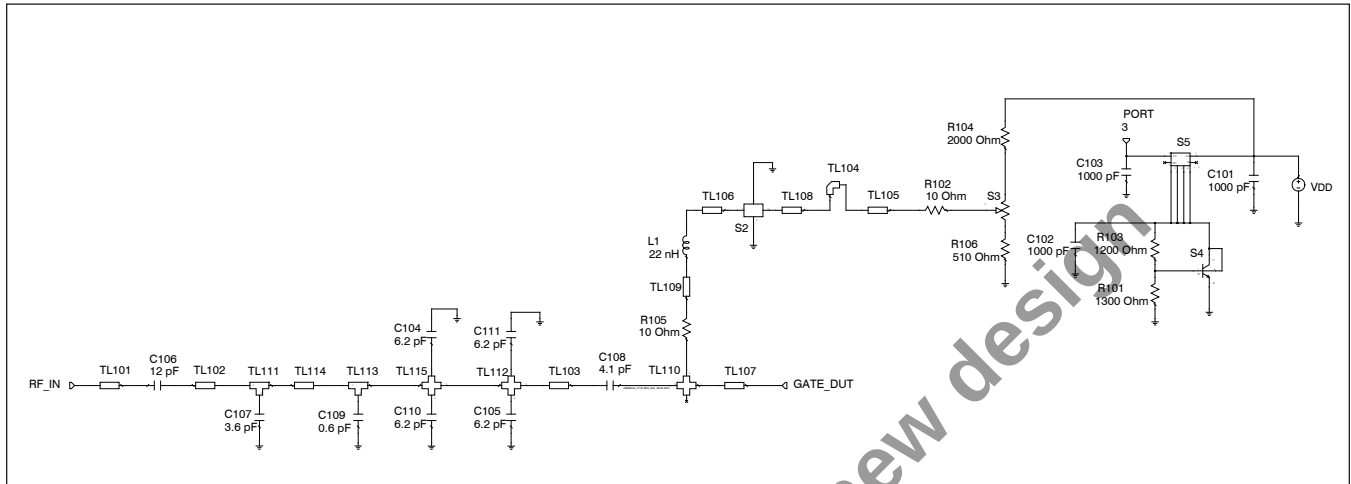

Reference circuit input schematic for $f = 2110 - 2170$ MHz

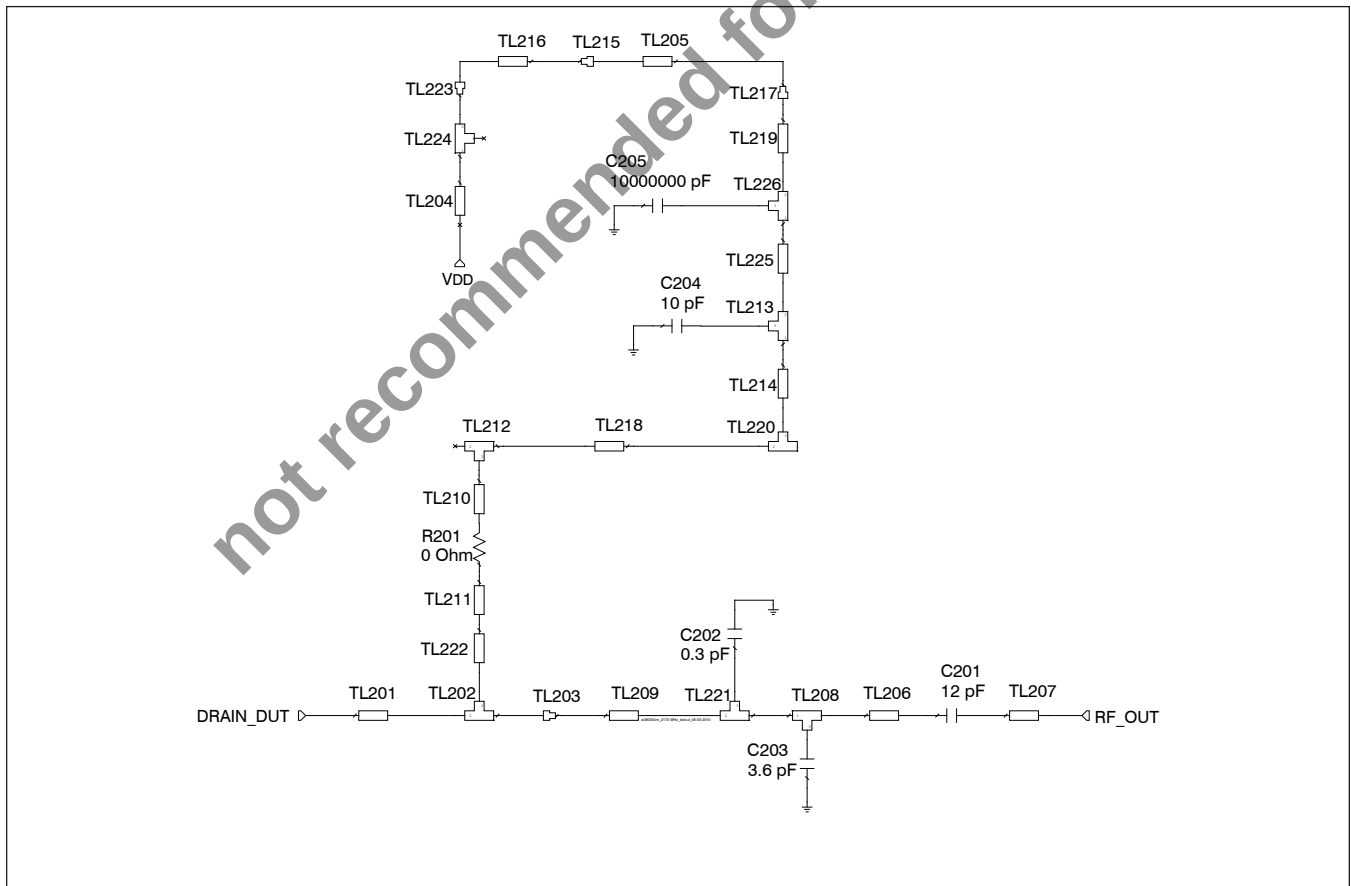

Reference circuit output schematic for $f = 2110 - 2170$ MHz

Reference Circuit, 2110 – 2170 MHz (cont.)

Electrical Characteristics at 2170 MHz

Transmission Line	Electrical Characteristics	Dimensions: mm	Dimensions: mils
Input			
TL101	0.054 λ , 51.98 Ω	W = 1.087, L = 4.509	W = 43, L = 178
TL102	0.150 λ , 51.98 Ω	W = 1.087, L = 12.548	W = 43, L = 494
TL103	0.027 λ , 51.98 Ω	W = 1.087, L = 2.261	W = 43, L = 89
TL104		W = 1.524	W = 60
TL105	0.062 λ , 41.75 Ω	W = 1.524, L = 5.080	W = 60, L = 200
TL106	0.018 λ , 54.17 Ω	W = 1.016, L = 1.524	W = 40, L = 60
TL107	0.022 λ , 25.04 Ω	W = 3.048, L = 1.778	W = 120, L = 70
TL108	0.006 λ , 41.75 Ω	W = 1.524, L = 0.508	W = 60, L = 20
TL109	0.015 λ , 41.75 Ω	W = 1.524, L = 1.270	W = 60, L = 50
TL110		W1 = 3.048, W2 = 0.762, W3 = 3.048, W4 = 0.762	W1 = 120, W2 = 30, W3 = 120, W4 = 30
TL111, TL113	0.012 λ , 51.98 Ω	W1 = 1.087, W2 = 1.087, W3 = 1.016	W1 = 43, W2 = 43, W3 = 40
TL112		W1 = 1.087, W2 = 1.016, W3 = 1.087, W4 = 1.016	W1 = 43, W2 = 40, W3 = 43, W4 = 40
TL114	0.028 λ , 51.98 Ω	W = 1.087, L = 2.311	W = 43, L = 91
TL115		W1 = 1.087, W2 = 1.016, W3 = 1.087, W4 = 1.016	W1 = 43, W2 = 40, W3 = 43, W4 = 40
Output			
TL201	0.022 λ , 25.04 Ω	W = 3.048, L = 1.778	W = 120, L = 70
TL202	0.010 λ , 25.04 Ω	W1 = 3.048, W2 = 3.048, W3 = 0.762	W1 = 120, W2 = 120, W3 = 30
TL203		W1 = 1.087, W2 = 3.048	W1 = 43, W2 = 120
TL204	0.071 λ , 47.12 Ω	W = 1.270, L = 5.918	W = 50, L = 233
TL205	0.072 λ , 15.92 Ω	W = 5.283, L = 5.687	W = 208, L = 224
TL206	0.230 λ , 51.98 Ω	W = 1.087, L = 19.202	W = 43, L = 756
TL207	0.039 λ , 51.98 Ω	W = 1.087, L = 3.264	W = 43, L = 129
TL208	0.012 λ , 51.98 Ω	W1 = 1.087, W2 = 1.087, W3 = 1.016	W1 = 43, W2 = 43, W3 = 40
TL209	0.032 λ , 51.98 Ω	W = 1.087, L = 2.642	W = 43, L = 104
TL210	0.006 λ , 41.75 Ω	W = 1.524, L = 0.508	W = 60, L = 20
TL211	0.018 λ , 41.75 Ω	W = 1.524, L = 1.524	W = 60, L = 60
TL212	0.018 λ , 41.75 Ω	W1 = 1.524, W2 = 1.524, W3 = 1.524	W1 = 60, W2 = 60, W3 = 60
TL213	0.015 λ , 47.12 Ω	W1 = 1.270, W2 = 1.270, W3 = 1.270	W1 = 50, W2 = 50, W3 = 50
TL214	0.035 λ , 47.12 Ω	W = 1.270, L = 2.896	W = 50, L = 114
TL215		W1 = 0.020, W2 = 0.020, Offset = 0.007	W1 = 20, W2 = 780, Offset = 280
TL216	0.017 λ , 4.74 Ω	W = 20.119, L = 1.270	W = 792, L = 50
TL217		W1 = 0.001, W2 = 0.005, Offset = -0.002	W1 = 1, W2 = 208, Offset = -79
TL218	0.099 λ , 41.75 Ω	W = 1.524, L = 8.204	W = 60, L = 323
TL219	0.015 λ , 47.12 Ω	W = 1.270, L = 1.267	W = 50, L = 50
TL220	0.015 λ , 41.75 Ω	W1 = 1.524, W2 = 1.524, W3 = 1.270	W1 = 60, W2 = 60, W3 = 50
TL221	0.008 λ , 51.98 Ω	W1 = 1.087, W2 = 1.087, W3 = 0.635	W1 = 43, W2 = 43, W3 = 25
TL222	0.015 λ , 63.89 Ω	W = 0.762, L = 1.270	W = 30, L = 50
TL223		W1 = 0.001, W2 = 0.001, Offset = 0.011	W1 = 1, W2 = 50, Offset = 416


Table continued next page

Reference Circuit, 2110 – 2170 MHz (cont.)

Electrical Characteristics at 2170 MHz (cont.)

Transmission Line	Electrical Characteristics	Dimensions: mm	Dimensions: mils
TL224	0.015λ , 47.12Ω	$W1 = 1.270$, $W2 = 1.270$, $W3 = 1.270$	$W1 = 50$, $W2 = 50$, $W3 = 50$
TL225	0.111λ , 47.12Ω	$W = 1.270$, $L = 9.225$	$W = 50$, $L = 363$
TL226	0.015λ , 47.12Ω	$W1 = 1.270$, $W2 = 1.270$, $W3 = 1.270$	$W1 = 50$, $W2 = 50$, $W3 = 50$

Reference Circuit, 2110 – 2170 MHz (cont.)

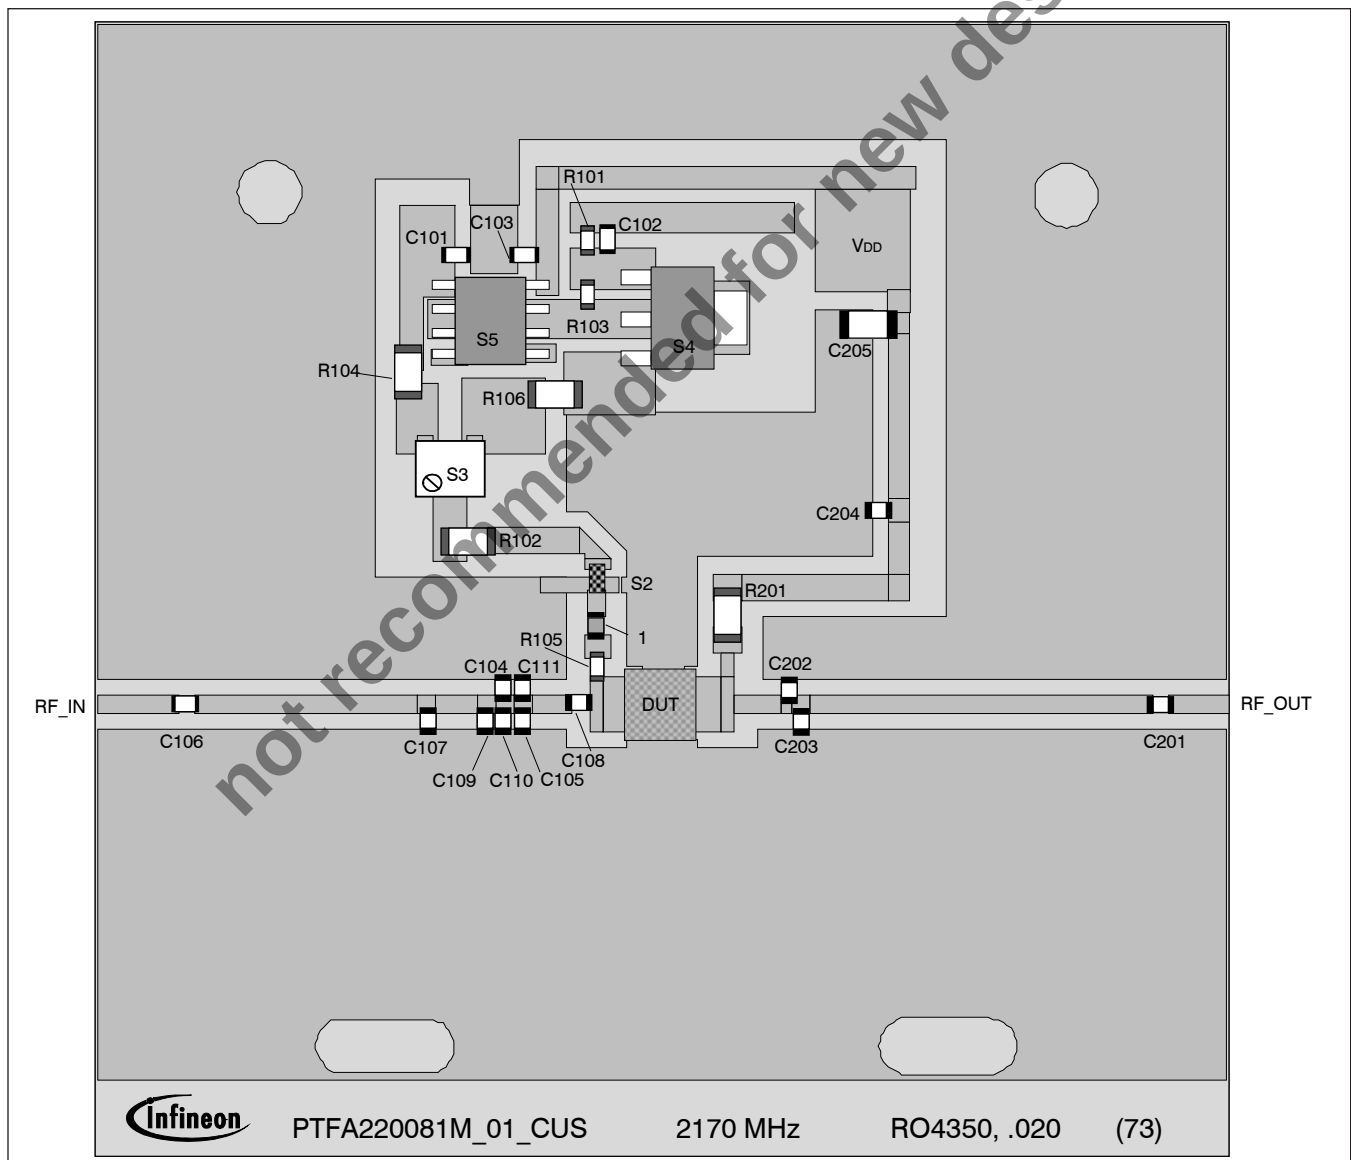

Reference circuit assembly diagram (not to scale)*

* Gerber Files for this circuit available on request

Data Sheet

14 of 17

Rev. 06, 2017-07-18


Reference Circuit, 2110 – 2170 MHz (cont.)

Circuit Assembly Information

DUT	PTFA220081M	LDMOS Transistor	
PCB	LTN/PTFA220081M	0.508 mm [.020"] thick, $\epsilon_r = 3.48$	Rogers 4350, 1 oz. copper

Component	Description	Suggested Manufacturer	P/N
Input			
C101, C102, C103	Chip capacitor, 1000 pF	ATC	PC01772CT-ND
C104, C105, C110, C111	Chip capacitor, 6.2 pF	ATC	ATC100A6R2CW150X
C106	Chip capacitor, 12 pF	ATC	ATC100A120FJW150X
C107	Chip capacitor, 3.6 pF	ATC	ATC100A3R6CW150X
C108	Chip capacitor, 4.1 pF	ATC	ATC100A4R1CW150X
C109	Chip capacitor, 0.6 pF	ATC	ATC100A0R6CW150X
L1	Inductor, 22 nH	ATC	ATC0805WL22JT
R101	Resistor, 1300 Ω	Digi-Key	P1.3KGCT-ND
R102	Resistor, 10 Ω	Digi-Key	P10ECT-ND
R103	Resistor, 1200 Ω	Digi-Key	P1.2KGCT-ND
R104	Resistor, 2000 Ω	Digi-Key	P2.0KECT-ND
R105	Resistor, 10 Ω	Digi-Key	P10GCT-ND
R106	Resistor, 510 Ω	Digi-Key	P510ECT-ND
S2	EMI filter, 2 - 4 A, 0.1 - 2.2 μ F	Digi-Key	NFM18PS105R0J3
S3	Potentiometer, 2k Ω	Digi-Key	3224W-202ECT-ND
S4	Transistor	Digi-Key	BCP56
S5	Voltage Regulator	National Semiconductor	LM7805
Output			
C201	Chip capacitor, 12 pF	ATC	ATC100A120CW150X
C202	Chip capacitor, 0.3 pF	ATC	ATC100A0R3CW150X
C203	Chip capacitor, 3.6 pF	ATC	ATC100A3R6CW150X
C204	Chip capacitor, 10 pF	ATC	ATC100A100CW150X
C205	Capacitor, 10 μ F	Digi-Key	587-1352-1-ND
R201	Resistor, 0 Ω	Digi-Key	P0.0ECT-ND

Package Outline Specifications

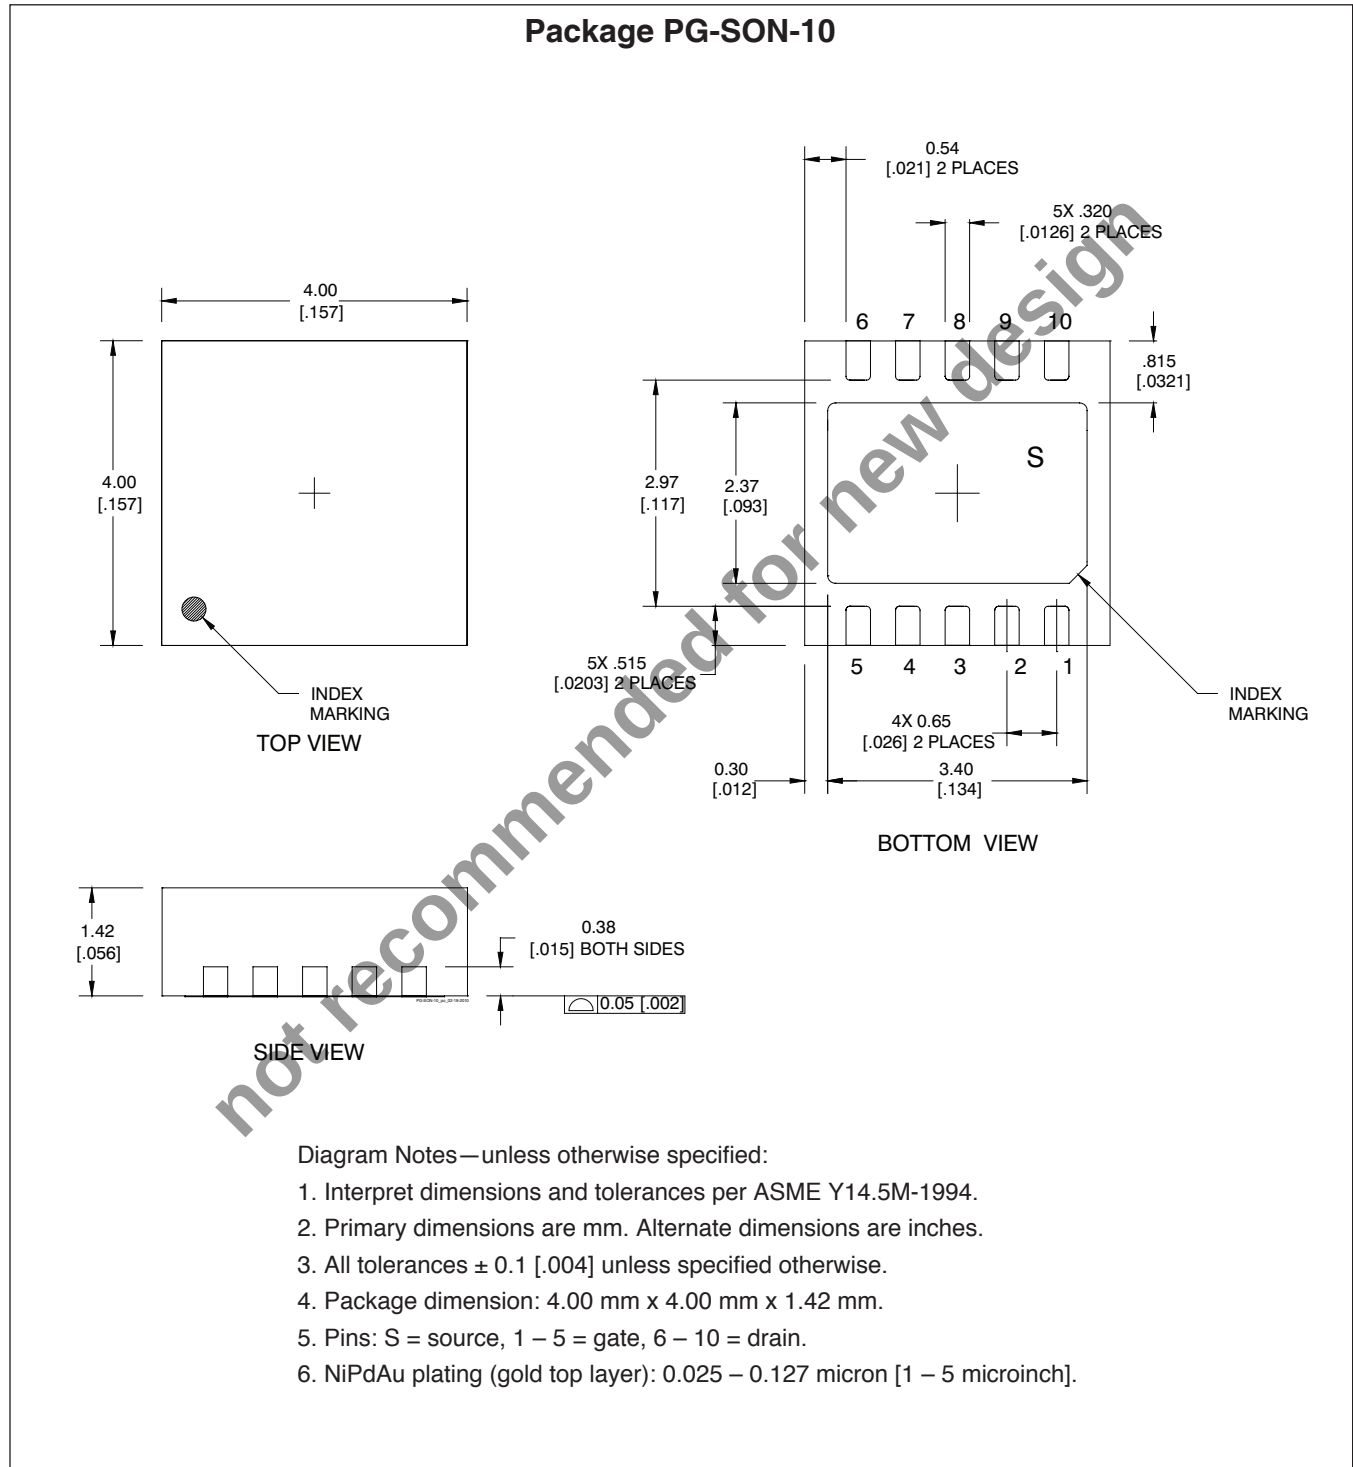

Find the latest and most complete information about products and packaging at the Infineon Internet page
<http://www.infineon.com/rfpower>

Revision History: 2017-07-18

Data Sheet

Previous Version: 2011-04-01, Data Sheet

Page	Subjects (major changes since last revision)
All	Not recommended for new design

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:

+1 877 465 3667 (1-877-GO-LDMOS) USA

or +1 408 776 0600 International



Edition 2017-07-18

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2010 Infineon Technologies AG

All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Data Sheet

17 of 17

Rev. 06, 2017-07-18