

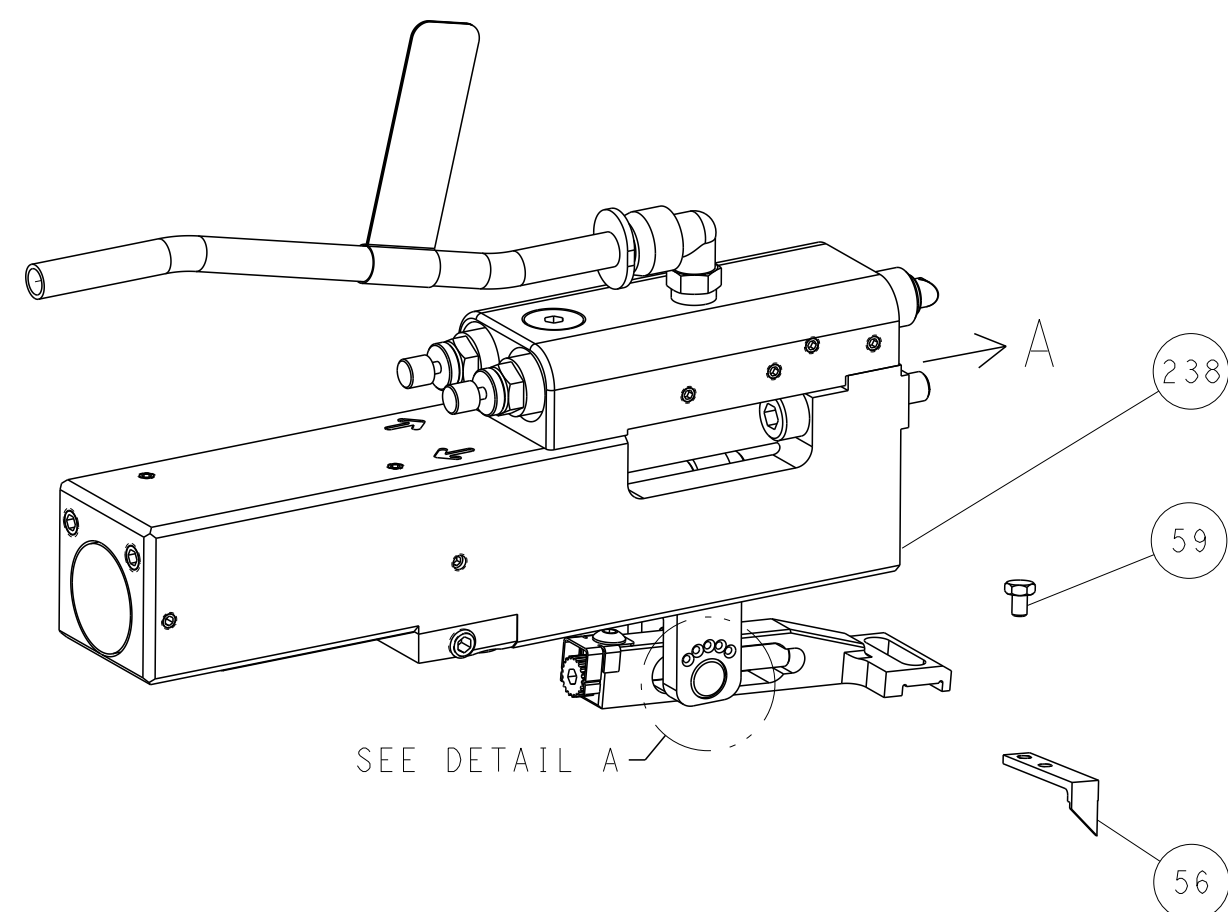



PNEUMATIC

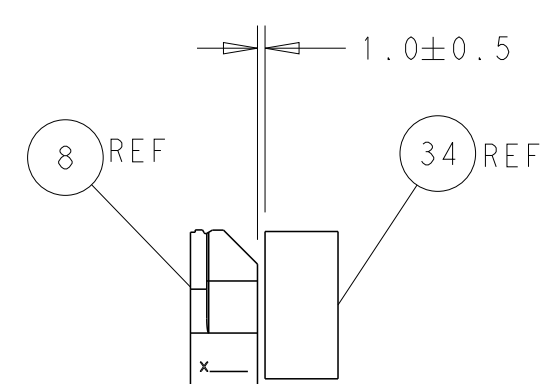


CAM POSITIONS

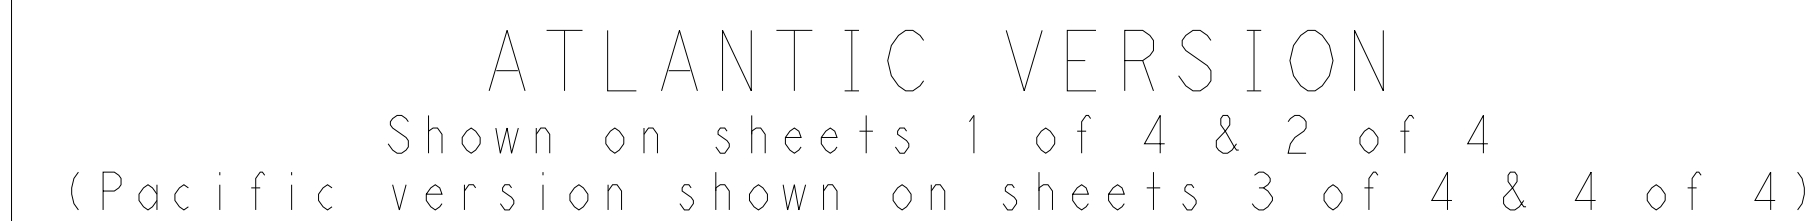

TERMINAL SUPPORT LOCATION

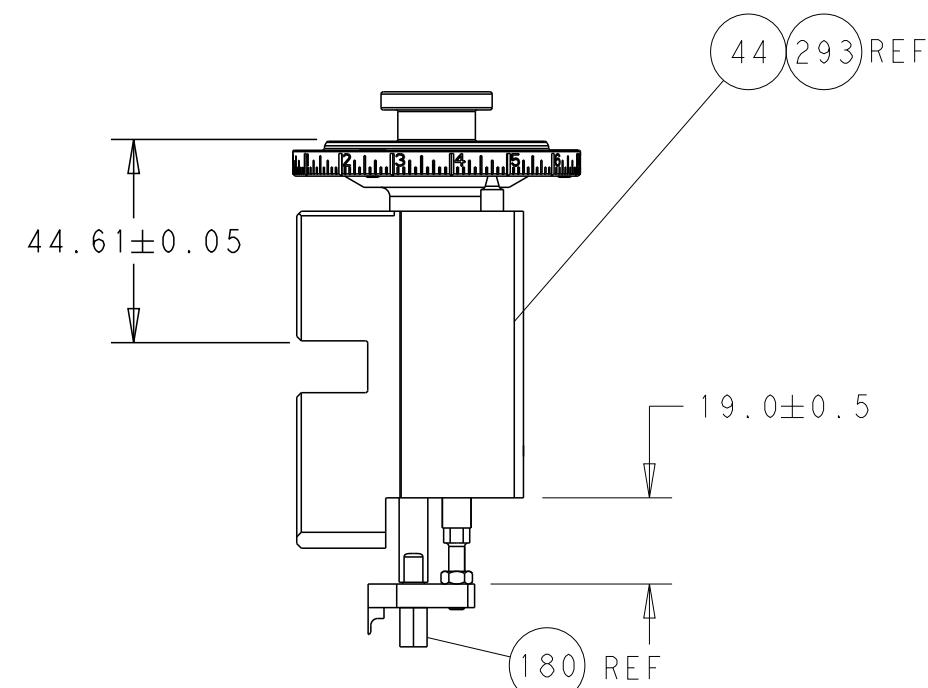

RAM AND HOLDDOWN SET-UP

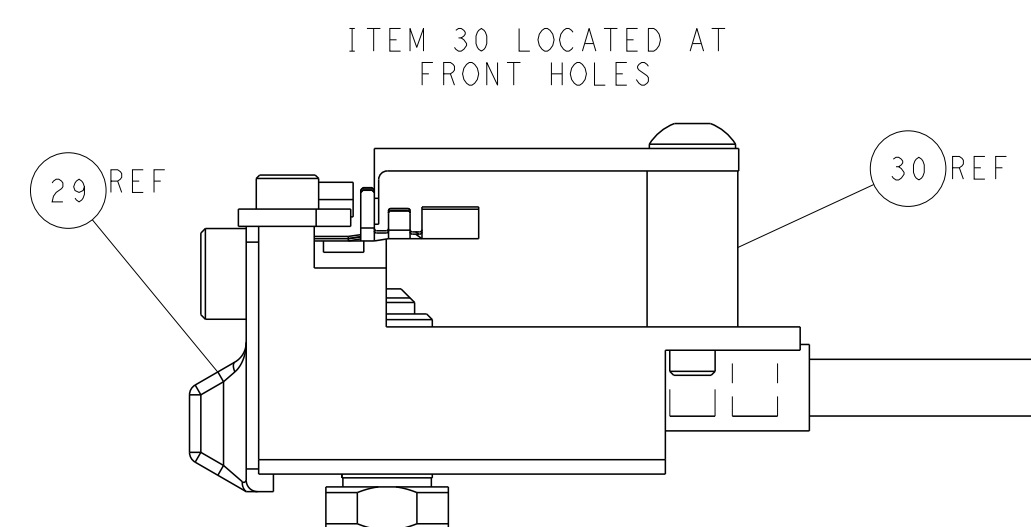

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TFC ELECTRONICS CORPORATION IT IS SUBJECT TO THE TFC POLICY ON CHANGES AND REVISIONS. ANY MODIFICATION SHOULD BE CONTACTED FOR THE LATEST VERSION.						DWN	10NOV2011				TE Connectivity	
 TECHNICAL DRAWING OF A Cylindrical Component: Overall Length: 1.75 ± .005 Overall Diameter: .875 ± .005 Feature 1 (Left): 1 PLC ± .005 Feature 2 (Right): 2 PLC ± .005 Feature 3 (Bottom): 3 PLC ± .005 Feature 4 (Top): 4 PLC ± .005 Angles: Indicated by dimension lines.						CHK	LZHANG 10NOV2011				Harrisburg, PA 17105-3608	
						APVD	S.XI 10NOV2011		NAME			
						DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:				PRODUCT SPEC
						APPLICATION SPEC		Applicator				
						SIZE		CAGE CODE	DRAWING NO.	RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		A 00779		G=2151096		-		
Customer Accessible Production Drawing						SCALE		1:2		SHEET 2 of 4		
										REV M		