

Features

- 3.2 x 2.5 x 0.8 mm miniature package
- Suitable for RoHS compliant reflow
- Wide Operating Temperature (-40°C to +85°C)

Applications



- Crystal approved for use with Raspberry Pi 's RP2040 and RP235x range of microcontroller products

Key Electrical Specifications


Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency	12.000			MHz	
Operation Mode	Fundamental-AT				
Operating Temperature	-40		+85	°C	
Storage Temperature	-55		+125	°C	
Frequency Tolerance at +25 °C	-30		+30	ppm	
Frequency Stability over the Operating Temperature (ref. to +25°C)	-30		+30	ppm	
Equivalent series resistance (R1)			50	Ω	
Shunt Capacitance (C0)			3.0	pF	
Load capacitance (CL)	10			pF	
Drive Level		10	200	μW	
Aging	-5		+5	ppm	@25±3°C, 1st year
Insulation Resistance	500			MΩ	@100Vdc±15V

ABM8-272-T3 is RoHS/RoHS II Compliant and Pb free

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = 1

 ABRACON	ABM8-272-T3 Ultra Miniature Ceramic SMD Crystal	 RoHS Compliant
Date of Issue: Sept. 16 th , 2024	3.2 x 2.5 x 0.8mm	Application <input type="checkbox"/> Safety <input checked="" type="checkbox"/> Non-safety
<i>Page (4) of (9)</i>	Abracon Drawing # 456603	Revision #: B

Mechanical Dimensions

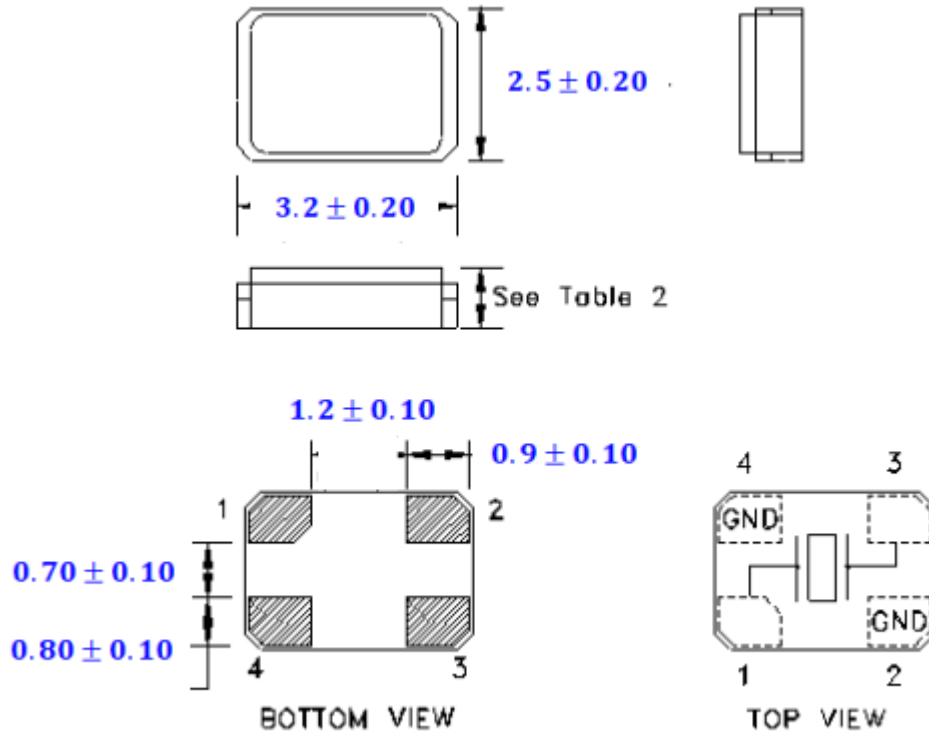


Note: Due to material availability, the chamfer could be located on pin #1, 3, or 4. Be advised that the chamfer location has no impact on the electrical performance of the device.

Dimensions: mm

Packaging:

Tape and Reel (3,000pcs/reel)

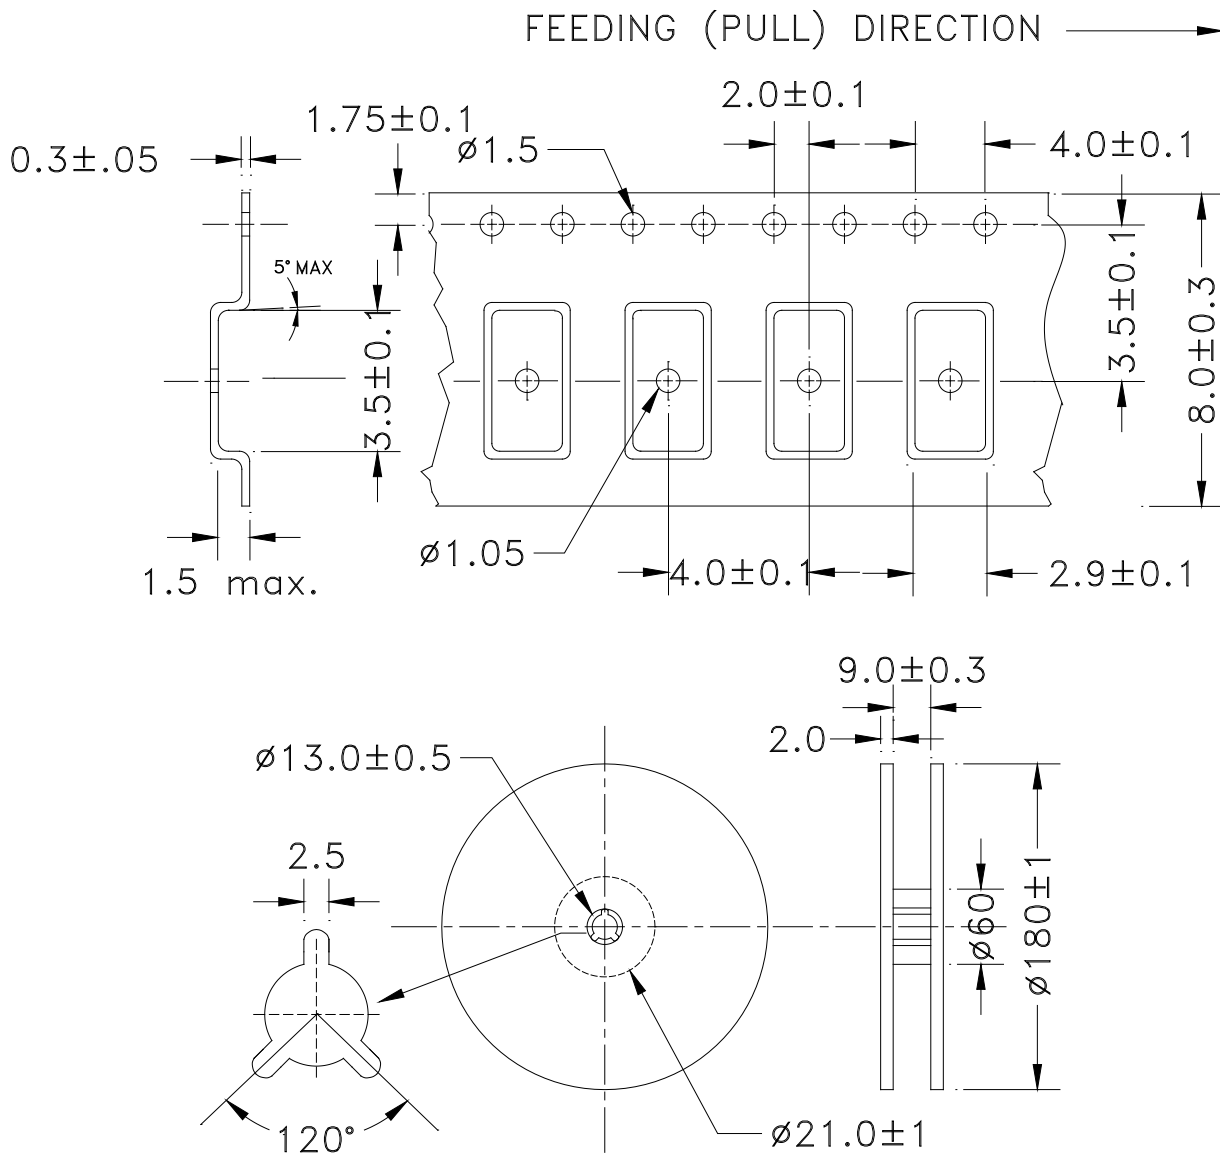
Dimensions: mm