High Output Current, Rail-to-Rail Input/Output Quad CMOS Operational Amplifier

■GENERAL DESCRIPTION

The NJU7044 is a Rail-to-Rail Input/Output quad CMOS operational amplifier.

Based on C-MOS technology, there are excellent features such as high output current, low current consumption, low operating voltage, and very high input impedance.

■PACKAGE OUTLINE

Discontinued



NJU7044D
(DIP14)



NJU7044M
(DMP14)



NJU7044V
(SSOP14)

FEATURES

●Operating Voltage	2.2V to 5.5V
●Rail-to-Rail Input/Output	
●Ground Sensing	
●High Output Current:	40mA (short-circuit current)
●Input Offset Voltage	V_{IO}=10mV max.
●Input Common Mode Voltage Range	V_{SS} to V_{DD}
●Supply Current	I_{DD}=1.4mA typ. (at V_{DD}=3V)
●High Input Impedance	1TΩ Typ.
●Low Input Bias Current:	I_{IB}=1pA typ.
●Package	DIP14 (Discontinued), DMP14, SSOP14

■ PIN CONFIGURATION

(Top View)

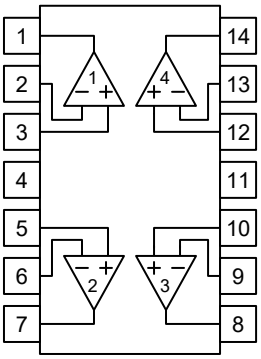

NJU7044D (Discontinued)
NJU7044M
NJU7044V

Pin Function

1. OUTPUT 1
2. -INPUT 1
3. +INPUT 1
4. V_{DD}
5. +INPUT 2
6. -INPUT 2
7. OUTPUT 2
8. OUTPUT 3
9. -INPUT 3
10. +INPUT 3
11. V_{SS}
12. +INPUT 4
13. -INPUT 4
14. OUTPUT 4

Downloaded from Arrow.com.

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{DD}	7	V
Common Mode Input Voltage Range	V_{ICM}	0~7(Note1)	V
Differential Input Voltage Range	V_{ID}	±7	V
Power Dissipation	P_D	DIP14: 700 DMP14: 300, 500(Note2), 660(Note3) SSOP14: 300, 450(Note2), 570(Note3)	mW
Output Sink/Source Current for each one output terminal	Ioport	±75	mA
Sum total of Output Sink/Source Current of all output terminal	Iototal	180(Note4)	mA
Operating Temperature Range	T_{OPR}	-40~+85	ºC
Storage Temperature Range	T_{STG}	-55~+125	ºC

(Note1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

(Note2) On the PCB " EIA/JEDEC (76.2x11.43x1.6mm, two layers, FR-4) "

(Note3) On the PCB " EIA/JEDEC (76.2x11.43x1.6mm, four layers, FR-4) "

(Note4) It individually takes the absolute value of the sink current and the source current of each output terminal, and it is assumed the sum total.
Calculation type: Iototal=|Ioport1|+|Ioport2|+|Ioport3|+|Ioport4|

(Note5) Do not exceed "Power dissipation: P_D" in which power dissipation in IC is shown by the absolute maximum rating.
Refer to following Figure 1 and Figure 2 for a permissible loss when ambient temperature (Ta) is Ta≥25ºC.

Figure 1 : Power Dissipation - Ambient Temperature

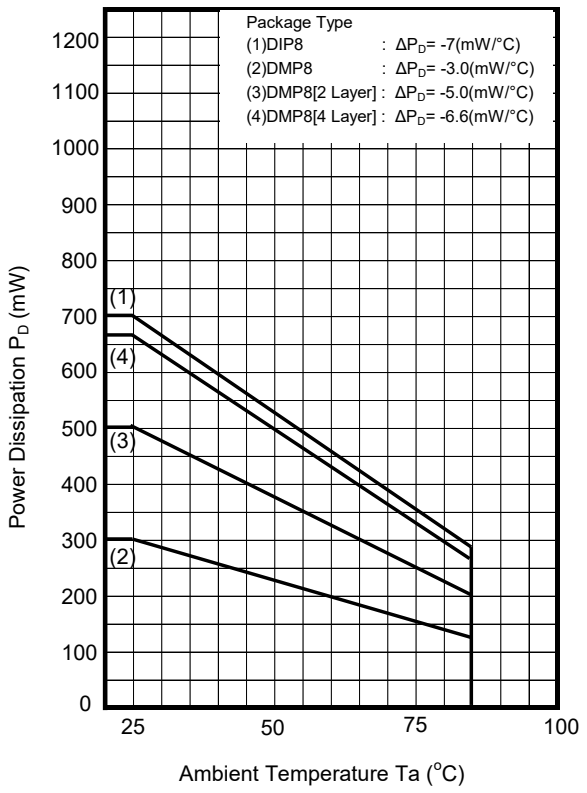

Figure 2 : Power Dissipation - Ambient Temperature

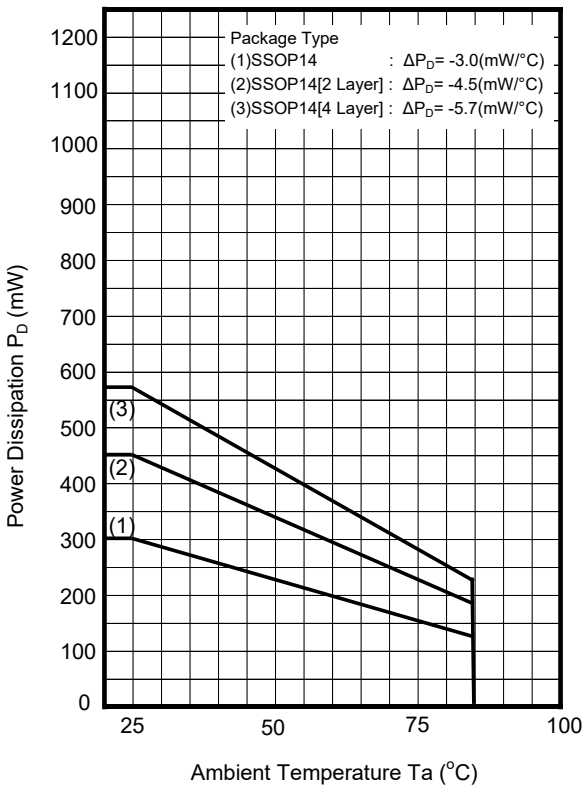

■ RECOMMENDED OPERATING CONDITIONS (Ta=25ºC)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{DD}	2.2 to 5.5	V

Downloaded from Arrow.com.

■ ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS (V_{DD}=5V, Ta=25ºC, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I_{DD}	No Signal	-	1.8	2.8	mA
Input Offset Voltage	V_{IO}		-	-	10	mV
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Voltage Gain	A_V	R_L=10kΩ to 2.5V, Vo=2.5V±2.4V	70	90	-	dB
Common Mode Rejection Ratio	CMR	(Note6)	44	60	-	dB
Supply Voltage Rejection Ratio	SVR	4.0V ≤ V_{DD} ≤ 5.5V, V_{CM}=2.5V	55	85	-	dB
Maximum Output Voltage1	V_{OH}1	R_L=10kΩ to 2.5V	4.95	-	-	V
	V_{OL}1	R_L=10kΩ to 2.5V	-	-	0.05	V
Maximum Output Voltage2	V_{OH}2	R_L=600Ω to 2.5V	4.88	-	-	V
	V_{OL}2	R_L=600Ω to 2.5V	-	-	0.12	V
Output Source Current	I_{SOURCE}	V_O=3.5V (Note7)	50	-	-	mA
Output Sink Current	I_{SINK}	V_O=1.5V (Note7)	50	-	-	mA
Common Mode Input Voltage Range	V_{ICM}	CMR ≥ 44dB	0	-	5	V

(Note6) CMR is represented by either "V_{CM}=0V to 2.5V" or "V_{CM}=2.5V to 5V" has lower value.
(Note7) Please note the output current value to exceed neither Ioport nor Iototal the absolute maximum rating.

●AC CHARACTERISTICS (V_{DD}=5V,Ta=25ºC, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GB	R_L=10kΩ to 2.5V	-	0.8	-	MHz
Total Harmonic Distortion	THD	f=1kHz, V_O=0.7Vrms, A_V=+1, R_L=10kΩ to 2.5V	-	0.001	-	%
Equivalent Input Noise Voltage	V_{NI}	f=1kHz	-	40	-	nV/√Hz
Channel Separation	CS	f=1kHz , Vo=3Vpp, R_L=10kΩ to 2.5V	-	120	-	dB

●TRANSIENT CHARACTERISTICS (V_{DD}=5V,Ta=25ºC, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R_L=10kΩ to 2.5V	-	0.8	-	V/µs

Downloaded from Arrow.com.

■ ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS (V_{DD}=3V, Ta=25˚C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I_{DD}	No Signal	-	1.4	2.4	mA
Input Offset Voltage	V_{IO}		-	-	10	mV
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Voltage Gain	A_V	R_L=10kΩ to 1.5V, Vo=1.5V±1.4V	70	90	-	dB
Common Mode Rejection Ratio	CMR	(Note8)	42	60	-	dB
Supply Voltage Rejection Ratio	SVR	2.7V ≤ V_{DD} ≤ 4.0V, V_{CM}=1.5V	50	80	-	dB
Maximum Output Voltage1	V_{OH}1	R_L=10kΩ to 1.5V	2.95	-	-	V
	V_{OL}1	R_L=10kΩ to 1.5V	-	-	0.05	V
Maximum Output Voltage2	V_{OH}2	R_L=600Ω to 1.5V	2.9	-	-	V
	V_{OL}2	R_L=600Ω to 1.5V	-	-	0.1	V
Output Source Current	I_{SOURCE}	V_O=1.5V	30	40	-	mA
Output Sink Current	I_{SINK}	V_O=1.5V	30	40	-	mA
Common Mode Input Voltage Range	V_{ICM}	CMR ≥ 42dB	0	-	3	V

(Note8) CMR is represented by either "V_{CM}=0V to 1.5V" or "V_{CM}=1.5V to 3V" has lower value.

●AC CHARACTERISTICS (V_{DD}=3V, Ta=25˚C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GB	R_L=10kΩ to 1.5V	-	0.8	-	MHz
Total Harmonic Distortion	THD	f=1kHz, V_O=0.35Vrms, A_V=+1, R_L=10kΩ to 1.5V	-	0.002	-	%
Equivalent Input Noise Voltage	V_{NI}	f=1kHz	-	40	-	nV/√Hz
Channel Separation	CS	f=1kHz, Vo=1.8Vpp, R_L=10kΩ to 1.5V	-	115	-	dB

●TRANSIENT CHARACTERISTICS (V_{DD}=3V, Ta=25˚C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R_L=10kΩ to 1.5V	-	0.7	-	V/μs

Downloaded from Arrow.com.

●DC CHARACTERISTICS (V_{DD}=2.2V, Ta=25˚C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I_{DD}	No Signal	-	1.2	2	mA
Input Offset Voltage	V_{IO}		-	-	10	mV
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Voltage Gain	A_V	R_L=10kΩ to 1.1V, Vo=1.1V±1.0V	70	90	-	dB
Common Mode Rejection Ratio	CMR	(Note9)	30	60	-	dB
Supply Voltage Rejection Ratio	SVR	2.2V ≤ V_{DD} ≤ 2.7V, V_{CM}=1.1V	45	70	-	dB
Maximum Output Voltage1	V_{OH}1	R_L=10kΩ to 1.1V	2.15	-	-	V
	V_{OL}1	R_L=10kΩ to 1.1V	-	-	0.05	V
Maximum Output Voltage2	V_{OH}2	R_L=600Ω to 1.1V	2.1	-	-	V
	V_{OL}2	R_L=600Ω to 1.1V	-	-	0.1	V
Output Source Current	I_{SOURCE}	V_O=1.1V	10	15	-	mA
Output Sink Current	I_{SINK}	V_O=1.1V	10	15	-	mA
Common Mode Input Voltage Range	V_{ICM}	CMR ≥ 30dB	0	-	2.2	V

(Note 9) CMR is represented by either "V_{CM}=0V to 1.1V" or "V_{CM}=1.1V to 2.2V" has lower value.

●AC CHARACTERISTICS (V_{DD}=2.2V, Ta=25˚C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GB	R_L=10kΩ to 1.1V	-	0.8	-	MHz
Total Harmonic Distortion	THD	f=1kHz, V_O=0.18Vrms, A_V=+1, R_L=10kΩ to 1.1V	-	0.004	-	%
Equivalent Input Noise Voltage	V_{NI}	f=1kHz	-	40	-	nV/√Hz
Channel Separation	CS	f=1kHz, Vo=1.2Vpp, R_L=10kΩ to 1.1V	-	110	-	dB

●TRANSIENT CHARACTERISTICS (V_{DD}=2.2V, Ta=25˚C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R_L=10kΩ to 1.1V	-	0.6	-	V/μs

Downloaded from Arrow.com.

●Typical Characteristics

Supply Current vs. Supply Voltage
(Ambient Temperature)
No Signal, A_V=0dB

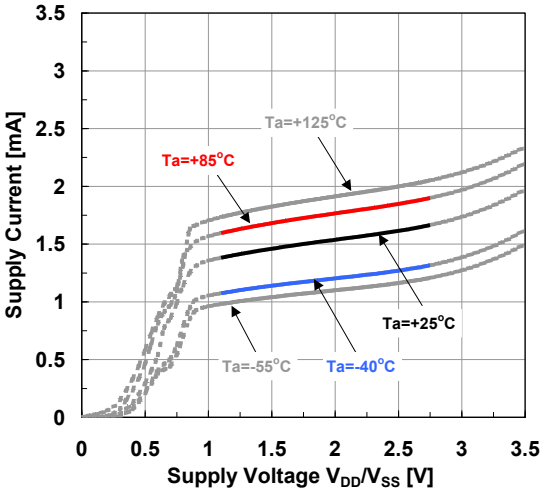

Supply Current vs. Ambient Temperature
No Signal, A_V=0dB

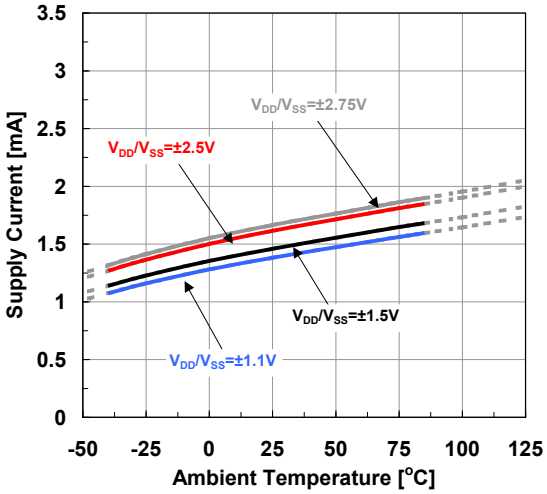

Input Offset Voltage vs. Supply Voltage
(Ambient Temperature)
No Signal, A_V=0dB

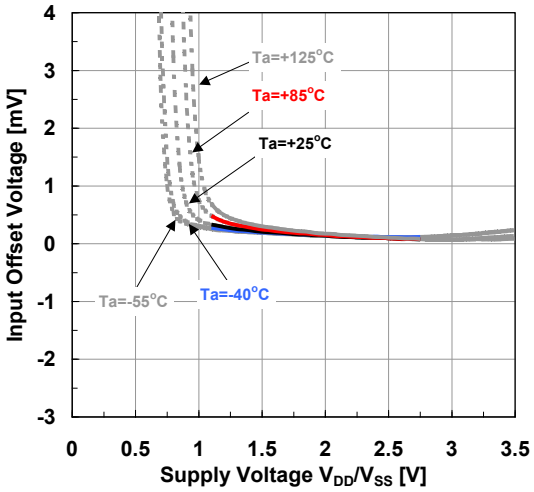

Input Offset Voltage
vs. Ambient Temperature
No Signal, A_V=0dB

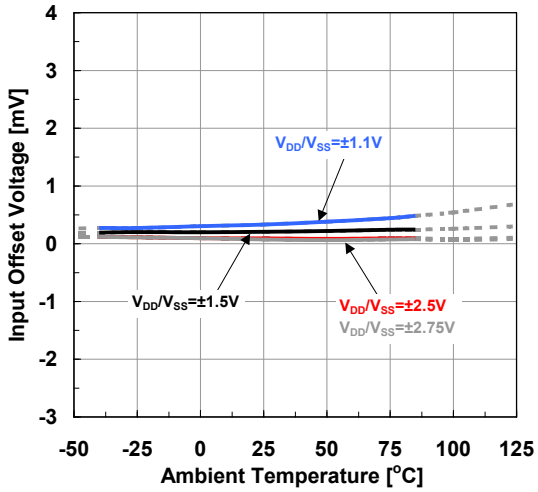

Input Offset Voltage
vs. Input Common Mode Voltage
V_{DD}/V_{SS}=±1.5V, R_L=10kΩ

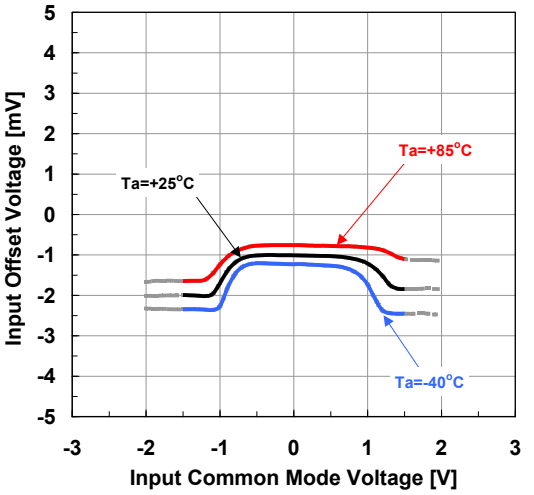

Maximum Output Voltage
vs. Ambient Temperature
G_V=OPEN, R_L=600Ω

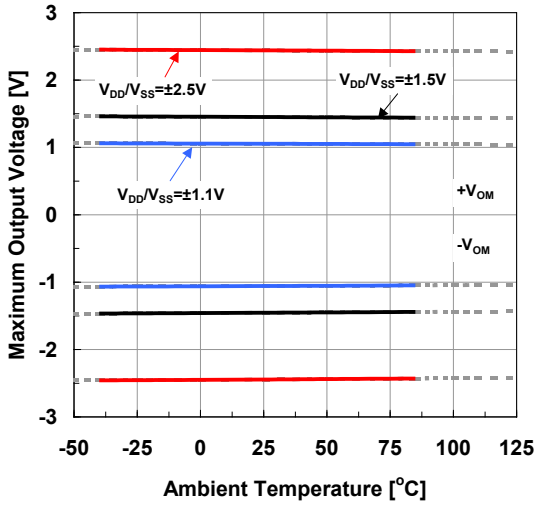

Downloaded from Arrow.com.

●Typical Characteristics

Maximum Output Voltage vs. Output Current
(Ambient Tmeperature)
V_{DD}/V_{SS}=±1.5V, G_V=OPEN

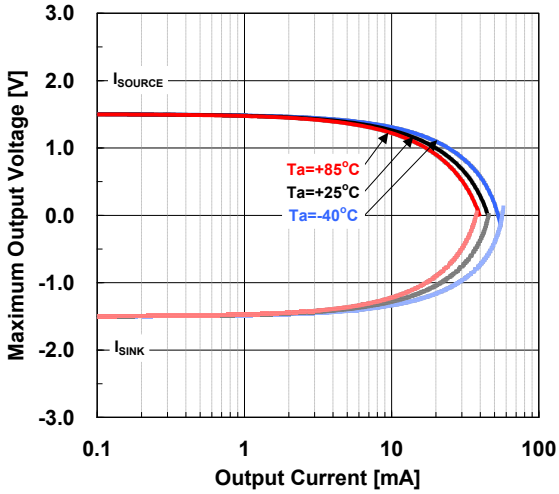

Maximum Output Voltage
vs. Capacitive Load
(Ambient Temperature)
V_{DD}/V_{SS}=±1.5V, G_V=OPEN

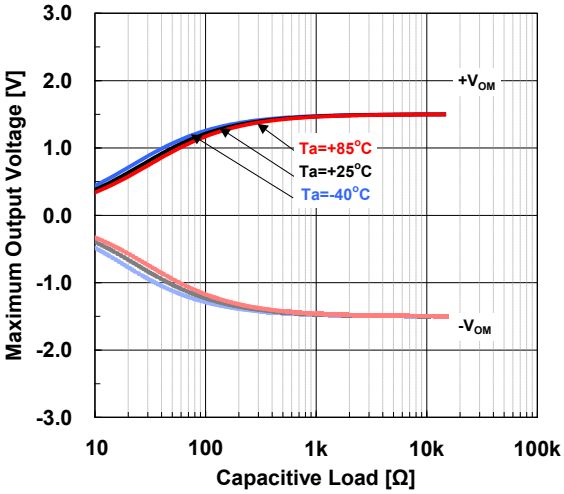

Maximum Output Voltage vs. Output Current
G_V=OPEN, Ta=+25°C

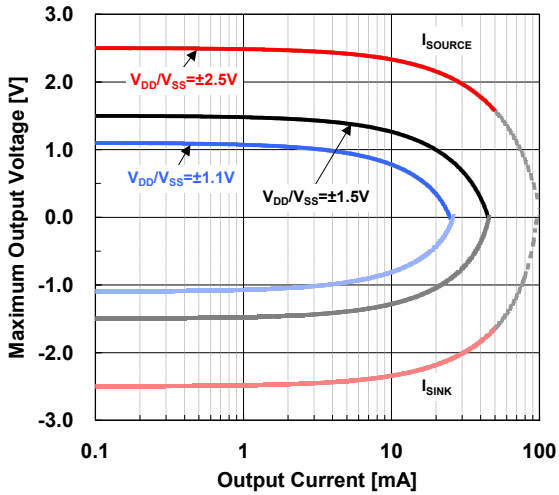

Maximum Output Voltage
vs. Capacitive Load
(Supply Voltage)
G_V=OPEN, Ta=+25°C

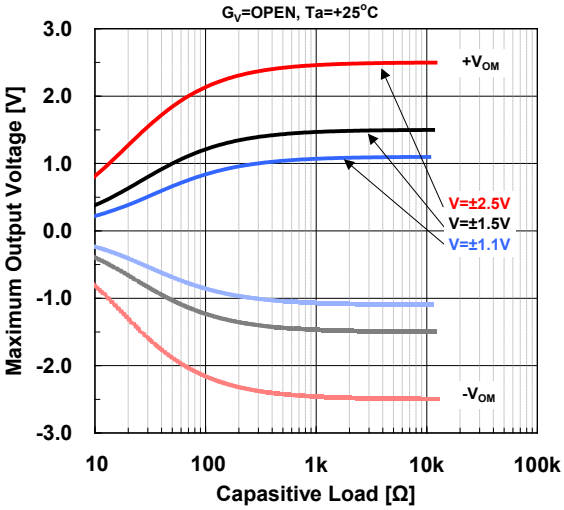

Common Mode Rejection Ratio
vs. Ambient Temperature
CMR- : GND≤V_{CM}≤V_{DD}/2

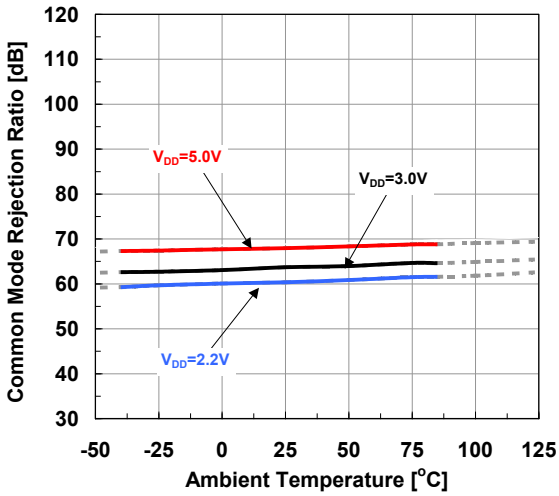

Supply Voltage Rejection Ratio
vs. Ambient Temperature
No Signal, A_V=0dB

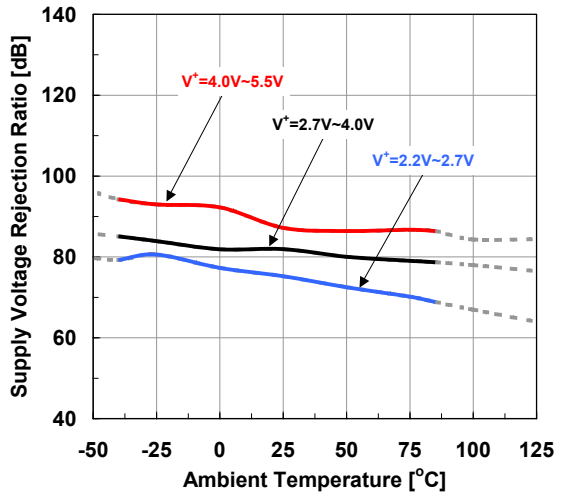

Downloaded from Arrow.com.

●Typical Characteristics

Voltage Gain/Phase vs. Frequency

(Ambient Temperature)

V_{DD}/V_{SS}=±1.5V, G_V=40dB, R_F=100kΩ,
R_G=1kΩ, R_L=10kΩ, C_L=3pF, V_{IN}=-30dBm

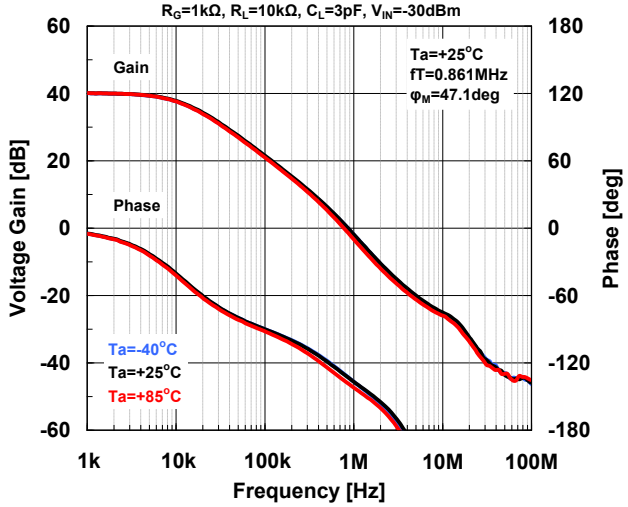

Voltage Gain/Phase vs. Frequency

(Load Capacitance)

V_{DD}/V_{SS}=±1.5V, G_V=40dB, R_F=100kΩ,
R_G=1kΩ, R_L=10kΩ, V_{IN}=-30dBm, Ta=+25°C

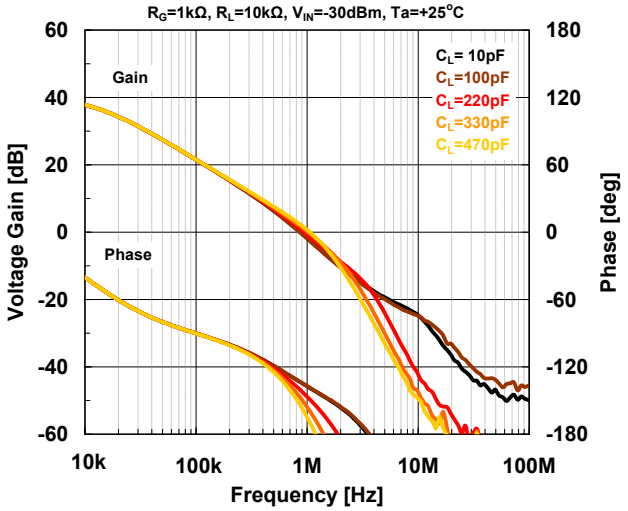

Voltage Gain/Phase vs. Frequency

G_V=40dB, R_F=100kΩ, Ta=-40°C
R_G=1kΩ, R_L=10kΩ, C_L=3pF, V_{IN}=-30dBm

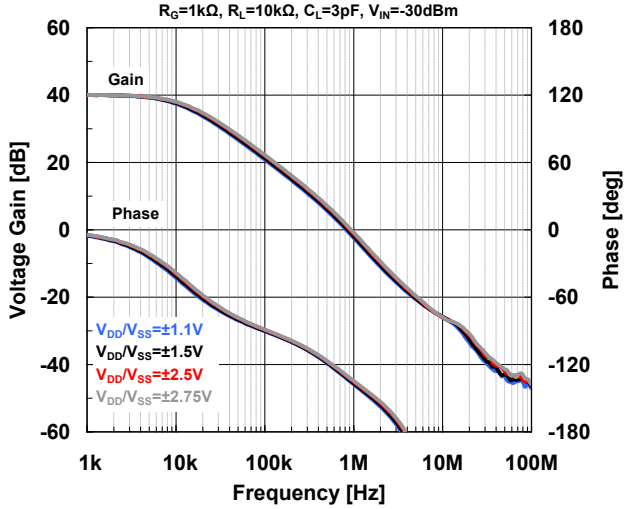

Voltage Gain/Phase vs. Frequency

G_V=40dB, R_F=100kΩ, Ta=+25°C
R_G=1kΩ, R_L=10kΩ, C_L=3pF, V_{IN}=-30dBm

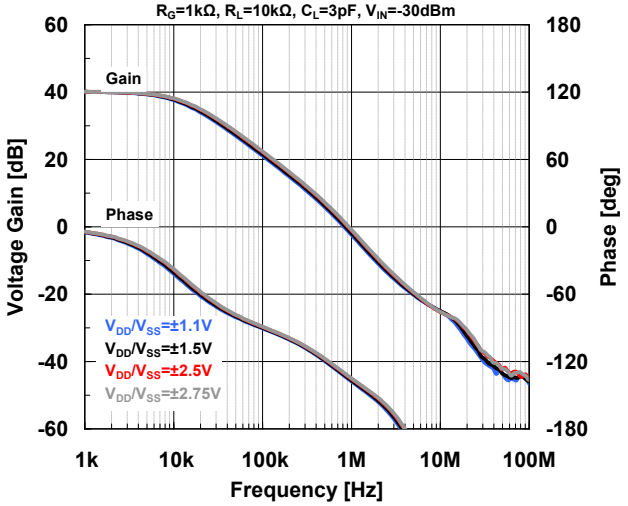

Voltage Gain/Phase vs. Frequency

G_V=40dB, R_F=100kΩ, Ta=+85°C
R_G=1kΩ, R_L=10kΩ, C_L=3pF, V_{IN}=-30dBm

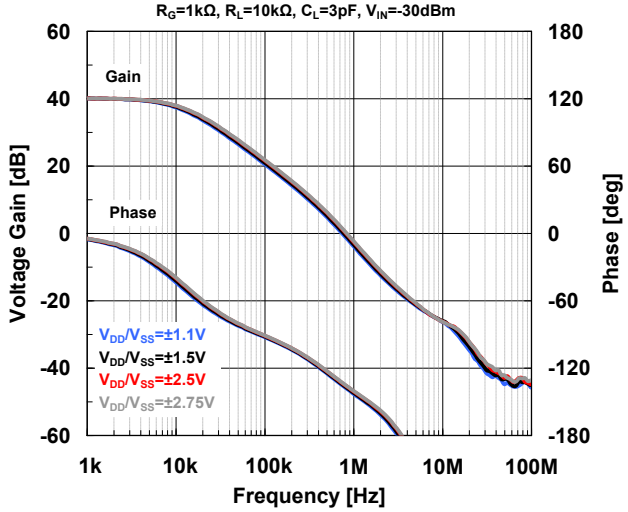

Downloaded from Arrow.com.

●Typical Characteristics

Frequency Response (Load Capacitance)

V_{DD}/V_{SS}=±1.5V, G_V=0dB, R_L=10kΩ,
Vin=-30dBm,Ta=+25°C

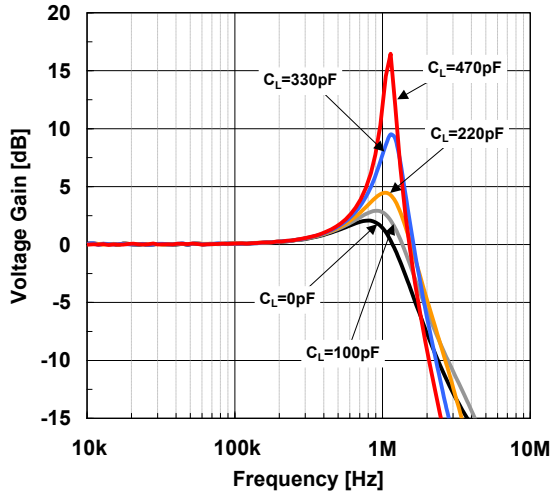

Phase Margin vs. Load Capacitance

G_V=40dB, R_F=100kΩ, R_G=1kΩ, R_L=10kΩ,
R_S=50Ω, Vin=-30dBm, Ta=+25°C

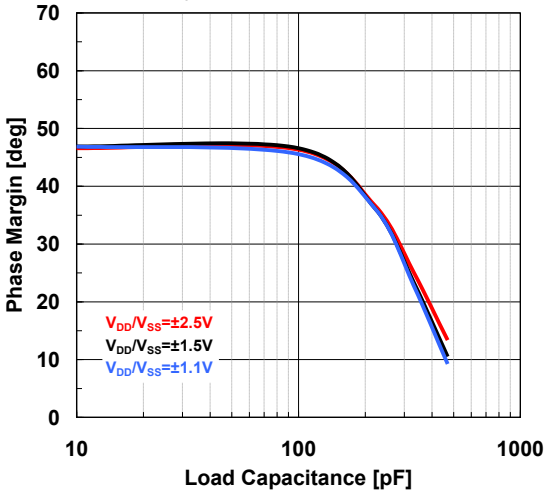

Pulse Response

V_{DD}/V_{SS}=±1.5V, A_V=0dB, f=50kHz,
V_{IN}=1V_{PP}, R_L=10kΩ, C_L=15pF

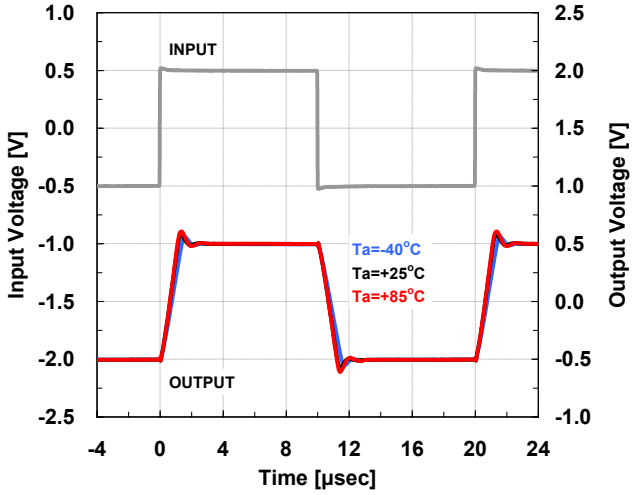

Pulse Response

V_{DD}/V_{SS}=±1.5V, A_V=0dB, f=50kHz,
V_{IN}=1V_{PP}, R_L=10KΩ, C_L=330pF

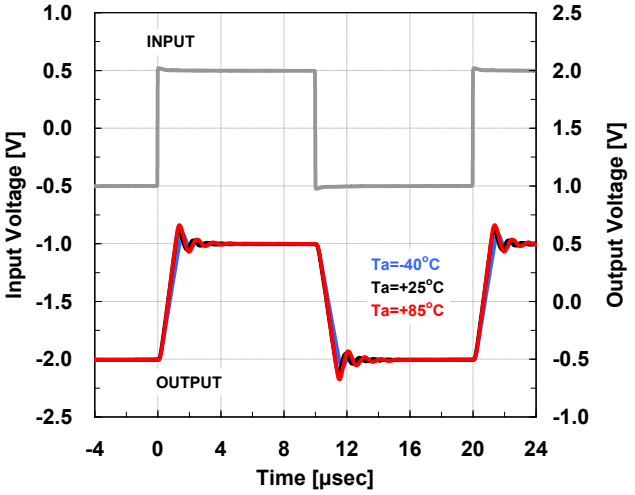

Channel Separation vs. Frequency

G_V=40dB, R_L=10kΩ, R_F=100kΩ, V_{IN}=1ch⇒4ch, Ta=25°C

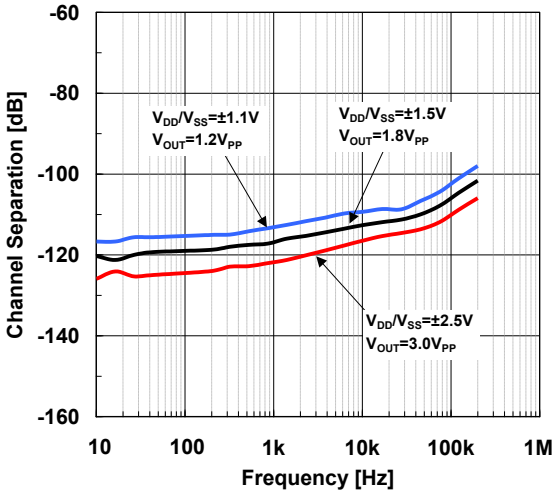

Channel Separation vs. Frequency

V_{DD}/V_{SS}=±1.5V, G_V=40dB, R_L=10kΩ,
R_F=100kΩ, Vo=1.8V_{PP}, Ta=25°C

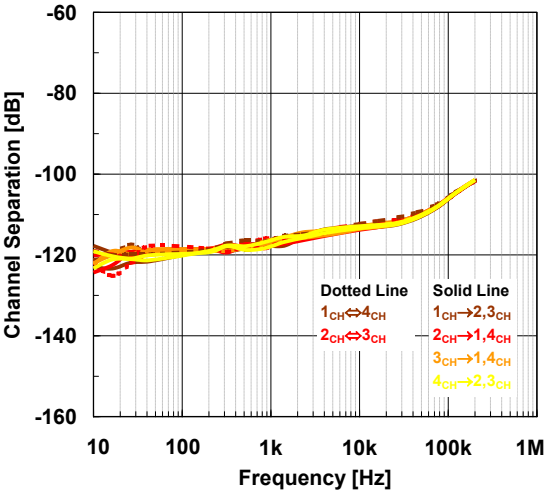

Downloaded from Arrow.com.

●Typical Characteristics

THD+N vs. Output Voltage

V_{DD}/V_{SS}=±1.1V, G_V=0dB, R_L=10KΩ, Ta=25°C

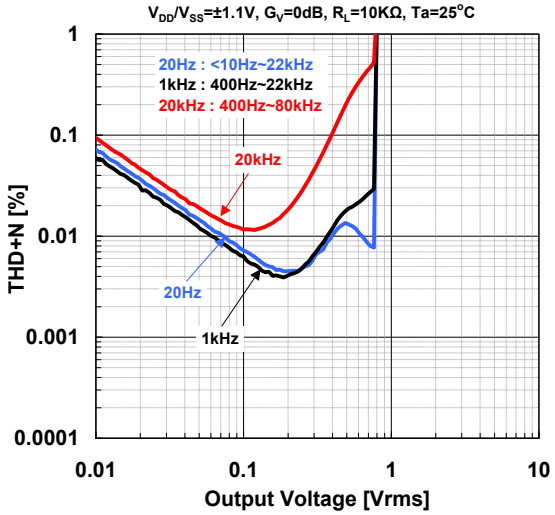

THD+N vs. Output Voltage

V_{DD}/V_{SS}=±1.5V, G_V=0dB, R_L=10KΩ, Ta=25°C

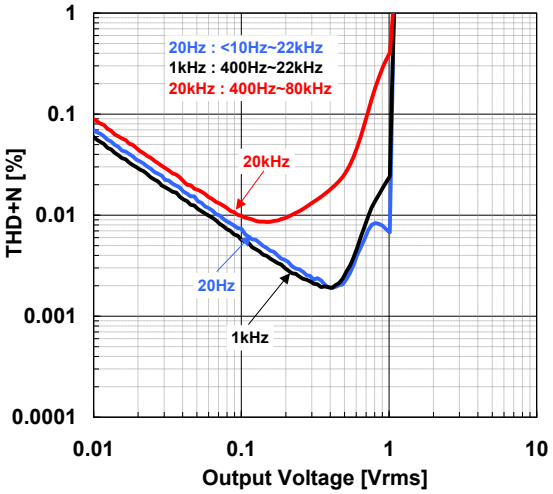

THD+N vs. Output Voltage

V_{DD}/V_{SS}=±2.5V, G_V=0dB, R_L=10KΩ, Ta=25°C

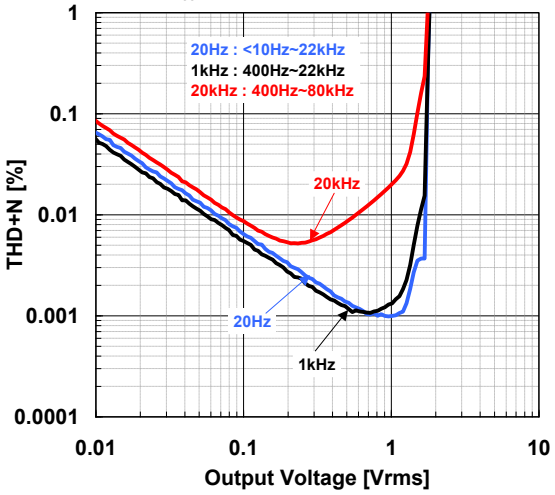

Equivalent Input Noise Voltage vs. Frequency

G_V=40dB, R_L=10kΩ, CL=10pF, Ta=25°C

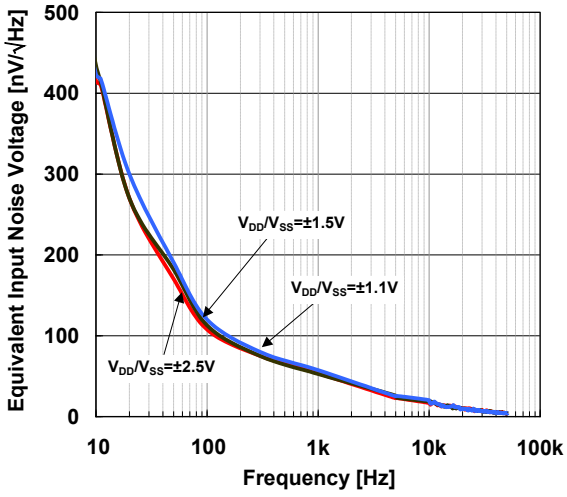

[CAUTION]
The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Downloaded from Arrow.com.