


ATE

Subminiature Toggle Switch

Washable



RoHS Compliant

UL

■ Features

1. Twin-contact clip mechanism for high reliability.
2. Process sealed structure
3. Gold-plated contacts.
4. Terminal pin pitch: 2.54 mm.
5. Independent detent mechanism ensures light operational feel.
6. UL recognized (Excluding ATE-J series with plastic cap/rocker)

■ Specifications

Rating	Max.	50mA 60VAC/DC 0.4VA AC/DC
	Min.	1 μ A 20mVAC/DC
	UL	48VAC/DC 50mA
Initial contact resistance	50m Ω Max. (1.5mA 200 μ VAC)	
Dielectric strength	250VAC 1 minute	
Insulation resistance	500M Ω min. (500VDC)	
Electrical life	10,000 cycles at 0.4VA rating. 50,000 cycles at 0.4VA rating. (D,E type) 30,000 cycles at 0.4VA rating. (F,G,H type)	
Mechanical life	D,E type 50,000 cycles F,G,H type 30,000 cycles	
Operating temperature range	-20°C ~ +85°C	
Storage temperature range	-40°C ~ +85°C	


■ Part Numbering

A		TE		2	D	-	2	M	3	-	10	-	Z
Series code		Actuator shape		Number of poles	Switching function		Terminal style	Actuator shape	Bracket style		Clip mechanism		
Code	Type	Fig.	Number of poles	Code	Switching function	Fig.	Terminal style	Code	Actuator shape	Fig.	Bracket		
TE	Toggle type	1	1 pole	D	ON - ON	2	PC Straight	M	Standard	3	Without bracket		
		2	2 poles	E	ON - OFF - ON	5	Right angle (0.2 inch pitch)	F	Flat toggle				
				F	ON - (ON)	6	Right angle (0.3 inch pitch)						
				G	(ON) - OFF - (ON)								
				H	ON - OFF - (ON)								

Compact type
Space between terminal rows (Double pole): 2.54 mm

(ON) : Momentary.

Right Angle Terminals

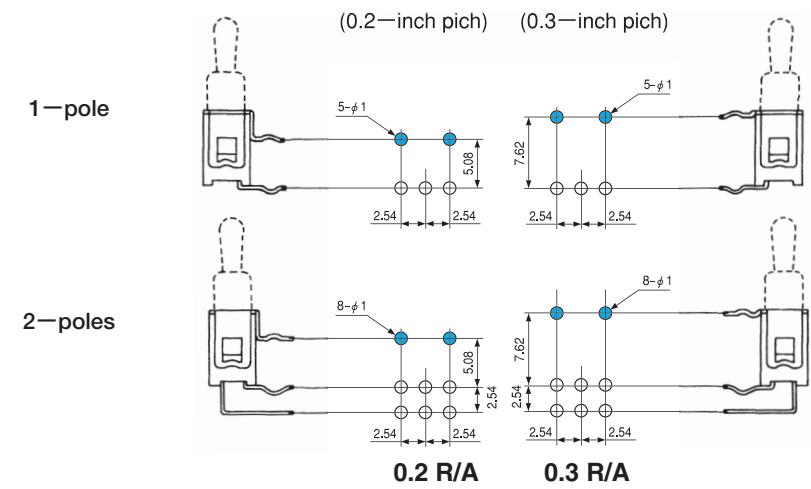

● The space between the terminal rows are available in two dimensions: 0.2 inches (5.08 mm) and 0.3 inches (7.62 mm).
 [Example] 0.2-inch pitch: **ATE1D-5M3-10-Z**
 0.3-inch pitch: **ATE1D-6M3-10-Z**

Optional Accessories


Refer to P.371 for PC Hole Layouts.

Part name	Bracket		
Poles	Single pole	Double poles	
Box size	5 mm	7.5 mm	5 mm
Type	ATE-2M · 2F		
Dimensions			
Part number	140000640314	140000640315	140000640318

Type	ATE-2M · 5M · 6M
Part name	Color Cap
Dimensions	Gloss finish Vinyl chloride
White	140000470174
Red	140000470175
Black	140000470173
Gray	140000470179

SPDT

PC Straight

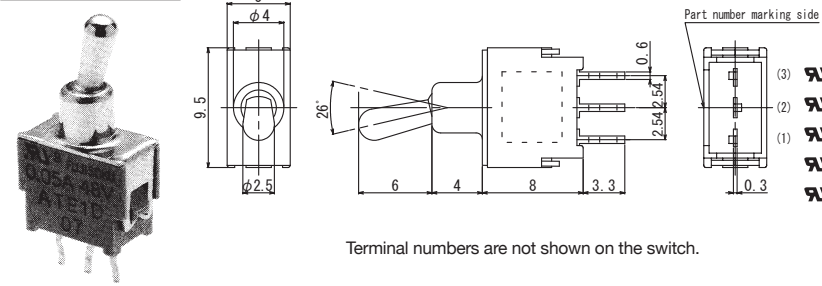


Terminal numbers are not shown on the switch.

Switching function	Viewed from part No. marking side		
Part No.			
ATE1D-2M3-10-Z	ON	—	ON
ATE1E-2M3-10-Z	ON	OFF	ON
ATE1F-2M3-10-Z	ON	—	(ON)
ATE1G-2M3-10-Z	(ON)	OFF	(ON)
☆ATE1H-2M3-10-Z	ON	OFF	(ON)
Connecting terminals	2—3	—	2—1

DPDT

PC Straight

Distance between two terminal rows : 2.54mm

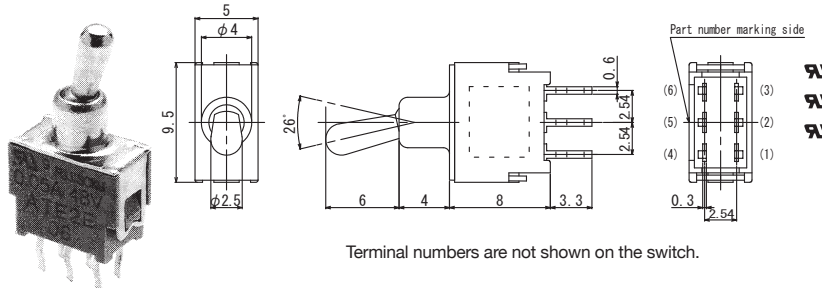

Terminal numbers are not shown on the switch.


Switching function	Viewed from part No. marking side		
Part No.			
ATE2D-2M3-10-Z	ON	—	ON
☆ATE2E-2M3-10-Z	ON	OFF	ON
☆ATE2G-2M3-10-Z	(ON)	OFF	(ON)
Connecting terminals	2—3 5—6	—	2—1 5—4

ATE

SPDT

(Mounting height : 3.1mm)

Right angle (0.2 inch pitch)

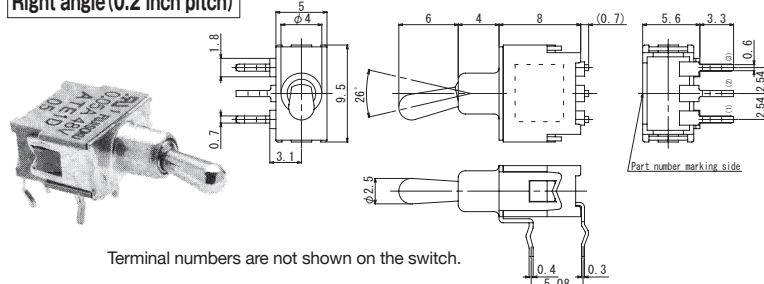


Terminal numbers are not shown on the switch.

Part No.	Switching function	Viewed from part No. marking side		
ATE1D-5M3-10-Z	ON	ON	—	ON
☆ATE1E-5M3-10-Z	ON	ON	OFF	ON
☆ATE1G-5M3-10-Z	(ON)	(ON)	OFF	(ON)
★ATE1H-5M3-10-Z	ON	ON	OFF	(ON)
Connecting terminals		2—3	—	2—1

DPDT

(Mounting height : 3.1mm)

Right angle (0.2 inch pitch)

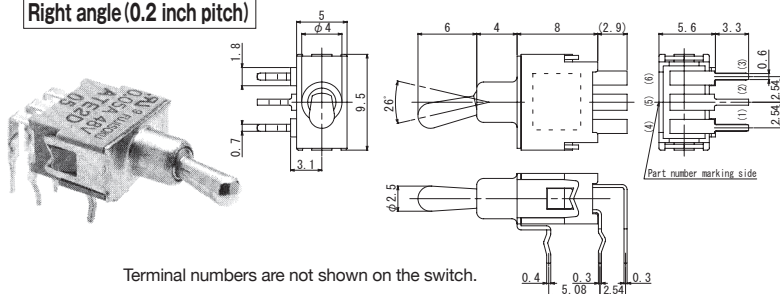


Terminal numbers are not shown on the switch.

Part No.	Switching function	Viewed from part No. marking side		
☆ATE2D-5M3-10-Z	ON	ON	—	ON
☆ATE2G-5M3-10-Z	(ON)	(ON)	OFF	(ON)
Connecting terminals		2—3 5—6	—	2—1 5—4

SPDT

(Mounting height : 3.1mm)

Right angle (0.3 inch pitch)

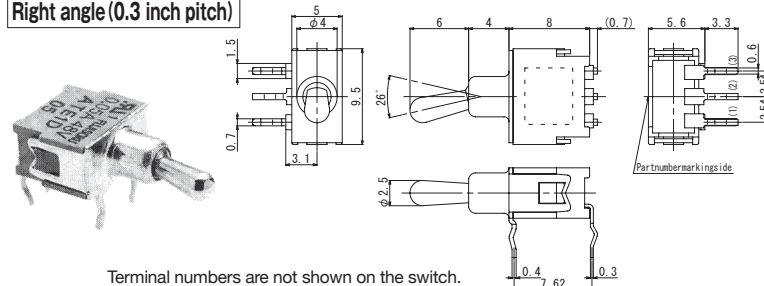

Terminal numbers are not shown on the switch.

Part No.	Switching function	Viewed from part No. marking side		
ATE1D-6M3-10-Z	ON	ON	—	ON
ATE1E-6M3-10-Z	ON	ON	OFF	ON
ATE1F-6M3-10-Z	ON	ON	—	(ON)
☆ATE1G-6M3-10-Z	(ON)	(ON)	OFF	(ON)
☆ATE1H-6M3-10-Z	ON	ON	OFF	(ON)
Connecting terminals		2—3	—	2—1



(ON) : Momentary.

☆ : Semi-standard products.




★ : Made to order products.

(Mounting height : 3.1mm)

Right angle (0.3 inch pitch)

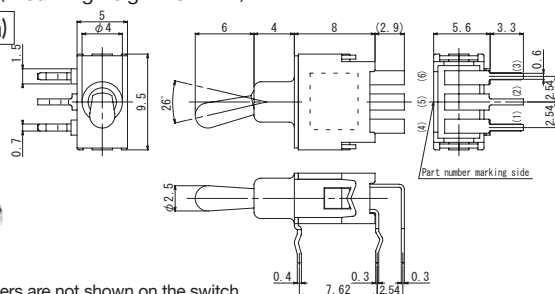



Terminal numbers are not shown on the switch.

Part No.	Switching function	Viewed from part No. marking side		
				
ATE2D-6M3-10-Z		ON	—	ON
Connecting terminals		2—3 5—6	—	2—1 5—4






SPDT

PC Straight

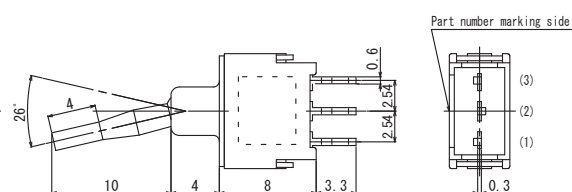Flat Toggle



Terminal numbers are not shown on the switch.


	Switching function Part No.	Viewed from part No. marking side		
				
	ATE1D-2F3-10-Z	ON	—	ON
	ATE1E-2F3-10-Z	ON	OFF	ON
	Connecting terminals	2—3	—	2—1

ATE

DPDT

(Space between terminal rows (Double pole): 2.54 mm)

PC Straight

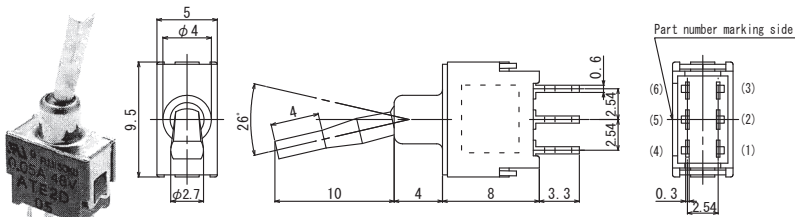


Switching function	Viewed from part No. marking side		
Part No.	ON	—	ON
Connecting terminals	2—3 5—6	—	2—1 5—4

SPDT

(Mounting height : 3.1mm)

Right angle (0.2 inch pitch)

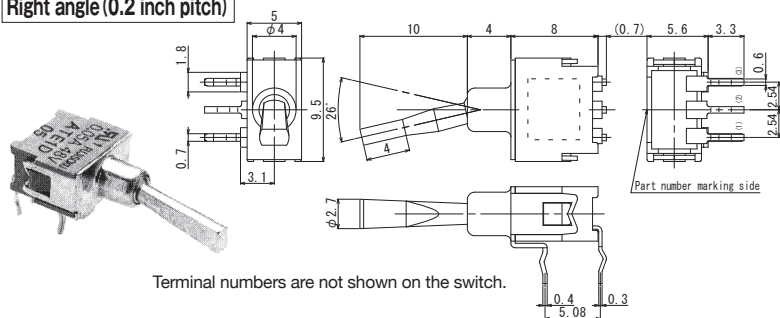


Switching function	Viewed from part No. marking side		
Part No.	(ON)	OFF	(ON)
Connecting terminals	2—3	—	2—1

DPDT

(Mounting height : 3.1mm)

Right angle (0.2 inch pitch)

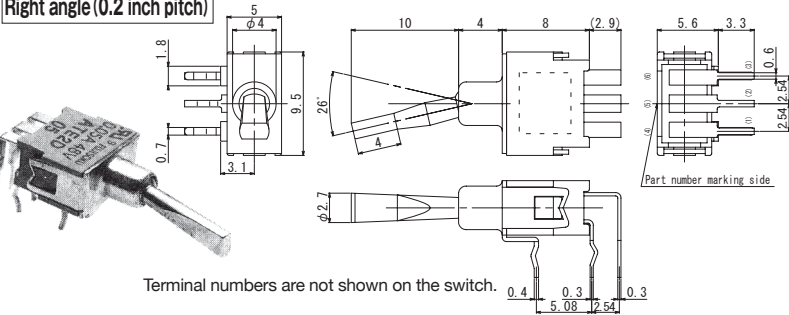


Switching function	Viewed from part No. marking side		
Part No.	ON	—	ON
Connecting terminals	2—3 5—6	—	2—1 5—4

(ON) : Momentary. ☆ : Semi-standard products. ★ : Made to order products.

SPDT

(Mounting height : 3.1mm)

Right angle (0.3 inch pitch)

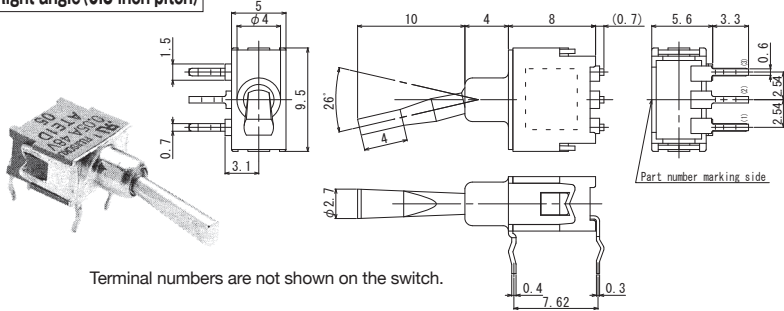


Switching function	Viewed from part No. marking side		
Part No.	☆ATE1G-6F3-10-Z	(ON)	(ON)
Connecting terminals	2-3	—	2-1

DPDT

(Mounting height : 3.1mm)

Right angle (0.3 inch pitch)

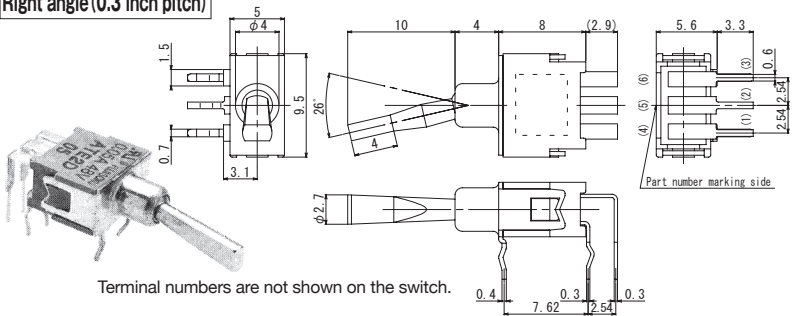

Switching function	Viewed from part No. marking side		
Part No.	☆ATE2D-6F3-10-Z	ON	ON
Connecting terminals	2-3 5-6	—	2-1 5-4

ATE-J(Plastic type)

■Part Numbering(Plastic cap•Rocker type)

A

TE

1

D

—

2

J

3

—

10

—

Z

Series code

Actuator shape

Number of poles

Switching function

Terminal style

Actuator shape

Bracket style

Clip mechanism

Code	Type
TE	Toggle type

Fig.	Number of poles
1	1 pole
2	2 poles

Code	Switching function
D	ON — ON
E	ON—OFF—ON


Fig.	Terminal style
2	P/C terminal
7	Vertical mounting

Code	Actuator shape
J	Plastic Knob type

Fig.	Bracket
3	Without bracket

SPDT

PC Straight


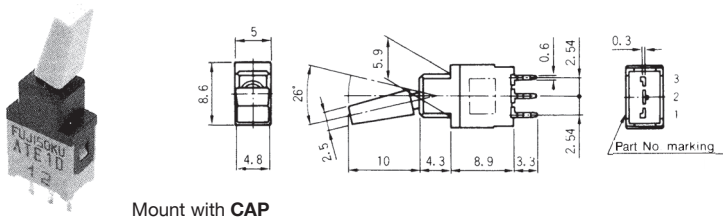





Mount with CAP

Part No.	Switching function	Viewed from part No. marking side		
☆ATE1D-2J3-10-Z	ON	—	ON	
★ATE1E-2J3-10-Z	ON	OFF	ON	
Connecting terminals		2—3	—	2—1

SPDT

Vertical mounting

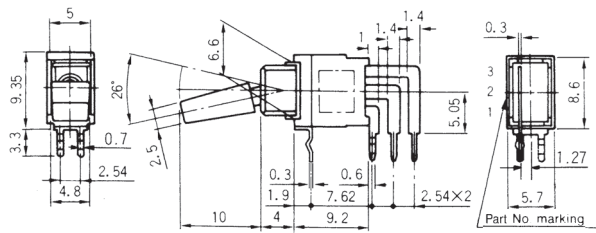

<div>Switching function</div> <div>Part No.</div>	Viewed from part No. marking side		
			
★ATE1D-7J3-10-Z	ON	—	ON
Connecting terminals	2—3	—	2—1

Mount with CAP

Terminal numbers are not shown on the switch.


Optional Accessories

《Sold separately》

Type	ATE-2J · 7J	ATE-2J · 7J
Part name	Color Cap	Rocker
Dimensions	 Matte finish ABS resin	 Matte finish ABS resin
White	140000050884	140000481541
Red	140000050886	140000481543
Black	140000050885	140000481542









Color Cap and Rocker

Installation Procedure for ATE-J type

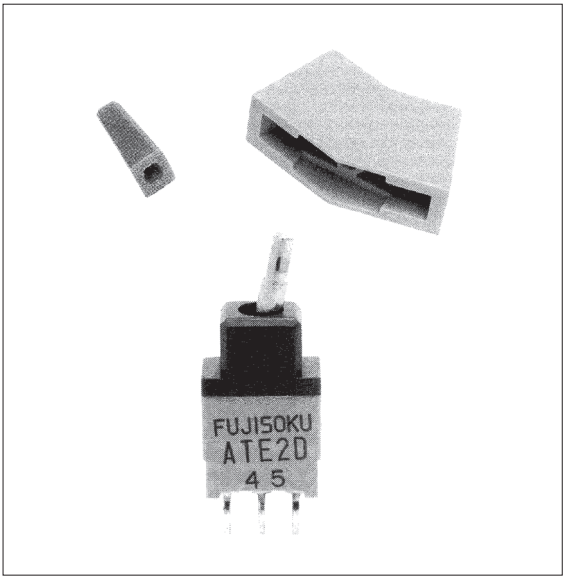






PC Hole Layouts
PC terminal

(Top voew)



Series code	ATE—2M•2F•2J	ATE—2M•2F		
Installation	Whithout bracket	When optional bracket is used		
		140000640314	140000640315	140000640318
1—pole				
2—poles 2.54mm Tow terminal rows				

Right Angle terminal • Vertical Mount terminal

(Top voew)

Series code	ATE—5M • 5F	ATE—6M • 6F	ATE—7J
Terminal	R/A 0.2—inch pich	R/A 0.3—inch pich	Vertical mount
1—pole			
2—poles			

Bracket Mounted Dimensions.

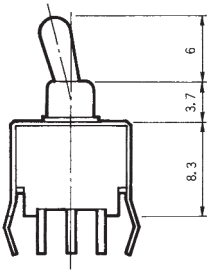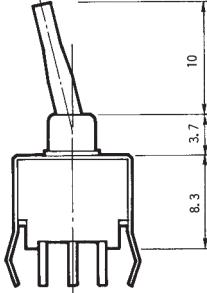Type	ATE—2M	ATE—2F
	Standard	Flat
Dimensions		


■ Soldering Specifications

(1) Manual Soldering

Device : Soldering iron
380°C, Max.; 3 seconds, Max.

(2) Auto Soldering

Device : Jet wave type or dip type
275°C, Max.; 6 seconds, Max.



- Pre-heating should be done at temperatures ranging from 80°C to 120°C and within 120 seconds

(3) Install the cap/rocker accessory after soldering and cleaning.


■ Flux Cleaning

(1) Solvent : Fluorine or Alcohol type.

- (2) Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.

■ Packaging Specifications


Plastick Pack



PC terminals
: 100 pcs./pack

Right angle terminals
: 50 pcs./pack

Plastick Pack



Vertical mounting terminals
100 pcs./pack

■ Mounting of Switch

- Use PC boards with hole diameter of 1mm.
- Do not bend the terminal pins before mounting the switch on the PC board.
- After mounting the switch, do not place the device in such a way that the device weight will be applied on to the actuator of the switch.
- Do not apply load exceeding 12.7 N to the actuator.

