

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,80 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50		1,74	80	1,25	0,05	2,45	0,10	2,70	0,10	3,60	0,10
1005 0,80		2,03	90	1,35	0,05	2,45	0,10	2,70	0,10	3,60	0,10
1005 1,00		2,23	120	1,55	0,05	2,50	0,10	2,60	0,10	3,60	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

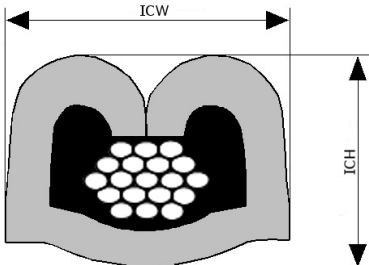

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1005
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,85 - 2,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,35	0,05	2,45	0,10	2,70	0,10	3,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

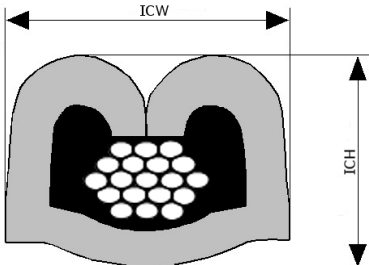

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,35	0,05	2,45	0,10	2,80	0,10	3,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

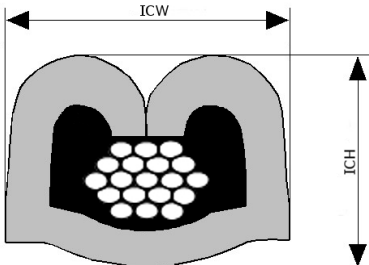

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,35	0,05	2,45	0,10	2,80	0,10	3,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

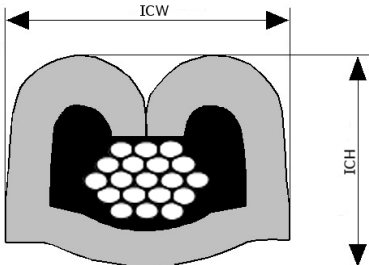

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,51 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,30 - 3,05
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50		2,45	80	1,25	0,05	2,45	0,10	2,80	0,10	3,60	0,10
1009 0,51		2,45	80	1,25	0,05	2,45	0,10	2,80	0,10	3,60	0,10
1009 0,80		2,78	90	1,35	0,05	2,45	0,10	2,80	0,10	3,70	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

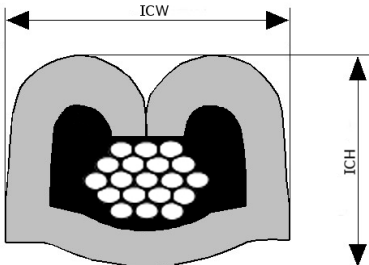

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50 | 0,51 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1009
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,30 - 3,05
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50		2,45	80	1,25	0,05	2,45	0,10	2,80	0,10	3,60	0,10
1009 0,51		2,45	80	1,25	0,05	2,45	0,10	2,80	0,10	3,60	0,10
1009 0,80		2,78	90	1,35	0,05	2,45	0,10	2,80	0,10	3,70	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

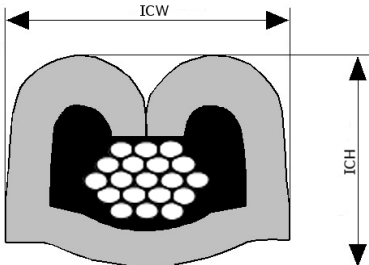

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,35	0,05	2,45	0,10	2,70	0,10	3,60	0,10
1025 1,00		2,23	120	1,55	0,05	2,50	0,10	2,60	0,10	3,60	0,10

Cable type code legend:

1025:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

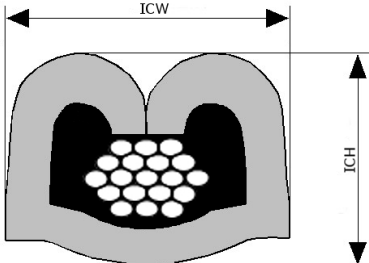

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50		2,43	80	1,25	0,05	2,45	0,10	2,80	0,10	3,60	0,10

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

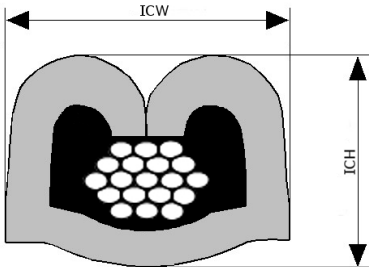

Terminal Part Number: 12047957
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1094
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50		2,43	80	1,25	0,05	2,45	0,10	2,80	0,10	3,60	0,10

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

