

DC FILTERING

FFG Design (FFH-RoHS Compliant)



DC FILTERING



DIMENSIONS (CASE SIZES)

plastic case – Terminals: threaded insert M8 filled with thermosetting resin

MAX TORQUE M8 : 8.5 Nm
H ≤ 62.5

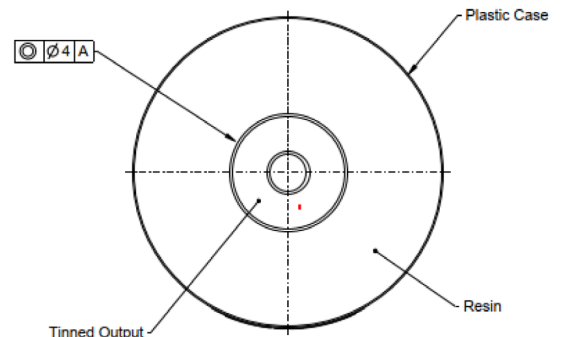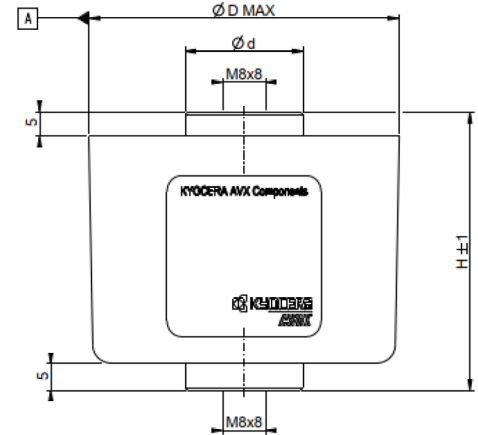

General Tolerance : ±2

GENERAL DESCRIPTION

The FFG series uses a non-impregnated metallized dielectric, which features a controlled self-healing process.

PACKAGING MATERIAL

Self-extinguishing plastic case (V-0 = in accordance with UL 94; certified classifications according to EN 45545-2) filled with thermosetting resin.

Self-extinguishing thermosetting resin (V-0 = in accordance with UL 94; certified classifications according to EN 45545-2).

STANDARDS

- IEC 61071:** Capacitors for power electronics
- IEC 61881:** Railway applications - Rolling stock equipment - Capacitors for power electronics
- IEC 61373:** Railway applications - Rolling stock equipment - Shock and vibration tests
- IEC 60068-1:** Environmental testing - Part 1: general and guidance
- UL 94:** Tests for Flammability of Plastic Materials for Parts in Devices and Appliances

HOT SPOT CALCULATION

Total losses are calculated as follow: $P_t = P_j + P_d$

Joule losses: $P_j = R_s \times (I_{rms})^2$

Dielectric losses: $P_d = Q \times \text{tg}\delta_0$ with

• $Q(\text{reactive power}) = \frac{(I_{rms})^2}{C2\pi f}$ for a waveform of f frequency

• $\text{tg}\delta_0 = 2 \times 10^{-4}$ (dielectric losses of polypropylene)

Hot spot temperature will be:

$$\theta_{HS} = \theta_{terminal} + (P_j + P_d) \times R_{th}$$

HOW TO ORDER

FFG	8	6	K	0376	K	--
Series	Case Size	Dielectric	Voltage Code	Capacitance EIA Code	Capacitance Tolerances	Voltage Range
FFG = Standard FFH = RoHS Compliant	8	6 = Polypropylene	K = 600Vdc B = 800Vdc C = 900Vdc L = 1000Vdc U = 1200Vdc N = 1900Vdc		K = ±10%	-- = < 1kV J7 = ≥ 1kV

Not RoHS Compliant



Please select correct termination style.

DC FILTERING

FFG (FFH RoHS Compliant)

ELECTRICAL CHARACTERISTICS


Items	Characteristics
Operating temperature:	-40°C + 105°C
Storage temperature:	-55°C + 85°C
Capacitance range:	16μF to 160μF
Rated DC voltage V _{ndc} :	600 to 900 V
Capacitance tolerance:	±10%
Test voltage between terminals:	@ 25°C: 1.5 x U _n dc during 10s
Test voltage between terminals and case:	@ 25°C: @ 4 kVrms @ 50 Hz during 1 mn (test type)
Dielectric:	Polypropylene

RATINGS AND PART NUMBER REFERENCE (600V TO 900V)

Part Number	C _n (μF)	Height ±1 (mm)	h ±2 (mm)	D max (mm)	d ±0.50 (mm)	I ² t max (A ² s)	I _{rms} max (A)	R _s (mΩ)	R _{th} (°C/W)	Typical Weight (g)
U _{ndc} 600 V (Voltage Code K)										
FFG86K0376K-	37	52	5	60	22	4	28	1.3	10.1	190
FFG86K0586K-	58	52	5	72	22	10	44	1	6.4	260
FFG86K0806K-	80	52	5	82	22	20	61	0.7	4.9	320
FFG86K0167K-	160	62.5	5	92	22	32	76	0.8	5.8	475
U _n dc 800 V (Voltage Code B)										
FFG86B0236K-	23	52	5	60	22	3	26	1.7	10.1	190
FFG86B0376K-	37	52	5	72	22	8	43	1.2	6.5	260
FFG86B0516K-	51	52	5	82	22	15	59	0.9	4.8	320
FFG86B0107K-	100	62.5	5	92	22	24	73	1	5.9	475
U _n dc 900 V (Voltage Code C)										
FFG86C0166K-	16	52	5	60	22	2.8	27	2	9.8	190
FFG86C0266K-	26	52	5	72	22	7	44	1.3	6.5	260
FFG86C0356K-	35	52	5	82	22	13	60	1	4.8	320
FFG86C0706K-	70	62.5	5	92	22	20	75	1.2	5.8	475

Dimensions millimeters

LIFETIME EXPECTANCY vs HOT SPOT TEMPERATURE AND VOLTAGE

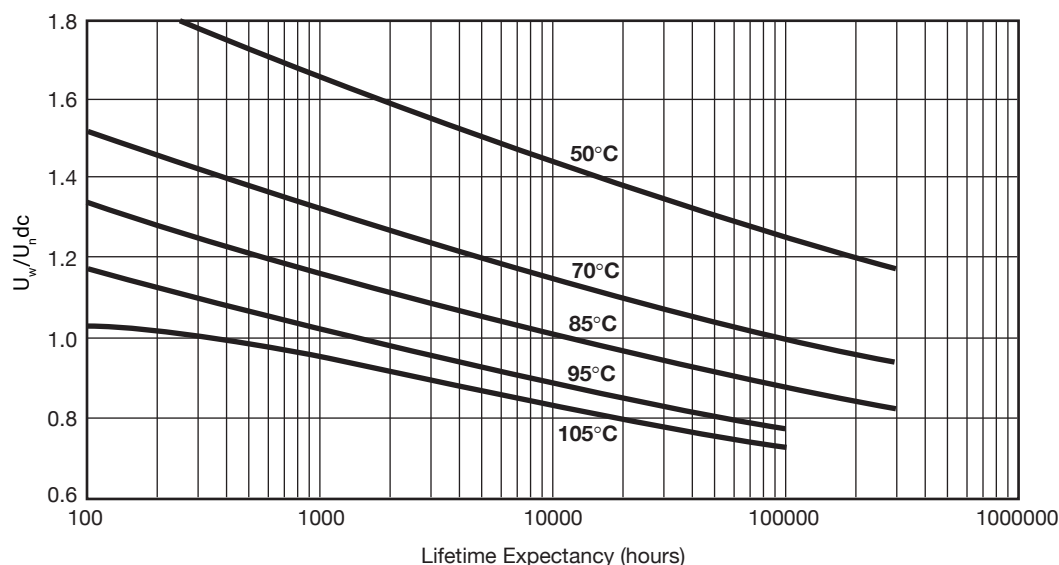

U_w = Permanent working or operating DC voltage.

DC FILTERING

FFG (FFH RoHS Compliant)

ELECTRICAL CHARACTERISTICS


Items	Characteristics
Operating temperature:	-40°C + 105°C
Storage temperature:	-55°C + 85°C
Capacitance range:	5μF to 110μF
Rated DC voltage V _{ndc} :	1000 to 1900 V
Capacitance tolerance:	±10%
Test voltage between terminals:	@ 25°C: 1.5 x U _{n,dc} during 10s
Test voltage between terminals and case:	@ 25°C: @ 4 kVrms @ 50 Hz during 1 mn (test type)
Dielectric:	Polypropylene

RATINGS AND PART NUMBER REFERENCE (1000V TO 1900V)

Part Number	C _n (μF)	Height ±1 (mm)	h ±2 (mm)	D max (mm)	d ±0.50 (mm)	I ² t max (A ² s)	I _{rms} max (A)	R _s (mΩ)	R _{th} (°C/W)	Typical Weight (g)
U_{n,dc} 1000 V (Voltage Code K)										
FFG86L0256KJ7	25	52	5	60	22	1.9	21	3.6	9.9	190
FFG86L0406KJ7	40	52	5	72	22	5	34	2.3	6.4	260
FFG86L0556KJ7	55	52	5	82	22	9.5	46	1.7	4.7	320
FFG86L0117KJ7	110	62.5	5	92	22	14.9	58	1.9	5.7	475
U_{n,dc} 1200 V (Voltage Code U)										
FFG86U0176KJ7	17	52	5	60	22	1.3	19	4.3	9.9	190
FFG86U0276KJ7	27	52	5	72	22	3.3	30	2.8	6.5	260
FFG86U0376KJ7	37	52	5	82	22	6.2	41	2.1	4.8	320
FFG86U0766KJ7	76	62.5	5	92	22	10.3	53	2.2	5.6	475
U_{n,dc} 1900 V (Voltage Code N)										
FFG86N0505KJ7	5	52	5	60	22	1.7	19	2.8	11.3	190
FFG86N0905KJ7	9	52	5	72	22	5.5	35	1.6	6.6	260
FFG86N0126KJ7	12	52	5	82	22	9.9	46	1.3	5	320
FFG86N0256KJ7	25	62.5	5	92	22	18	63	1.2	5.2	475

Dimensions millimeters

LIFETIME EXPECTANCY vs HOT SPOT TEMPERATURE AND VOLTAGE

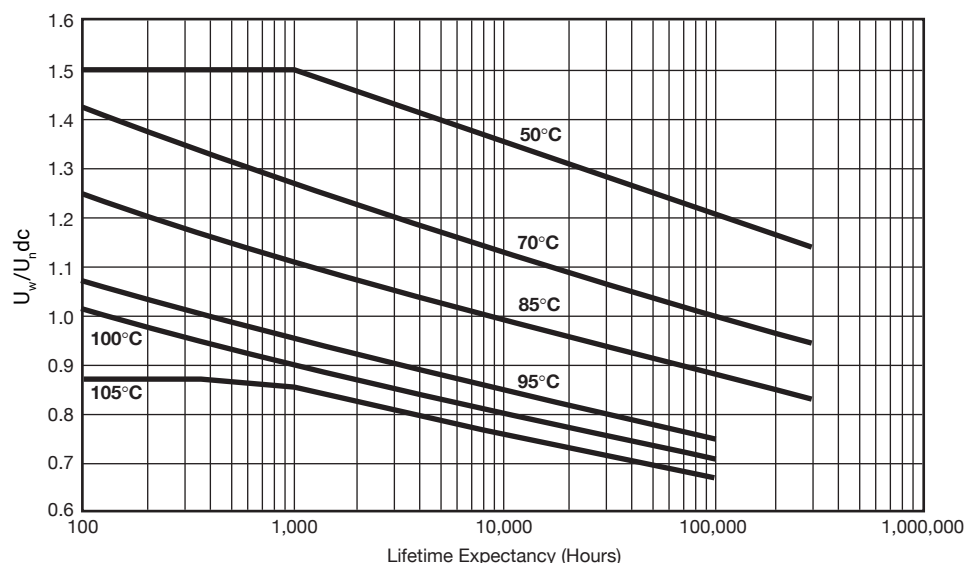

U_w = Permanent working or operating DC voltage.