




Part Number : [1712241011](#)

Product Description : zSFP+ Stacked Ganged Assembly with Metal Spring Fingers, 2-by-1 With 4 Light Pipes, 40 Circuits

Series Number : 171224

Status : Active

Product Category : High-Speed I/O Connectors

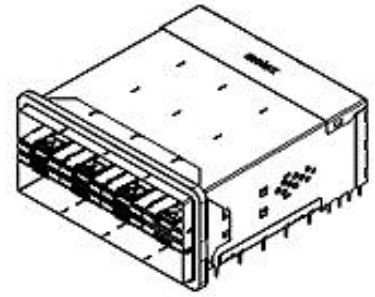

Documents and Resources

Drawings

[1712241011_sd.pdf](#)

[2001991870-000.pdf](#)

[2002142253-000.pdf](#)

[PK-170071-001-001.pdf](#)

3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

[2001991870-000.zip](#)

[2002142253-000.zip](#)

[EE-170071-0001-001.pdf](#)

[SP-170426-1000-001.zip](#)

Specifications

[AS-170071-0002-001.pdf](#)

[PS-170071-0001-001.pdf](#)

[TS-170071-0001-001.pdf](#)


Tooling Specifications

[2002142253-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 34;
------------	----------------------------------

	33
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	High-Speed I/O Connectors
Series	171224
Description	zSFP+ Stacked Ganged Assembly with Metal Spring Fingers, 2-by-1 With 4 Light Pipes, 40 Circuits
Application	Module-to-Board
Component Type	Receptacle
Product Name	zSFP Plus,zSFP+
Type	Pluggable
UPC	884982822924

Agency

UL	E29179
----	--------

Electrical

Current - Maximum per Contact	0.5A
Data Rate	28.0 Gbps
Shielded	Yes
Shield Type	EMI Fingers
Voltage - Maximum	30V AC (RMS)/DC

Physical

Circuits (Loaded)	40
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	27.867/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Tray
Panel Mount	No
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes

Ports	2
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Through Hole - Compliant Pin

Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----

This document was generated on Apr 14, 2026