
PRODUCT DATA DRAWING

	REVISION HISTORY		
REV	DESCRIPTION	DATE	APPROVED
-	NRN 46817	06/22	
			SEE PDM

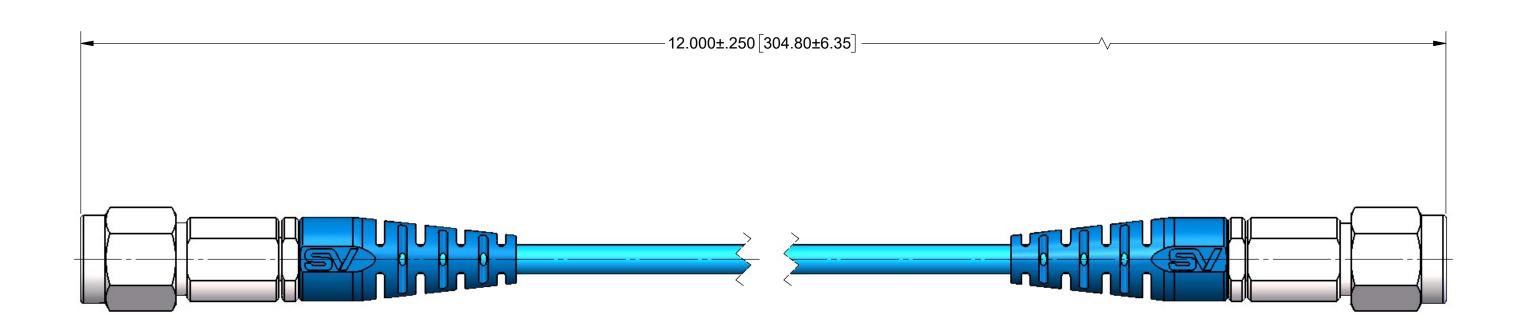

MATERIAL:

STR. M SMA FOR SV87LL CABLE (2911-61020) **CONNECTORS**:

CABLE: SV87LL FLEXIBLE CABLE (200-70-363) STRAIN RELIEF: SILICONE RUBBER 80A (220-70-149)

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 18.0 GHz. 1.5:1 MAX DC TO 18.0GHz VSWR:

MATERIAL:	SEE NOTES				
FINISH:	SEE NOTES				
SURFACE ARE	SURFACE AREA: N/A				
F	PROPRIETARY				
IS THE SOLE PR ANY REPRODUC WITHOUT THE V	ON CONTAINED IN THIS DRAWING OPERTY OF SV MICROWAVE, INC. CTION IN PART OR AS A WHOLE VRITTEN PERMISSION OF E, INC IS PROHIBITED.				

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' +15'
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: S. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS PER ASME Y14.5M - 1994 THIR

RD ANGLE PROJECTION	DRAWN:	JPM 06/02/22
	CHECKED:	SEE PDM
	APPROVED:	SEE PDM

UNLESS OTHERWISE SPECIFIED



SMA STR. M TO SMA STR. M **SV87LL CABLE ASSEMBLY**

SIZE DWG. NO. 7029-3821