
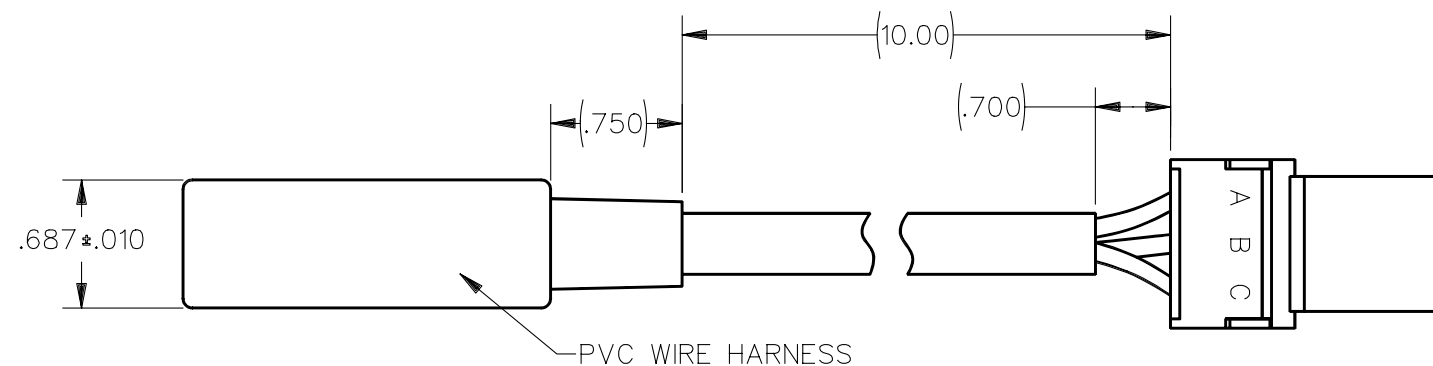
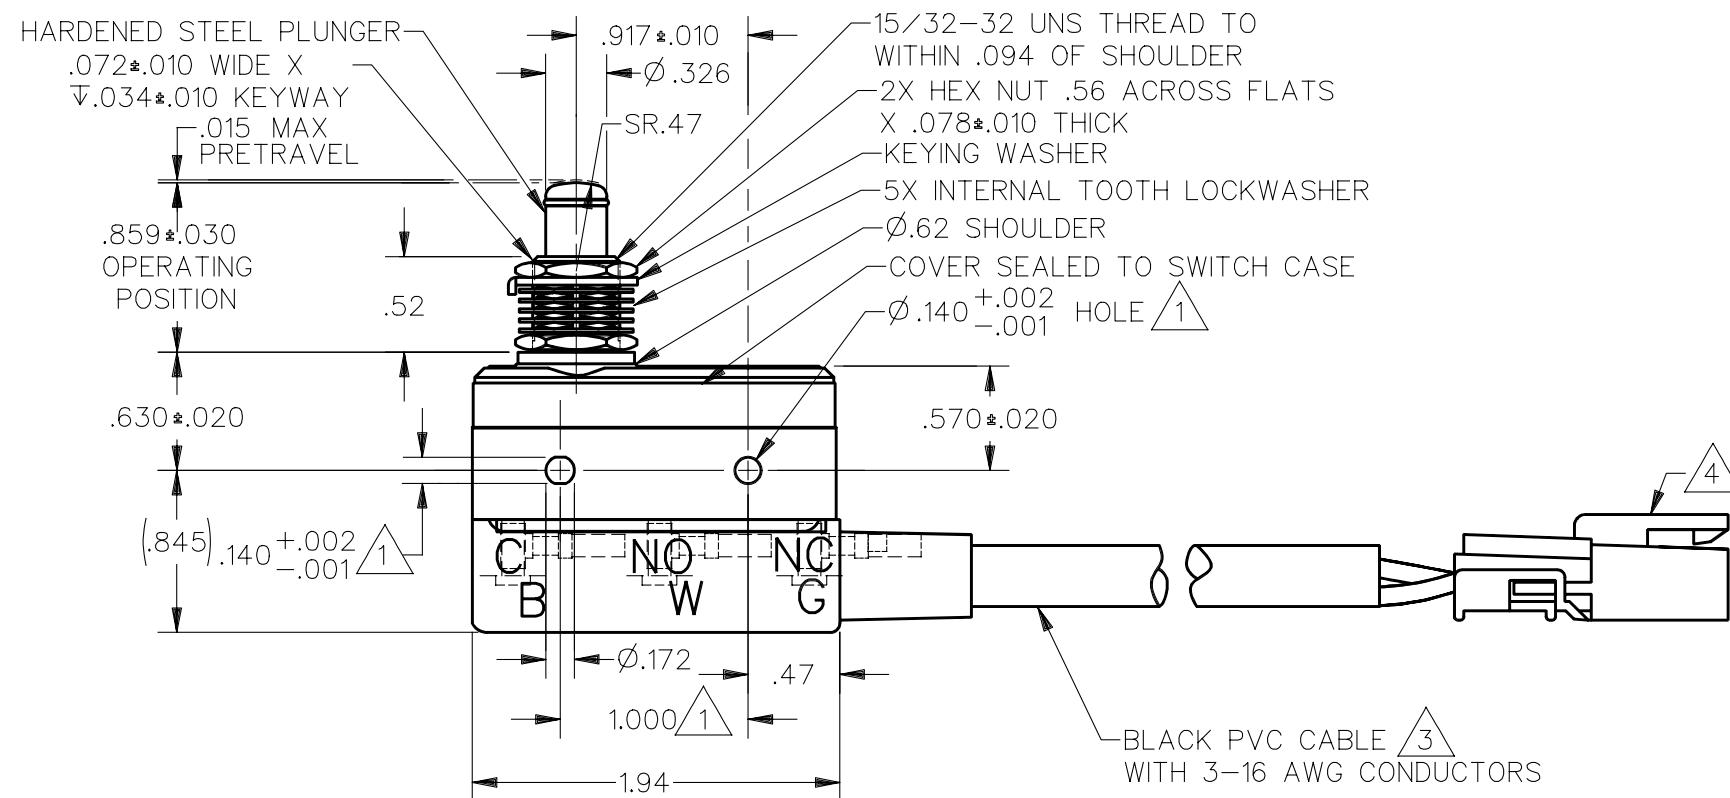


- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing.139$ MAX ON 1.000*.002 CENTERS
 - 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
 - 3 BLACK LEAD IS ATTACHED TO THE COMMON TERMINAL
WHITE LEAD IS ATTACHED TO THE N.O. TERMINAL
GREEN LEAD IS ATTACHED TO THE N.C. TERMINAL
 - 4 CONNECTOR: PAC1202 0398
 - 5 - CONTACT MATERIAL - FASALOY #5

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 9 - 13 OZ.
RELEASE FORCE — — — — — 4 OZ. MIN
DIFFERENTIAL TRAVEL— — — — .0004 - .0020
OVERTRAVEL — — — — — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

SCALE	FULL
-------	------

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT

ANSI Y14.5M-1982 APPLIES