



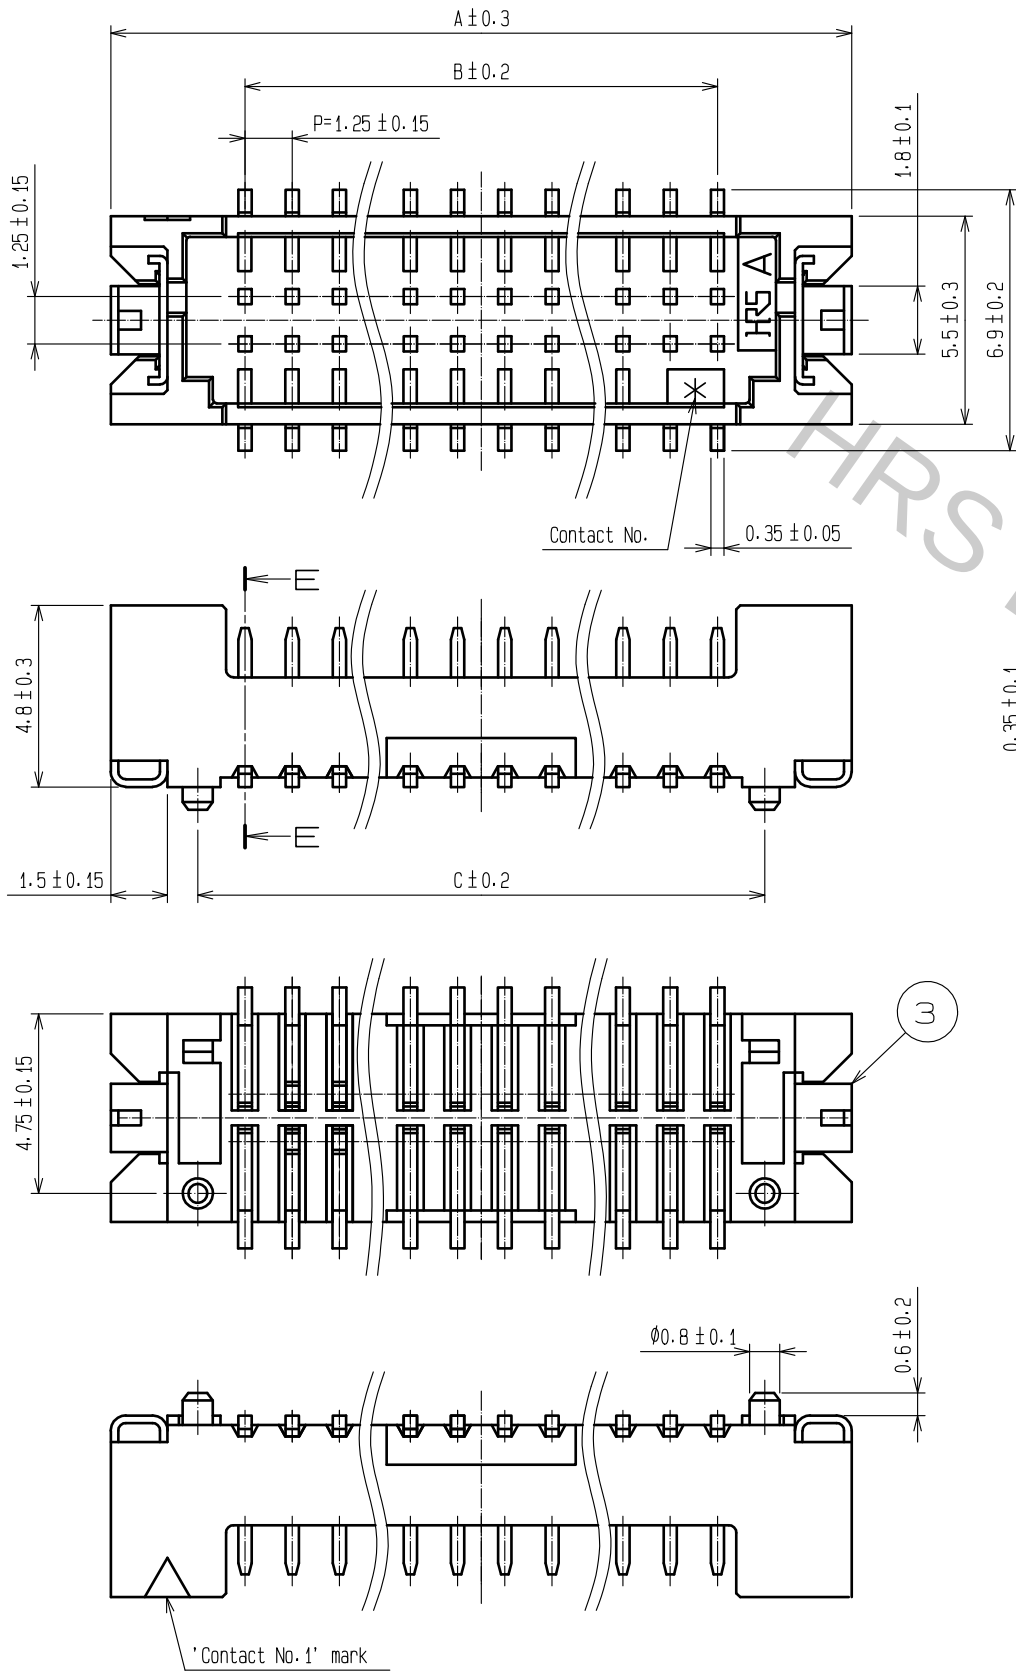

Part No.	Number of contacts	Code No.	A	B	C	D
DF13E-10DP-1.25V(55)	10	CL536-0566-0-55	12.1	5.0	7.5	8.7
DF13E-20DP-1.25V(55)	20	CL536-0567-0-55	18.35	11.25	13.75	14.95
DF13E-30DP-1.25V(55)	30	CL536-0568-0-55	24.60	17.50	20.00	21.20
DF13E-40DP-1.25V(55)	40	CL536-0569-0-55	30.85	23.75	26.25	27.45

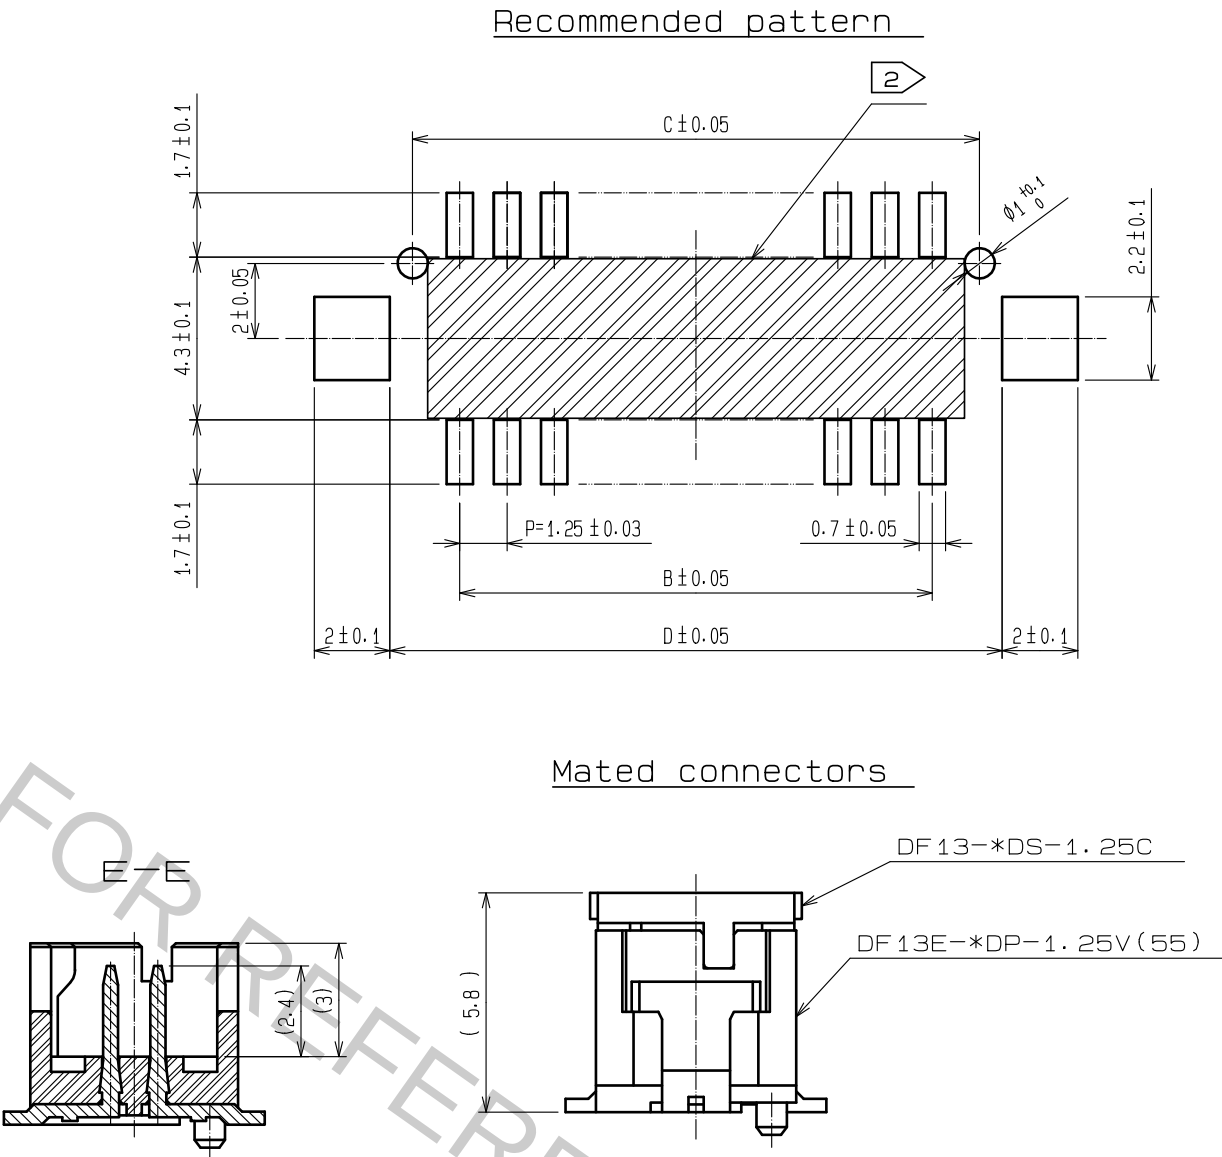

Notes 1 : Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.
2 : If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.

2	Brass	Contact area:Gold plated 0.2μm MIN Lead area:Tin-copper plated 1μm MIN Under plating:Nickel 1μm MIN	5	S.PVC	Gray
			4	R.PVC	Electrostatic protection
1	Polyamide	Beige,UL94V-0	3	Phosphor bronze	Tin plated 1μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT		DESCRIPTION OF REVISIONS
DESIGNED		CHECKED		DATE	
APPROVED : KI. AKIYAMA		16.03.31		DRAWING NO. EDC-367983-55-00	
CHECKED : TS. FUKUSHIMA		16.03.29		PART NO. DF13E-*DP-1.25V(55)	
DESIGNED : MI. SAKIMURA		16.03.29		CODE NO. CL536-	
DRAWN : MI. SAKIMURA		16.03.29		1/2	

Jan.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

