
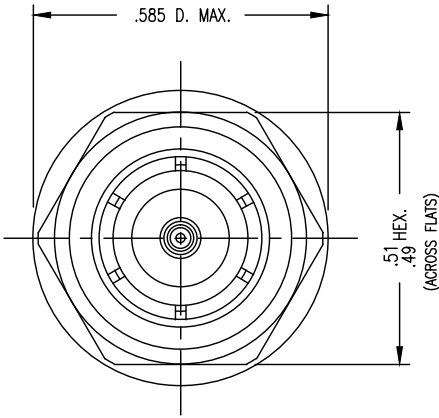


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

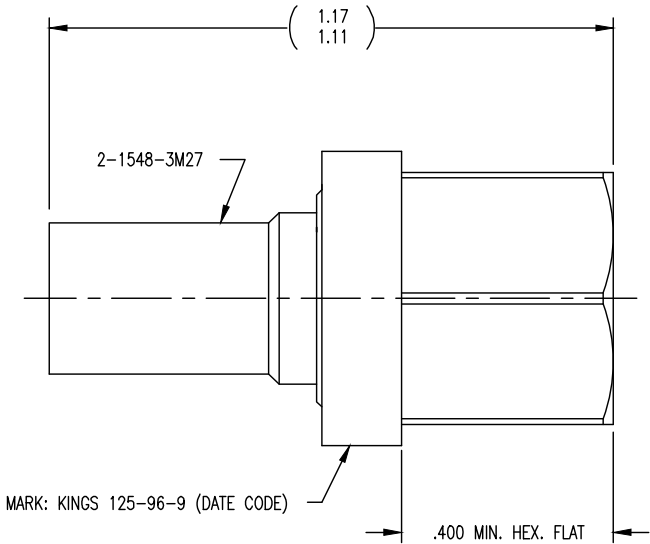

- NOTES:
1. FOR USE WITH BOEING BMS13-65 OG & ADAMS RUSSELL FC20Z CABLE.
 2. FOR CABLING INSTRUCTIONS SEE 3-546-1
 3. FOR CRIMPING USE DIE SIZE KTH-2216.
 4. INTERFACE PER MIL-STD-348 FIG. 313-1.
 5. CENTER CONTACT (1-569-35MA9) SUPPLIED UNASSEMBLED.
 6. MARK PACKAGE: KINGS 125-96-9 (DATE CODE)
 7. MATERIALS:
 - GASKET- SILICONE RUBBER, A-A-59588
 - INSULATOR- TEFLON, ASTM-D1710
 - K-GRIP SLEEVE- COMMERCIAL BRONZE , ASTM B135
 - OUTER CONTACT-BERYLLIUM COPPER, ASTM-B-196
 - C-RING- PHOSHOR BRONZE, ASTM B103
 - ALL OTHER METAL PARTS- BRASS, ASTM-B16
 8. FINISHES:
 - CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM-B-488 OVER .000050 MIN. NICKEL PER AMS-QQ-N-290 (RoHS)
 - ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290 OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
 9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE- 50 OHMS
 - FREQUENCY RANGE- 0 TO 11 GHz
 - WORKING VOLTAGE- 500 VOLTS RMS
 10. WEIGHT: 12.24 GRAMS

REVISIONS	
ISSUE	CHANGES
0	ER 34027 KH 07/29/92
B	REVISED PER DMF304 & ER33626 MARKUPS KPL 06/29/11
CUSTOMER SALES DRAWING	
THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.	
SCALE 4:1	
APPROX SURFACE AREA	
CAGE CODE: 91836	
USED ON	
REF: BOEING	
PLUG, TNC, HEX	
DRAWN KH	DATE 06/01/92
DESIGN JT	DATE 06/01/92
APPR.	DATE
KINGS by WINCHESTER REVISION 06 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06482	
125-96-9	

125-96-9