# RSE120151

| | |
|---|---|
| **Series:** | MIL-PRF-12883 |
| **Type:** | Low Profile |
| **Number of Poles:** | 4 |
| **Number of Contacts:** | 14 |
| **Number of Contacts per Size:** | 14 |
| **Contact Size:** | 20 |
| **With or Without Hardware:** | With |
| **With or Without Contacts:** | Without |
| **Configuration:** | A |
| **Amperage:** | 5 |
| **Mounting Stud:** | Fixed |
| **QPL:** | M12883/44-01 |
| **Mil-Spec:** | Active Mil-Spec |
| **Temperature (C°):** | -65 to 125 |
| **Insulation Resistance:** | 1000 Megaohms Min. |
| **Dielectric Withstanding Voltage:** | 1000 VRMS at Sea Level; 500 VRMS at 80,000 ft. |
| **Vibration:** | MIL-STD-202, Method 204 Test Condition G |
| **Shock:** | MIL-STD-202, Method 213 Test Condition C |
| **Body:** | Polyetherimide per ASTM-D5205 |
| **Grommet:** | Silicone Rubber per A-A-59588 |
| **Hardware Material:** | Stainless Steel or Steel with Cadmium Chromate Finish |
| **Contact Retainers:** | Stainless Steel |
| **Removable Socket Contacts:** | Copper Alloy, Hard Gold Plated in Accordance with MIL-G-45204 |
| **Configuration Drawing:** |   |
| **Mounting Panel Cutout Drawing:** |   |
| **Dimensions Drawing:** |  |
| **Mounting Instructions:** | 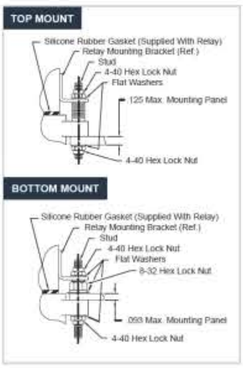  |
| **Engineering Drawing:** | Contact factory for drawing. |

© 2015 Amphenol PCD - all rights reserved - Home | News | Contact
visit Amphenol.com

Downloaded from Arrow.com.