


**nichicon**

# LQS



- Suited for high frequency regenerative voltage for AC servomotor, general inverter.
- Suited for equipment used at voltage fluctuating area.
- Suited for rectifier circuit of voltage doubler
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).

**LQS**

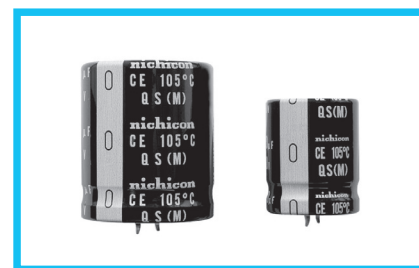

| Item                                   | Performance Characteristics                                                                                                                                                                                                                           |                      |      |      |                               |                                                                 |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------|------|-------------------------------|-----------------------------------------------------------------|
| Category Temperature Range             | - 25 to +105°C                                                                                                                                                                                                                                        |                      |      |      |                               |                                                                 |
| Rated Voltage Range                    | 350 to 450V                                                                                                                                                                                                                                           |                      |      |      |                               |                                                                 |
| Rated Capacitance Range                | 82 to 820μF                                                                                                                                                                                                                                           |                      |      |      |                               |                                                                 |
| Capacitance Tolerance                  | ± 20% at 120Hz, 20°C                                                                                                                                                                                                                                  |                      |      |      |                               |                                                                 |
| Leakage Current                        | $I \leq 3\sqrt{CV}$ (μA) (After 5 minutes' application of rated voltage at 20°C) [C : Rated Capacitance(μF), V : Voltage (V)]                                                                                                                         |                      |      |      |                               |                                                                 |
| Tangent of loss angle (tan δ)          | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                                 |                      |      |      |                               |                                                                 |
|                                        | Rated voltage (V)                                                                                                                                                                                                                                     | 350                  | 400  | 420  | 450                           |                                                                 |
|                                        | tan δ (max.)                                                                                                                                                                                                                                          | 0.15                 | 0.15 | 0.15 | 0.20                          |                                                                 |
| Stability at Low Temperature           | Rated voltage (V)                                                                                                                                                                                                                                     | 350 to 450           |      |      | Measurement frequency : 120Hz |                                                                 |
|                                        | Impedance ratio(max.)                                                                                                                                                                                                                                 | Z(- 25°C) / Z(+20°C) |      |      |                               |                                                                 |
|                                        |                                                                                                                                                                                                                                                       | 8                    |      |      |                               |                                                                 |
| Endurance of charge-discharge behavior | After an application of charge-discharge voltage for 50million times (charge-discharge voltage difference(ΔV) = rated voltage × 0.35, cycle 6Hz) at room temperature(15~35°C), capacitors shall meet the characteristics requirement listed at right. |                      |      |      | Capacitance change            | Within ±20% of the initial capacitance value                    |
|                                        |                                                                                                                                                                                                                                                       |                      |      |      | tan δ                         | 300% or less than the initial specified value                   |
|                                        |                                                                                                                                                                                                                                                       |                      |      |      | Leakage current               | Less than or equal to the initial specified value               |
|                                        |                                                                                                                                                                                                                                                       |                      |      |      | Appearance                    | There shall be found to remarkable abnormality on the capacitor |
| Endurance                              | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 105°C, the peak voltage shall not exceed the rated voltage.                           |                      |      |      | Capacitance change            | Within ±20% of the initial capacitance value                    |
|                                        |                                                                                                                                                                                                                                                       |                      |      |      | tan δ                         | 200% or less than the initial specified value                   |
|                                        |                                                                                                                                                                                                                                                       |                      |      |      | Leakage current               | Less than or equal to the initial specified value               |
| Shelf Life                             | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified value for endurance characteristics listed above.                    |                      |      |      |                               |                                                                 |
| Marking                                | Printed with white color letter on black sleeve.                                                                                                                                                                                                      |                      |      |      |                               |                                                                 |

Polarity bar

Sleeve (PET)

$\phi D+1.5 \text{ max.}$


$L \pm 2$

$\phi 4.0 \pm 0.5$

Pressure relief vent

$(70)$

$\pm$

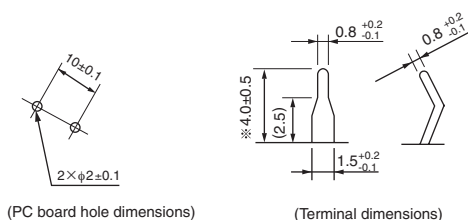

1 2 3 4 5 6 7 8 9 10 11 12 13 14

L Q S 2 G 1 8 1 M E L A 3 0

Series number

Rated voltage (400V)

Rated capacitance (1800pF)

Capacitance tolerance (±1%)

Configuration (axial leaded)

※ Please contact to us if other configurations are required.

※ Other terminations available upon request.  
Please refer to the Guidelines for Aluminum Electrolytic Capacitors.

- Dimension table in next page.

CAT.8100N

LQS

## ■ Dimensions

| 350V (2V)          |                                  |                                      |                         |                |
|--------------------|----------------------------------|--------------------------------------|-------------------------|----------------|
| Cap.<br>( $\mu$ F) | Size<br>$\phi$ D $\times$ L (mm) | Rated ripple<br>(mA <sub>rms</sub> ) | Leakage Current<br>(mA) | Code           |
| 120                | 22 $\times$ 25                   | 750                                  | 0.61                    | LQS2V121MELZ25 |
| 150                | 22 $\times$ 30                   | 820                                  | 0.68                    | LQS2V151MELZ30 |
| 180                | 22 $\times$ 30                   | 900                                  | 0.75                    | LQS2V181MELZ30 |
|                    | 25 $\times$ 25                   | 900                                  | 0.75                    | LQS2V181MELA25 |
| 220                | 22 $\times$ 35                   | 1000                                 | 0.83                    | LQS2V221MELZ35 |
|                    | 25 $\times$ 30                   | 1000                                 | 0.83                    | LQS2V221MELA30 |
| 270                | 22 $\times$ 40                   | 1100                                 | 0.92                    | LQS2V271MELZ40 |
|                    | 25 $\times$ 35                   | 1100                                 | 0.92                    | LQS2V271MELA35 |
|                    | 30 $\times$ 25                   | 1100                                 | 0.92                    | LQS2V271MELB25 |
| 330                | 22 $\times$ 45                   | 1200                                 | 1.01                    | LQS2V331MELZ45 |
|                    | 25 $\times$ 40                   | 1200                                 | 1.01                    | LQS2V331MELA40 |
|                    | 30 $\times$ 30                   | 1200                                 | 1.01                    | LQS2V331MELB30 |
| 390                | 25 $\times$ 45                   | 1300                                 | 1.10                    | LQS2V391MELA45 |
|                    | 30 $\times$ 35                   | 1300                                 | 1.10                    | LQS2V391MELB35 |
| 470                | 25 $\times$ 50                   | 1400                                 | 1.21                    | LQS2V471MELA50 |
|                    | 30 $\times$ 40                   | 1400                                 | 1.21                    | LQS2V471MELB40 |
| 560                | 35 $\times$ 30                   | 1400                                 | 1.21                    | LQS2V471MELC30 |
|                    | 30 $\times$ 45                   | 1500                                 | 1.32                    | LQS2V561MELB45 |
| 680                | 35 $\times$ 35                   | 1500                                 | 1.32                    | LQS2V561MELC35 |
|                    | 30 $\times$ 50                   | 1700                                 | 1.46                    | LQS2V681MELB50 |
| 820                | 35 $\times$ 40                   | 1700                                 | 1.46                    | LQS2V681MELC40 |
|                    | 35 $\times$ 45                   | 1900                                 | 1.60                    | LQS2V821MELC45 |

| 400V (2G)          |                                  |                                      |                         |                |
|--------------------|----------------------------------|--------------------------------------|-------------------------|----------------|
| Cap.<br>( $\mu$ F) | Size<br>$\phi$ D $\times$ L (mm) | Rated ripple<br>(mA <sub>rms</sub> ) | Leakage Current<br>(mA) | Code           |
| 100                | 22 $\times$ 25                   | 680                                  | 0.60                    | LQS2G101MELZ25 |
| 120                | 22 $\times$ 30                   | 730                                  | 0.65                    | LQS2G121MELZ30 |
| 150                | 22 $\times$ 35                   | 850                                  | 0.73                    | LQS2G151MELZ35 |
| 180                | 22 $\times$ 35                   | 950                                  | 0.80                    | LQS2G181MELZ35 |
|                    | 25 $\times$ 30                   | 950                                  | 0.80                    | LQS2G181MELA30 |
|                    | 30 $\times$ 25                   | 950                                  | 0.80                    | LQS2G181MELB25 |
| 220                | 22 $\times$ 45                   | 1100                                 | 0.88                    | LQS2G221MELZ45 |
|                    | 25 $\times$ 35                   | 1100                                 | 0.88                    | LQS2G221MELA35 |
|                    | 30 $\times$ 25                   | 1100                                 | 0.88                    | LQS2G221MELB25 |
| 270                | 22 $\times$ 50                   | 1220                                 | 0.98                    | LQS2G271MELZ50 |
|                    | 25 $\times$ 40                   | 1220                                 | 0.98                    | LQS2G271MELA40 |
|                    | 30 $\times$ 30                   | 1220                                 | 0.98                    | LQS2G271MELB30 |
|                    | 35 $\times$ 25                   | 1220                                 | 0.98                    | LQS2G271MELC25 |
| 330                | 25 $\times$ 45                   | 1440                                 | 1.08                    | LQS2G331MELA45 |
|                    | 30 $\times$ 35                   | 1440                                 | 1.08                    | LQS2G331MELB35 |
| 390                | 25 $\times$ 50                   | 1550                                 | 1.18                    | LQS2G391MELA50 |
|                    | 30 $\times$ 40                   | 1550                                 | 1.18                    | LQS2G391MELB40 |
|                    | 35 $\times$ 30                   | 1550                                 | 1.18                    | LQS2G391MELC30 |
| 470                | 30 $\times$ 45                   | 1680                                 | 1.30                    | LQS2G471MELB45 |
|                    | 35 $\times$ 35                   | 1680                                 | 1.30                    | LQS2G471MELC35 |
| 560                | 30 $\times$ 50                   | 1900                                 | 1.41                    | LQS2G561MELB50 |
|                    | 35 $\times$ 40                   | 1900                                 | 1.41                    | LQS2G561MELC40 |
| 680                | 35 $\times$ 45                   | 2120                                 | 1.56                    | LQS2G681MELC45 |

| 420V (W6)          |                                  |                                      |                         |                |
|--------------------|----------------------------------|--------------------------------------|-------------------------|----------------|
| Cap.<br>( $\mu$ F) | Size<br>$\phi$ D $\times$ L (mm) | Rated ripple<br>(mA <sub>rms</sub> ) | Leakage Current<br>(mA) | Code           |
| 100                | 22 $\times$ 25                   | 660                                  | 0.61                    | LQSW6101MELZ25 |
| 120                | 22 $\times$ 30                   | 810                                  | 0.67                    | LQSW6121MELZ30 |
|                    | 25 $\times$ 25                   | 810                                  | 0.67                    | LQSW6121MELA25 |
| 150                | 22 $\times$ 35                   | 840                                  | 0.75                    | LQSW6151MELZ35 |
|                    | 25 $\times$ 30                   | 840                                  | 0.75                    | LQSW6151MELA30 |
| 180                | 22 $\times$ 40                   | 910                                  | 0.82                    | LQSW6181MELZ40 |
|                    | 25 $\times$ 30                   | 910                                  | 0.82                    | LQSW6181MELA30 |
|                    | 30 $\times$ 25                   | 910                                  | 0.82                    | LQSW6181MELB25 |
| 220                | 22 $\times$ 45                   | 1050                                 | 0.91                    | LQSW6221MELZ45 |
|                    | 25 $\times$ 35                   | 1050                                 | 0.91                    | LQSW6221MELA35 |
|                    | 30 $\times$ 30                   | 1050                                 | 0.91                    | LQSW6221MELB30 |
| 270                | 25 $\times$ 40                   | 1250                                 | 1.01                    | LQSW6271MELA40 |
|                    | 30 $\times$ 30                   | 1250                                 | 1.01                    | LQSW6271MELB30 |
|                    | 35 $\times$ 25                   | 1250                                 | 1.01                    | LQSW6271MELC25 |
| 330                | 25 $\times$ 50                   | 1420                                 | 1.11                    | LQSW6331MELA50 |
|                    | 30 $\times$ 35                   | 1420                                 | 1.11                    | LQSW6331MELB35 |
|                    | 35 $\times$ 30                   | 1420                                 | 1.11                    | LQSW6331MELC30 |
| 390                | 30 $\times$ 40                   | 1610                                 | 1.21                    | LQSW6391MELB40 |
|                    | 35 $\times$ 35                   | 1610                                 | 1.21                    | LQSW6391MELC35 |
| 470                | 30 $\times$ 45                   | 1860                                 | 1.33                    | LQSW6471MELB45 |
|                    | 35 $\times$ 40                   | 1860                                 | 1.33                    | LQSW6471MELC40 |
| 560                | 35 $\times$ 45                   | 2100                                 | 1.45                    | LQSW6561MELC45 |
| 680                | 35 $\times$ 50                   | 2200                                 | 1.60                    | LQSW6681MELC50 |

| 450V (2W)          |                                  |                                      |                         |                |
|--------------------|----------------------------------|--------------------------------------|-------------------------|----------------|
| Cap.<br>( $\mu$ F) | Size<br>$\phi$ D $\times$ L (mm) | Rated ripple<br>(mA <sub>rms</sub> ) | Leakage Current<br>(mA) | Code           |
| 82                 | 22 $\times$ 25                   | 640                                  | 0.57                    | LQS2W820MELZ25 |
| 100                | 22 $\times$ 30                   | 690                                  | 0.63                    | LQS2W101MELZ30 |
|                    | 25 $\times$ 25                   | 690                                  | 0.63                    | LQS2W101MELA25 |
| 120                | 22 $\times$ 35                   | 720                                  | 0.69                    | LQS2W121MELZ35 |
|                    | 25 $\times$ 30                   | 720                                  | 0.69                    | LQS2W121MELA30 |
| 150                | 22 $\times$ 40                   | 790                                  | 0.77                    | LQS2W151MELZ40 |
|                    | 25 $\times$ 30                   | 790                                  | 0.77                    | LQS2W151MELA30 |
|                    | 30 $\times$ 25                   | 790                                  | 0.77                    | LQS2W151MELB25 |
| 180                | 22 $\times$ 45                   | 870                                  | 0.85                    | LQS2W181MELZ45 |
|                    | 25 $\times$ 35                   | 870                                  | 0.85                    | LQS2W181MELA35 |
|                    | 30 $\times$ 30                   | 870                                  | 0.85                    | LQS2W181MELB30 |
| 220                | 25 $\times$ 40                   | 1050                                 | 0.94                    | LQS2W221MELA40 |
|                    | 30 $\times$ 30                   | 1050                                 | 0.94                    | LQS2W221MELB30 |
|                    | 35 $\times$ 25                   | 1050                                 | 0.94                    | LQS2W221MELC25 |
| 270                | 25 $\times$ 50                   | 1230                                 | 1.04                    | LQS2W271MELA50 |
|                    | 30 $\times$ 35                   | 1230                                 | 1.04                    | LQS2W271MELB35 |
|                    | 35 $\times$ 30                   | 1230                                 | 1.04                    | LQS2W271MELC30 |
| 330                | 30 $\times$ 40                   | 1380                                 | 1.15                    | LQS2W331MELB40 |
|                    | 35 $\times$ 35                   | 1380                                 | 1.15                    | LQS2W331MELC35 |
| 390                | 30 $\times$ 50                   | 1610                                 | 1.25                    | LQS2W391MELB50 |
|                    | 35 $\times$ 40                   | 1610                                 | 1.25                    | LQS2W391MELC40 |
| 470                | 35 $\times$ 45                   | 1780                                 | 1.37                    | LQS2W471MELC45 |
| 560                | 35 $\times$ 50                   | 1990                                 | 1.50                    | LQS2W561MELC50 |

Rated ripple current (mA<sub>rms</sub>) at 105°C 120Hz

## ● Frequency coefficient of rated ripple current

| Frequency (Hz) | 50   | 60   | 120  | 300  | 1k   | 10k  | 50k or more |
|----------------|------|------|------|------|------|------|-------------|
| Coefficient    | 0.77 | 0.82 | 1.00 | 1.16 | 1.30 | 1.41 | 1.43        |