


SIOV nomenclature

CU	=	Chip encapsulated
4032	=	40/100" x 32/100" = 10,0 mm x 8,0 mm
K	=	Tolerance of V_v at 1 mA: $\pm 10 \%$
230	=	Max. AC voltage
G2	=	Taped and reeled (1000 pcs/reel)
K1	=	sealed type

Figure: Dimensions given in Millimeters (mm)

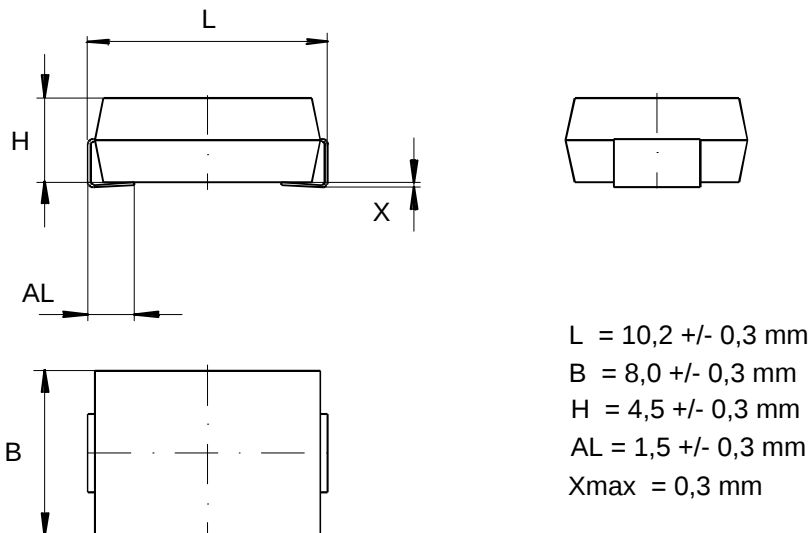


Electrical data:

Maximum ratings: ($T = 85^\circ\text{C}$)	Max. operating AC voltage	V_{RMS}	=	230V
	Max. operating DC voltage	V_{DC}	=	300V
	Surge current (8/20 μs) 1 time	I_{max}	=	1200A
	Energy absorption (2 ms)	W_{max}	=	17,0J
	Average power dissipation	P_{max}	=	0,25W
Characteristics: ($T = 25^\circ\text{C}$)	Varistor voltage at 1 mA	V_v	=	360V $\pm 10\%$
	Clamping voltage at 10 A	$V_{c max}$	=	595V
	Typ. capacitance at 1 kHz	C	=	115pF

ISSUE DATE	20.02.03	ISSUE	a	PUBLISHER	KB VS PE	PAGE	1/2
------------	----------	-------	---	-----------	----------	------	-----

Derating:

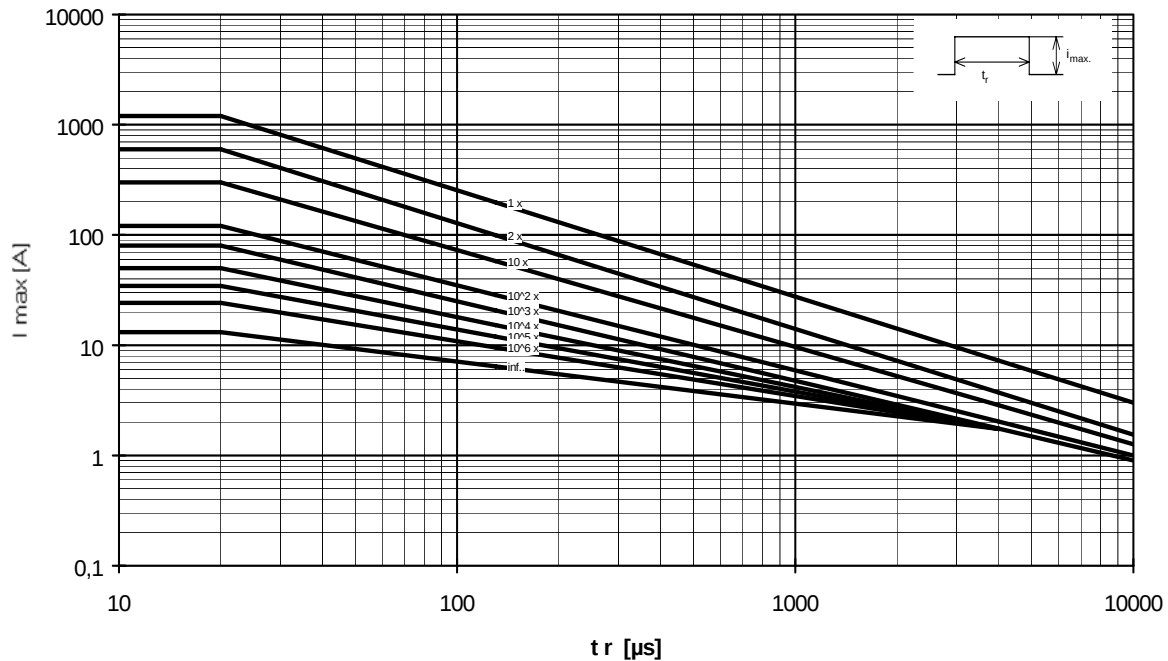

Note: More details can be found in the data book 'SIOV Metal Oxide Varistors', Ordering No. EPC: 62002-7600

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

ISSUE DATE	20.02.03	ISSUE	a	PUBLISHER	KB VS PE	PAGE	2/2
------------	----------	-------	---	-----------	----------	------	-----